

Mr. Lancaster

SANTA FE SAFETY FIRST

Every employe should promptly report any unsafe condition or practice to his foreman, some member of the Safety Committee or other proper company officer.

(See General Rules E, F, M and N, Book of Rules.)

ASSISTANT SUPERINTENDENT

W. BAXTER San Bernardino, Calif.

TRAINMASTERS

J. L. SCHROEDER Needles, Calif.
 C. F. LILLEY Barstow, Calif.
 G. E. YOUNG San Bernardino, Calif.
 R. C. VAN AUDSALL San Bernardino, Calif.
 J. R. MERRITT San Bernardino, Calif.
 J. M. WATKINS Los Angeles, Calif.
 R. F. NORLING Los Angeles, Calif.
 J. O. PHILLIPS Los Angeles, Calif.
 W. E. ADAMS Los Angeles, Calif.
 R. L. DIXON Los Angeles, Calif.
 W. H. LAWSON (Amtrak) Los Angeles, Calif.

ASSISTANT TRAINMASTERS

D. J. McDOUGAL Barstow, Calif.
 P. J. DeWOLF Barstow, Calif.
 W. C. LYMAN, JR. San Bernardino, Calif.
 D. G. McINNIS San Bernardino, Calif.
 N. C. ORFALL Fullerton, Calif.
 R. D. HARPER Fullerton, Calif.
 C. K. SEAMAN Los Angeles, Calif.
 D. E. BEAUCHAMP Los Angeles, Calif.
 A. L. McDANIEL San Diego, Calif.
 G. J. BUHLER Long Beach, Calif.

**SUPERVISOR OF AIR BRAKES
 GENERAL ROAD FOREMAN OF ENGINES**

E. F. POLLARD Barstow, Calif.

ROAD FOREMEN OF ENGINES

D. KEMP Los Angeles, Calif.
 J. E. THORNTON San Bernardino, Calif.
 E. J. MULLIGAN Barstow, Calif.
 F. V. DOBBS (Amtrak) Needles, Calif.
 B. T. JOHNSTON Needles, Calif.

CHIEF DISPATCHER

D. F. HODGES San Bernardino, Calif.

ASSISTANT CHIEF DISPATCHERS

G. A. WOLLERTON San Bernardino, Calif.
 E. L. MAYS San Bernardino, Calif.
 W. E. EBERT San Bernardino, Calif.
 E. M. BUTLER San Bernardino, Calif.

DISPATCHERS - SAN BERNARDINO

A. C. KIDD	H. F. BROWN
C. W. BURTON	D. R. MUNDAY
F. O. PIERCE	J. T. WALSH
W. R. HANSEN	D. E. PRYOR
L. A. WRIGHT	L. D. FAST
T. H. ESHELMAN	R. E. TIEDEMAN
E. M. ELLIS	G. L. ADAMS
N. C. PECK	K. W. JURE

The
**Atchison, Topeka and Santa Fe
 Railway Co.**



**LOS ANGELES AND
 LOS ANGELES TERMINAL
 DIVISION**

TIME TABLE No.

24

IN EFFECT

Sunday, June 10, 1973

At 12:01 A.M.

Pacific Standard Time

This Time Table is for the exclusive use
 and guidance of Employes.

D. G. RUEGG
General Manager
 LOS ANGELES, CALIF.

C. E. ROLLINS J. G. FRY L. B. ENGLISH
Asst. General Managers
 LOS ANGELES, CALIF.

R. L. BANION
Superintendent
 SAN BERNARDINO, CALIF.

L. D. EIDSON
Superintendent
 LOS ANGELES, CALIF.

2 LOS ANGELES DIVISION

NEEDLES DISTRICT

MAXIMUM AUTHORIZED DISTRICT SPEED FOR TRAINS Needles District Westward			Westward		TIME TABLE		Eastward			
			First Class		NO. 24		First Class			
			3		June 10, 1973		4			
Location	Pgr. and Light	MPH	Leave Daily	Ruling Grade Descending - Feet Per Mile	Capacity of Sidings In Feet	STATIONS	Mile Post	Capacity of Sidings In Feet	Ruling Grade Descending - Feet Per Mile	Arrive Daily
Needles to Goffs	79	60	AM 2:05	0.0	Yard	NEEDLES YL	578.0	Yard	74.4	AM 1:55
Goffs to Bagdad	90	60	2:15	0.0	5317	7.4	585.6		73.9	1:39
Bagdad to Pisgah	79	60	2:23	0.0	7329	6.8	592.4		104.5	1:32
Pisgah to Barstow	90	60	2:30	0.0	5418	4.5	597.0		73.9	1:28
"H" St. Crossing M.P. 578.1	15	15	2:36	0.0	6716	4.6	601.5		76.0	1:24
15 Curves M.P. 578.1 to 587.1	55	55	2:47	26.4	7318	7.6	609.1	7254	0.0	1:17
3 Curves M.P. 587.1 to 587.8	40	40	2:54	59.1	5454	9.6	618.7		0.0	1:08
3 Curves M.P. 587.8 to 589.3	55	55	2:59	57.0		7.5	626.2	5369	0.0	1:00
3 Curves M.P. 589.3 to 593.3	65	60	3:05	58.8	5383	8.5	634.7		0.0	12:53
Curve M.P. 593.3 to 593.8	45	45	3:15	53.0	7328	13.4	648.1	9292	0.0	12:41
11 Curves M.P. 593.8 to 603.3	65	60	3:24	53.8	5296	13.4	648.1	9292	29.0	12:41
2 Curves M.P. 608.3 to 609.1	70	70	3:30	11.8	5407	7.8	661.5	5406	35.9	12:31
4 Curves M.P. 669.6 to 672.1	75	70	3:38	0.0	6746	7.3	669.3	5022	75.0	12:25
10 Curves M.P. 672.1 to 678.1	65	60	3:52	17.9	5414	9.5	676.7		121.4	12:18
Curve M.P. 678.1 to 678.5	40	40	3:58	54.4		8.7	686.7	7113	31.1	12:09
Curve M.P. 678.5 to 679.9	60	60	4:14	49.1	6605	13.2	693.4	5054	57.0	12:03
Curve M.P. 679.9 to 680.3	40	40	4:30	55.4	7352	19.0	706.6	6682	0.0	11:51
3 Curves M.P. 680.3 to 682.7	60	60	4:40	13.7		12.0	725.6	5363	40.6	11:36
2 Curves M.P. 682.7 to 683.4	50	50	5:05	30.6		4.0	737.6		34.3	11:27
2 Curves M.P. 683.4 to 686.2	65	60	AM	48.3	Yard	4.3	741.6	3591	32.7	11:20
2 Curves M.P. 686.2 to 688.4	75	70	Arrive Daily			BARSTOW	746.4	Yard		PM
Curve M.P. 688.4 to 688.9	65	60				WEST (167.6) (165.0) EAST				
Curve M.P. 688.9 to 689.5	70	70								
Curve M.P. 689.5 to 692.9	70	70								
Curve M.P. 692.9 to 693.7	70	70								
4 Curves M.P. 693.7 to 694.9	50	50								
Curve M.P. 694.9 to 702.0	60	60								
5 Curves M.P. 702.0 to 707.8	70	70								
Curve M.P. 707.8 to 710.6	70	70								
Curve M.P. 710.6 to 745.0	50	50								
Curve M.P. 745.0 to 745.4	50	50								
2 Curves M.P. 745.4 to 745.7	40	40								

(55.8)

Average speed per hour.....

(63.9)

Trains must get clearance card before leaving Needles.

Trains must get clearance card before leaving Barstow; except may proceed on clear train order signal in lieu of clearance card.

Rule 95 Amended: Trains leaving Barstow may proceed on clear train order signal in lieu of clearance card and will continue the display of classification signals previously authorized. Any change in classification signals and numbers will be handled in the usual manner by numbered clearance card.

Rule 251 in effect:

Between M.P. 737.3 and Needles.

Rule 261 "TCS" in effect:

On three main tracks M.P. 745.3 to M.P. 743.7 and on two main tracks M.P. 743.7 to M.P. 737.3 and are numbered north to south 1-2 and 3.

At Nebo siding switches equipped with electric switch locks be governed by instructions posted in phone box.

Rule 6(A): Needles & Barstow C-R-Y
Cadiz & Ash Hill B-Y
all other sidings B

Rule 93: Yard limits located at: Needles.

Rule 93(A) in effect:

At Needles, between train signs located at east and west end of passenger yard.
At Barstow, between east and west towers.

Rule 301: At Barstow Signal 7464 at east end passenger yard located on north side of westward main track governs eastward movements on westward main track.

Helper locomotives at or near rear of train may use dynamic brake as follows:

Ash Hill to Bagdad
Goffs to Needles
Goffs to Cadiz
Pisgah to Hector

Between Barstow and Needles where district speed is 60 MPH for freight trains and locomotive will control speed not exceeding 70 MPH without use of air brakes, train may observe passenger train speed but not to exceed 70 MPH, provided tonnage does not exceed 5000 tons, does not average more than 70 tons per car, and train does not contain more than 90 cars.

Where train cannot be controlled without use of air brakes "freight train speed" will govern.

EXCEPTION: M.P. 686.2 to 671.4 speed is 45 MPH for all eastward freight trains qualifying above.

MAXIMUM AUTHORIZED DISTRICT SPEED FOR TRAINS
Needles District Eastward

LOCATION	M.P.H.	Fr.
	Psg. and Light	
Barstow to Pisgah	90	60
Pisgah to Bagdad	79	60
Bagdad to M.P. 642	90	60
M.P. 642 to Goffs	79	60
Goffs to Needles	79	45
3 Curves M.P. 745.7 to 745.0	40	40
5 Curves M.P. 710.6 to 707.9	65	60
2 Curves M.P. 707.8 to 706.0	75	70
Curve M.P. 702.0 to 701.5	50	50
7 Curves M.P. 701.5 to 696.1	75	70
2 Curves M.P. 696.1 to 694.9	60	60
4 Curves M.P. 694.9 to 693.6	50	50
Curve M.P. 693.6 to 692.6	70	70
Curve M.P. 689.5 to 688.9	70	70
Curve M.P. 688.9 to 688.4	65	60
2 Curves M.P. 688.4 to 686.2	70	70
2 Curves and Grade M.P. 686.2 to 683.4	70	30
2 Curves and Grade M.P. 683.4 to 680.8x	55	30
2 Curves and Grade M.P. 680.8x to 677.8	65	30
5 Curves and Grade M.P. 677.8 to 674.5	75	45
5 Curves and Grade M.P. 674.5 to 671.4	70	45
6 Curves M.P. 646.1 to 640.9	80	70
2 Curves M.P. 640.9 to 638.8	75	70
3 Curves M.P. 631.0 to 628.7	75	70
10 Curves M.P. 625.5 to 613.8	65	60
6 Curves M.P. 613.8 to 609.1	75	70
2 Curves M.P. 609.1 to 608.4	65	60
3 Curves M.P. 599.0 to 597.9	65	45
Curve M.P. 593.4x to 591.6	75	45
2 Curves M.P. 591.6 to 589.2	70	45
3 Curves M.P. 589.2 to 587.7	60	45
3 Curves M.P. 587.7 to 587.1	40	40
14 Curves M.P. 587.1 to 578.1	60	45
"H" St. Crossing M.P. 578.1	15	15

SWITCHES—MAXIMUM AUTHORIZED SPEED

Maximum speed permitted through all yard and roundhouse turnouts and crossovers—10 MPH; all main track turnouts and crossovers—15 MPH; except for spring and power controlled switches and crossovers at following locations:

- "I"—Interlocked Switch.
- "EE"—East End.
- "S"—Spring Switch.
- "WE"—West End.

Station	Type	Location	MPH
Needles	I	M.P. 578.4 crossover main track to westward freight lead	30
	I	M.P. 580.3 crossover main tracks	50
	I	WE westward freight lead	50
Java	S	EE eastward siding—WE westward siding	15
Ibis	S	WE westward siding	15
Bannock	S	WE westward siding	15
Homer	S	WE westward siding	15
Goffs	S	EE eastward siding—WE westward siding	15
Fenner	S	EE eastward siding—WE westward siding	15
Essex	S	EE eastward siding	15
Danby	S	EE eastward siding	15
	S	WE westward siding	15
Cadiz	S	WE westward siding	15
	S	EE eastward siding	15
Amboy	S	EE eastward siding—WE westward siding	15
Bagdad	S	EE eastward siding—WE westward siding	15
Siberia	S	EE eastward siding	15
	S	WE westward siding	15
Ash Hill	S	WE westward siding	15
	S	EE eastward siding	15
Ludlow	S	EE eastward siding—WE westward siding	15
Pisgah	S	EE eastward siding—WE westward siding	15
Newberry	S	EE eastward siding—WE westward siding	15
Daggett	I	Two main track crossovers	50
	I	Turnout to Union Pacific main track	30
	S	WE westward siding	15
Barstow	I	M.P. 743.6 two main track crossovers	50
	I	M.P. 743.6 turnout outbound lead	50
	I	M.P. 743.7 crossover eastward to westward main track	30
	I	M.P. 743.7 turnout track 3	30
	I	M.P. 745 main track and crossover switches to yard	30

RAILROAD CROSSINGS AT GRADE AND INTERLOCKINGS

Location	Tracks Governed	Rules
Needles: M.P. 578.4 and M.P. 580.3	Main track and connecting crossover.	Interlocking
Barstow East Tower	Main track and connecting crossovers.	Interlocking
Barstow West Tower	Main track and connecting crossovers.	See First District

STATIONS OR TRACKS NOT SHOWN IN SCHEDULE

Location	Mile Posts	Capacity in Feet	Switch Connection
Saltus	658.4	2590	East and West
Klondike	682.0	600	West
Lavic	702.7	1048	East and West
Hector	712.8	800	West
Minneola	731.7	800	West
Airport Spur	732.6	9048	East
Gale	735.3	3368	East and West
Cool Water	735.9	558	West

TRACK SIDE WARNING DEVICES

Location	Type	Signals Affected
M.P. 633.5 Westward Track	Hot Box	Rotating white lights at scanner (M.P. 631.3) and Locator (M.P. 633.5)
M.P. 648.1 Westward Track	Hot Box	Rotating white lights at scanner (M.P. 644.5) and Locator (M.P. 648.1)
M.P. 648.9 Eastward Track	Hot Box	Rotating white lights at scanner (M.P. 651.5) and Locator (M.P. 648.9)
M.P. 662.5 Eastward Track	Hot Box	Rotating white lights at scanner (M.P. 665) and Locator (M.P. 662.5)
M.P. 667 Westward Track	Hot Box	Rotating white lights at scanner (M.P. 665—M.P. 666) and Locator (M.P. 667)
M.P. 711.8 Westward Track	Hot Box	Rotating white lights at scanner (M.P. 709.1) and Locator (M.P. 711.8)
M.P. 714.3 Eastward Track	Hot Box	Rotating white lights at scanner (M.P. 716.4—M.P. 715.3) and Locator (M.P. 714.3)

When hot box signals activated, trains must stop, check locator, inspect train, and be governed by instructions in instrument case at locator.

LENGTH OF STEMS OF WYES

Location	Feet
Needles	401
Cadiz	Cadiz District
Ash Hill	410

4 LOS ANGELES DIVISION

FIRST DISTRICT

MAXIMUM AUTHORIZED DISTRICT SPEED FOR TRAINS				Westward		TIME TABLE						Eastward	
First District Westward				First Class		NO. 24						First Class	
LOCATION	MPH	Psgr. and Light	Frt.	3	Ruling Grade Descending—Feet Per Mile	Capacity of Sidings In Feet	NO. 24						4
							June 10, 1973						
				Leave Daily	Yard	STATIONS						Arrive Daily	
						BARSTOW							
Barstow to San Bernardino.....	79		60	AM 5.15	35.9	Yard	13.6						37.0
Adelanto Spur	15		15				HODGE						
Curve M.P. 0.0 to 0.6.....	30		30	AM 7.05	33.8	Yard	17.9						38.0
2 Curves M.P. 31.8 to 33.8.....	60		60				ORO GRANDE						
2 Curves M.P. 33.8 to 34.3.....	40		40	AM 7.05	37.0	Yard	5.2						37.0
3 Curves M.P. 34.3 to 36.6.....	55		55				VICTORVILLE						
Victorville M.P. 36.6 to 37.4.....	30		30	AM 7.05	0.0	Yard	1.3						15.8
4 Curves M.P. 37.4 to 39.9.....	45		45				FROST						
3 Curves M.P. 39.9 to 42.0.....	50		50	AM 7.05	0.0	Yard	7.1						83.4
Curve M.P. 42.0 to 43.7.....	55		55				HESPERIA						
Curve M.P. 48.1 to 48.8.....	65		60	AM 7.05	0.0	Yard	5.0						81.3
Curve M.P. 48.8 to 49.4.....	50		50				LUGO						
8 Curves M.P. 49.4 to 51.8.....	45		45	AM 7.05	158.4	Yard	5.8						84.5
8 Curves M.P. 51.8 to 56.1.....	55		55				SUMMIT						
Curve (South Track) M.P. 56.1 to 56.6.....	45		45	AM 7.05	116.2	Yard	8.9						0.0
Grade (South Track) M.P. 56.6 to 62.2.....	30		20				CAJON						
Curve (North Track) M.P. 56.1 to 56.6.....	45		45	AM 7.05	116.2	Yard	11.1						0.0
Grade (North Track) M.P. 56.6 to 64.3X.....	30		30				VERDEMONT						
Grade M.P. 62.2 to 72.6.....	40		35	AM 7.05	116.2	Yard	7.4						0.0
Grade M.P. 72.6 to 80.8.....	50		35				SAN BERNARDINO						
M.P. 80.8 to 81.5.....	20		20	Arrive Daily			South Track (80.8)						Leave Daily
							North Track (82.7)						

(44.1)

Average speed per hour.....

(42.1)

Trains must get clearance card before leaving San Bernardino; except at "A" Yard Office, may proceed on clear train order signal in lieu of clearance card.

Trains must get clearance card before leaving Barstow; except may proceed on clear train order signal in lieu of clearance card.

Rule 261 (TCS) in effect on Main Tracks between Barstow and San Bernardino.

The track to the right as viewed from a westward train is designated North Track and the track to the left is designated South Track.

Rule 6(A): Barstow and San Bernardino C-R-Y
Victorville C-R

Rule 93(A) in effect at Barstow, between East and West Towers.

Rule 301: Between Barstow and San Bernardino controlled and block signals located on field side of track.

At Barstow Signal 7464 at east end passenger yard located on north side of westward main track governs eastward movements on westward main track.

At Summit, westward passenger trains will make air brake test as prescribed Rule 41, Item D; Form 2501-A.

Between Victorville and Barstow, where district speed is 60 MPH for freight trains and locomotive will control speed not exceeding 70 MPH without use of air brakes, train may observe passenger train speed but not to exceed 70 MPH, provided tonnage does not exceed 5000 tons, does not average more than 70 tons per car and train does not contain more than 90 cars.

When train cannot be controlled without use of air brakes "freight train speed" will govern.

THE USE OF RETAINERS AND SPEED RESTRICTIONS ON FREIGHT TRAINS SUMMIT TO SAN BERNARDINO, WILL BE AS FOLLOWS:

1. Trains must not exceed an average of 115 tons per car, except unit trains with helper locomotive at or near rear of train must not exceed an average of 135 tons per car.

2. Between Summit and Cajon on South Track speed limit 15 MPH, except: When total brake pipe reduction does not exceed 18 lbs., average weight per car does not exceed 95 tons and total weight does not exceed 4500 tons, speed limit 20 MPH.

(A) Between Summit and Cajon, North Track and between Cajon and San Bernardino on both tracks, speed limit 20 MPH, except: When average weight per car does not exceed 95 tons and total weight does not exceed 6500 tons, speed limit 30 MPH.

(B) Between Cajon and San Bernardino, both tracks, when total weight does not exceed 5000 tons and dynamic brake will control speed of train, without the use of air brakes speed limit 35 MPH.

(C) Trains operated with "Remote Control Equipment" in service and trains with helper at or near rear of train, between Summit and Cajon North Track and between Cajon and San Bernardino both tracks, speed limit 20 MPH except: When total brake pipe reduction does not exceed 15 lbs., speed limit 30 MPH; When tonnage exceeds 6500 tons, speed limit 25 MPH; When tonnage exceeds 12,000 tons, speed limit 20 MPH.

3. On both tracks, between Summit and Cajon when total weight exceeds 3500 tons and between Cajon and San Bernardino when total weight exceeds 5000 tons, speed of train must not be controlled exclusively with dynamic brakes and locomotive brakes.

4. When locomotive will control speed of train and total brake pipe reduction does not exceed 18 lbs., train may proceed without retainers.

5. On either track between Summit and San Bernardino, when total brake pipe reduction exceeds 18 lbs., stop must be made immediately and to control speed of train a sufficient number of retainers must be set in high pressure position and brake system must be fully charged before proceeding. If necessary to hold train while the brake system is being recharged, starting behind locomotive, set a sufficient number of hand brakes. If this stop is made between Summit and Cajon, under these conditions, a 10 minute wheel cooling stop must be made at Verdemon.

6. On South Track between Summit and Cajon, at any time a train stops, the brake system must be fully charged before proceeding. If necessary to hold train while brake system is being recharged and before releasing air brakes, starting behind locomotive, set a sufficient number of retainers and/or hand brakes.

7. When it is known before reaching Summit that locomotive consist does not have operative dynamic brake, one retainer for each 70 tons must be set in high pressure position before leaving Summit and make a 10-minute cooling stop at Verdemon.

8. When retainers are used, not less than fifteen (15) must be set.

9. When retainers are positioned before reaching Summit or retainers are not required and it is known by Conductor and Enginemen that prescribed brake pipe pressure is indicated on gauges, train may proceed without stopping; otherwise, Rule 942 will apply.

FIRST DISTRICT

MAXIMUM AUTHORIZED DISTRICT SPEED FOR TRAINS

LOCATION	First District Eastward	Psg. and Light	MPH	Frt.
San Bernardino to Barstow		79		60
Adelanto Spur		15		15
M.P. 81.5 to 80.8		20		20
2 Curves M.P. 80.8 to 78.3		60		60
4 Curves M.P. 72.6 to 70.8		45		45
6 Curves M.P. 70.8 to 66.9		50		50
8 Curves M.P. 66.9 to 64.2		40		40
3 Curves M.P. 64.2 to 62.2		50		50
15 Curves (South Track) M.P. 62.1 to 57.1		30		30
2 Curves (South Track) M.P. 57.1 to 56.1		45		45
18 Curves (North Track) M.P. 64.3x to 57.4x		30		30
2 Curves (North Track) M.P. 57.4x to 56.1		45		45
8 Curves M.P. 56.1 to 51.8		55		55
8 Curves M.P. 51.8 to 49.4		45		45
Curve M.P. 49.4 to 48.8		50		50
Curve M.P. 48.8 to 48.1		65		60
Curve M.P. 43.7 to 42.0		55		55
3 Curves M.P. 42.0 to 39.9		50		50
4 Curves M.P. 39.9 to 37.4		45		45
Victorville M.P. 37.4 to 36.6		30		30
3 Curves M.P. 36.6 to 34.3		55		55
2 Curves M.P. 34.3 to 33.8		40		40
2 Curves M.P. 33.8 to 31.8		60		60
Curve M.P. 0.6 to 0.0		30		30

Helper locomotives at or near rear of train may use dynamic brake:
Summit to Victorville
Summit to San Bernardino

SWITCHES—MAXIMUM AUTHORIZED SPEED

Trailing movements, spring point derails: MPH
Adelanto Spur, one-fourth mile from main track 10
Maximum speed permitted through all yard and roundhouse turnouts and crossovers—10 MPH; all main track turnouts and crossovers—15 MPH, except for power controlled switches and crossovers at following locations:

"I"—Interlocked Switch. "WE"—West End.

Station	Type	Location	MPH
Barstow	I	Crossover M.P. 2.0	30
Barstow	I	WE siding M.P. 2.0	30
Hodge	I	Two crossovers	50
Frost	I	Two crossovers	50
Lugo	I	Two crossovers	50
Summit	I	Two crossovers	50
Cajon	I	Two crossovers	50
Verdemont	I	Two crossovers	50

STATIONS OR TRACKS NOT SHOWN IN SCHEDULE

Location	Mile Post	Capacity in Feet	Switch Connection
Lenwood	4.8	390	East (South Track)
Helendale	21.1	1051	East and West (North Track)
Helendale	21.1	1050	East and West (South Track)
Adelanto Spur	34.4	5 Miles	West (North Track)
Thorn	41.1	2995	East and West (North Track)
Summit	54.4	3500	East (North Track)
Alray	59.7x	900	East (North Track)
Keenbrook	66.3	1580	East (North Track)
Devore	71.0	1700	East and West (South Track)
Ono	75.5	1200	West (North Track)
Ono	76.0	697	West (South Track)

RAILROAD CROSSINGS AT GRADE AND INTERLOCKINGS

Location	Tracks Governed	Rules	Whistle Signals Additional to Rule 14(Z)
Barstow West Tower	Main track and connecting crossover. Siding South Track	Interlocking	To Mojave District — — 0 Engine lead 00 — 0 Switch tail 0000 Tracks 1 to 17 Incl. 0 — 00 Tracks 18 to 30 Incl. — 0 — 0

6 LOS ANGELES DIVISION

SECOND AND REDLANDS DISTRICTS

Capacity of Sidings In Feet	Communications Turn Tables and Wyes	Ruling Grade Ascending— Feet Per Mile	Westward		TIME TABLE NO. 24 June 10, 1973	Eastward		Mile Post	Ruling Grade Ascending— Feet Per Mile
			First Class			First Class			
			3	4		3	4		
Yard	C-R-Y	64.9	Leave Daily		STATIONS		Arrive Daily		
2647		32.4	AM 7.10		SAN BERNARDINO YL	3.6	PM 9.09	81.3	0.0
Yard	C-R	14.3	7.17		RIALTO YL	6.8	8.59	84.9	38.7
2570	B	14.3	7.23		KAISER YL	2.0	8.54	91.8	37.7
3154	C-Y	56.4			ETIWANDA YL	3.9	8.49	93.7	32.0
2363	C	30.6	7.29		CUCAMONGA YL	3.2	8.46	97.7	19.3
2792		0.0	7.33		UPLAND S. P. Crossing	3.9	8.42	100.9	42.2
3079	C	0.0	7.38		CLAREMONT S. P. Crossing	1.9	8.39	104.8	59.1
1919		0.0	7.45		POMONA	3.6		108.7	63.4
2820	B	0.0			SAN DIMAS	4.1		110.2	63.4
	C-Y	39.6	7.55		GLENDORA	2.5	8.28	114.4	63.4
3213		0.0	7.58		AZUSA	1.4	8.25	116.9	75.0
2561	B	26.4	8.01		KINCAID	2.0	8.23	118.2	81.3
		75.0	8.05		BUTLER	2.3	8.20	120.2	60.7
852		75.2	8.12		MONROVIA	1.7	8.20	122.4	26.4
2454		63.4	8.30		ARCADIA	3.1	8.14	124.2	0.0
1702	C	0.0	8.38		CHAPMAN	0.8	8.14	127.8	0.0
1698		31.7	8.50		LAMANDA PARK	3.6	8.00	128.0	95.0
890		0.0			PASADENA YL	2.0	8.00	131.7	114.6
		0.0			SOUTH PASADENA	0.5	7.47	133.7	88.7
		0.0			OLGA	4.5	7.47	134.2	106.9
		0.0			U. P. Crossing WATER STREET YL	0.7	7.34	138.7	89.8
		0.0			BROADWAY	0.6	7.34	139.4	37.0
	C-Y	0.0			MISSION TOWER	0.8	7.30	140.1	69.7
Yard		0.0	9.05 AM		LOS ANGELES Union Station (59.5)	1.1	7.30 PM		31.7
Yard	B-R	0.0			FIRST STREET	(59.8)		141.1	
			Arrive Daily				Leave Daily		

(31.0) Average speed per hour (36.1)

Regular trains must get clearance card before leaving San Bernardino. Extras need not secure clearance card before leaving San Bernardino on Second District. Westward extras that are to operate west of Upland must secure clearance card before leaving Kaiser. Extra trains and engines must contact West Yard Tower Operator, or Kaiser Operator, to determine that there are no conflicting movements before occupying Second District main track between San Bernardino and Kaiser. Extra trains and engines must, after using Second District main track from San Bernardino and Kaiser, notify West Yard Tower Operator, or Kaiser Operator, as soon as main track has been cleared.

Trains originating Los Angeles Union Station and First Street must get clearance card before leaving Mission Tower.

At Los Angeles: Rules and Regulations of Union Station must be observed within terminal limits.

Rule 261 (TCS) in effect:

On two main tracks between Mission Tower and Broadway, and on main track Broadway to Redondo Jct.

On two main tracks at San Bernardino, between interlocked switches 5th Street and interlocked switches "A" Yard Office.

Rule 93: Yard limits located at:

San Bernardino to and including Upland, Pasadena and Water Street to Broadway.

San Bernardino, interlocking signals when displaying a single yellow aspect will be "APPROACH-RESTRICTING" with the indication "PROCEED-PREPARED TO ENTER TURNOUT OR TO STOP SHORT OF TRAIN OR OBSTRUCTION."

STATIONS OR TRACKS NOT SHOWN IN SCHEDULE

Location	Mile Post	Capacity in Feet	Switch Connection
Rialto Foothill Spur	85.8	4100	West
Fontana	88.8	700	East and West
Muscat Spur	90.4	Lgh. 1.1 m.	West
Gallo Spur	94.6	2200	West
Rochester	95.0	460	East
Cucamonga Foothill Spur	95.8	Lgh. 5.1 m.	East and West
La Verne	107.9	750	East
Metropolitan Spur	108.6	Lgh. 1.0 m.	West
Duarte	121.0	764	East and West
Raymond	132.7	475	West
Highland Park	135.9	250	East
Redlands District			
Nevada Street	6.7	750	East and West
Craf	11.4	188	East

SECOND AND REDLANDS DISTRICTS

LOS ANGELES DIVISION 7

MAXIMUM AUTHORIZED DISTRICT SPEED FOR TRAINS

LOCATION	Second District		MPH
	Psg. and Light	Fr.	
San Bernardino to Upland	90	60	60
Upland to Los Angeles	65	60	60
Rialto, Cucamonga, Foothill Spurs, Muscat and Metropolitan Spurs	15	15	15
San Bernardino and Rialto M.P. 82.6 to 85.2	30	30	30
Fontana M.P. 88.5 to 88.9	50	50	50
4 Curves M.P. 98.2 to 100.5	75	60	60
Upland S.P. Crossing M.P. 101.0	40	40	40
Pomona M.P. 106.2 to 107.0	40	40	40
La Verne M.P. 107.0 to 108.8	45	45	45
4 Curves M.P. 111.8 to 114.3	55	55	55
2 Curves M.P. 118.8 to 119.7	55	50	50
3 Curves M.P. 126.8 to 127.6	45	45	45
M.P. 127.6 to 129.6	30	30	30
M.P. 129.6 to 131.8 Curve and Crossings	20	20	20
M.P. 131.8 to 135.5	30	30	30
7 Curves M.P. 135.5 to 138.3	25	25	25
U.P. Crossing and 4 Curves M.P. 138.3 to 140.0	20	20	20
Curve M.P. 140.0 to 140.2	15	15	15
REDLANDS DIST.	20	20	20
San Bernardino, "G" St. Crossing M.P. 0.7	5	5	5
Crossings M.P. 0.7 to 3.1	15	15	15
Redlands, St. Crossing M.P. 8.9	15	15	15
Mentone, St. Crossing M.P. 12.0	10	10	10
Malino Boulder Ave. M.P. 17.9	10	10	10

SWITCHES—MAXIMUM AUTHORIZED SPEED

Trailing movements, spring point details:	MPH
Rialto Foothill Spur, 300 ft. north S.P. Crossing	10
Cucamonga Foothill Spur, 300 ft. north S.P. Crossing	10
Metropolitan Spur, 4068 ft. from main track	10

Maximum speed permitted through all yard and roundhouse turnouts and crossovers—10 MPH; all main track turnouts and crossovers—15 MPH; except for spring and power controlled switches and crossovers at following locations:

"Y"—Interlocked Switch.	"EE"—East End.
"S"—Spring Switch.	"WE"—West End.



SECOND DISTRICT

San Bernardino	I	Crossover between main tracks east of Bridge 82.1	30
Kaiser	S	EE siding	15
Glendora	S	EE and WE siding	15
Pasadena	S	EE and WE siding	15
Broadway	I	Two track junction switch	30

RAILROAD CROSSINGS AT GRADE AND INTERLOCKINGS

Location	Tracks Governed	Rules	Whistle Signals Additional to Rule 14(Z)
San Bernardino: West Yard Tower	Second and Third District main tracks at west end bridge 82.1. End of two tracks and freight yard at east end bridge 82.1. Main track, connecting crossover and Junction Third District "A" yard office.	Interlocking	Second District — Third District —0 A Yard to B Yard —00 B Yard to Second District —0000 House lead to main line — Switch lead 0— A Yard lead 0000 Engine lead —0 Second District to B Yard —000 B Yard to A Yard —00
South "E" Street Rialto Foothill Spur Cucamonga Foothill Spur Upland Claremont Water Street (0.7 Mi. East) Mission Tower	S. P. Crossing. S. P. Crossing. S. P. Crossing. S. P. Crossing. U. P. Crossing. S. P. and U. P. Crossing. To and from LAUPT.	98-A, 98-B 98-A, 98-B. 98-A, 98-B. Main track and siding, when home signals in stop position, 98-B, 320(A). When home signals in stop position, 98-B, 320(A). When gate across Santa Fe track, 98-B. Interlocking. When necessary make movement governed by Rule 321(A), examination each interlocked switch and derail not required. Whistle signals for Mission Tower will be sounded passing microphones located M.P. 135.8 for westward train movements; and, at automatic block signal 1381 located at M.P. 138.3 for yard movements, and at Signal 1404 for eastward movements.	

REDLANDS DISTRICT

Communications Turn Tables and Wyes	Capacity of Sidings In Feet	Ruling Grade Ascending— Feet Per Mile	WESTWARD	TIME TABLE	EASTWARD	Mile Post	Ruling Grade Ascending— Feet Per Mile
				NO. 24 June 10, 1973			
	708	89.5		PATTON 1.0		19.7	0.0
B	1220	83.2		HIGHLAND		18.7	70.5
	1230	88.5		EAST HIGHLANDS		16.2	0.0
C	790	0.0		MENTONE 4.1		12.0	118.2
B		101.3		REDLANDS 3.2		8.8	118.2
C-R-Y	Yard			S. P. Crossing SAN BERNARDINO 8.5		0.0	
				(19.9)			

LENGTH OF STEMS OF WYES

Location	Feet
San Bernardino	3rd Dist. Main Track
San Bernardino	Precooler Lead
Cucamonga	Foothill Spur
Azusa	147
Mission Tower	L.A.U.P.T.

No switch lights on Redlands District.
Yard limits Patton to San Bernardino, inclusive.

Normal position of junction switches
San Bernardino for First District.

8 LOS ANGELES DIVISION

THIRD DISTRICT

WESTWARD				Ruling Grade Ascending— Feet Per Mile	TIME TABLE				Mile Post	Communications Turn Tables and Wyes	Capacity of Sidings in Feet	Ruling Grade Ascending— Feet Per Mile	EASTWARD				
FIRST CLASS					NO. 24								FIRST CLASS				
77	75	73	71		June 10, 1973								70	72	74	76	
Leave Fri., Sun.	Leave Daily	Leave Daily	Leave Daily	STATIONS				Arrive Daily	Arrive Daily	Arrive Fri., Sun.	Arrive Daily						
				25.0	SAN BERNARDINO YL				0.0	C-R-Y	Yard						
				0.0	2.2 RANA YL				1.6			52.8					
				21.1	1.3 COLTON YL				2.9	O	Yard	52.8					
				21.1	3.8 S. P. Crossing				6.7	B	Yard	52.8					
				0.0	2.6 HIGHGROVE				9.2	C-R							
				63.4	0.6 RIVERSIDE YL				9.8	O	Yard	13.2					
				21.1	4.2 CASA BLANCA				14.0	Y	4934	52.8					
				0.0	2.4 ARLINGTON				18.4		3095	52.8					
				0.0	3.3 MAY				20.2	B	4692	52.8					
				0.0	3.1 PORPHYRY				22.8	B-Y	8059	52.8					
				24.3	1.3 CORONA				24.1	C-R	8370	27.3					
				21.1	5.0 PRADO DAM				29.2	B	4735	52.8					
				0.0	7.2 ESPERANZA				36.4	B	6359	52.8					
				10.6	4.3 ATWOOD				40.6	B-Y		42.2					
				0.0	2.3 PLACENTIA				43.0			42.2					
PM	PM	PM	AM	0.0	3.0 FULLERTON				165.0	C-R		38.4	AM	AM	PM	PM	
10.30	6.30	3.00	9.00	12.7	6.3 LA MIRADA				158.7	B	Yard	9.2	8.35	11.05	5.05	8.30	
10.36	6.36	3.06	9.06	37.0	4.3 SANTA FE SPRINGS				154.4	O	4300	17.6					
				23.2	1.3 LOS NIETOS				153.1	B		26.9					
				17.1	0.9 D. T. JUNCTION				152.1	B		4.2	8.19	10.49	4.49	8.14	
				0.0	1.0 S. P. Crossing				151.2	R	Yard	0.0					
				22.7	1.3 PICO RIVERA				149.8	B		52.8					
				19.0	4.3 BANDINI				145.5	C-R	Yard	0.0	8.12	10.42	4.42	8.07	
				37.0	2.3 HOBART				143.2	R-T-Y		0.0					
				37.0	2.1 REDONDO JCT.				141.1	B-R	Yard	0.0					
				59.7	0.9 FIRST STREET				140.1	C-Y		0.0					
				71.8	0.8 MISSION TOWER							31.7	8.03	10.33	4.33	7.58	
11.05	7.05	3.35	9.35		0.8 LOS ANGELES								8.00	10.30	4.30	7.55	
PM	PM	PM	AM		Union Station								AM	AM	PM	PM	
Arrive Fri., Sun.	Arrive Daily	Arrive Daily	Arrive Daily		WEST (72.1) (71.4) EAST								Leave Daily	Leave Daily	Leave Fri., Sun.	Leave Daily	

(43.7) (43.7) (43.7) (43.7) Average speed per hour (43.7) (43.7) (43.7) (43.7)

Trains originating Los Angeles Union Station must get clearance card before leaving Mission Tower. Trains originating First Street or Hobart must get clearance card before leaving Hobart.

Trains from Harbor District en route Third District must get clearance card before leaving Hobart.

At Riverside Jct.; Eastward trains may proceed with current of traffic on clear train order signal in lieu of clearance card and display classification signals previously authorized.

AT SAN BERNARDINO, Trains must get clearance card before leaving San Bernardino; except, trains operating on main track may proceed on clear train order signal at "A" yard office in lieu of clearance card.

At Los Angeles: Rules and regulations of Union Station must be observed within terminal limits.

Rule 251 in effect at following locations;
Between west end of Bridge 4.6 and Riverside Jct. (Westward Track only).
Between La Mirada and D.T. Jct.

Rule 261 (TCS) in effect at following locations;
Main Tracks San Bernardino interlocked switches 5th Street to Bridge 4.6 (Eastward Main Track only) Bridge 4.6 to Riverside Jct.
Main Tracks Riverside Jct. to La Mirada M.P. 159.5.
Main Tracks D.T. Jct. to Redondo Jct. Interlocking.
Main Track Redondo Jct. Interlocking to Mission Tower.

Rule 93: Yard limits located at:
San Bernardino to and including Colton and at Riverside.

THIRD DISTRICT

MAXIMUM AUTHORIZED DISTRICT SPEED FOR TRAINS

LOCATION	Pgr. and Light	MPH	
			Frt.
San Bernardino to La Mirada	79		60
La Mirada to Los Angeles	65		60
Prenda and La Habra Valley Spurs	15		15
2 Curves M.P. 0.0X to M.P. 1.5X	15		15
2 Curves and Bridge M.P. 0.0 to M.P. 0.9	15		15
7 Curves and Colton M.P. 0.9 to M.P. 3.2	20		20
Westward track (North track)			
2 Curves and Bridge M.P. 3.5 to M.P. 4.6	40		40
3 Curves M.P. 4.9 to M.P. 5.6	75		60
3 Curves M.P. 6.4 to M.P. 6.8	45		45
Curve M.P. 9.4 to M.P. 9.6	60		60
4 Curves M.P. 9.6 to M.P. 10.0	30		30
Westward movements on South track M.P. 4.6 to M.P. 6.4	40		40
3 Curves M.P. 6.4 to M.P. 6.8	30		30
M.P. 6.8 to M.P. 10.0	40		40
South track (Eastward track)			
Curve M.P. 9.6 to M.P. 9.4	60		60
Curve M.P. 8.5 to M.P. 8.3	75		60
3 Curves M.P. 6.8 to M.P. 6.4	30		30
Curve M.P. 5.6 to M.P. 5.5	75		60
Curve and Bridge M.P. 5.0 to M.P. 4.5	40		40
2 Curves M.P. 4.4 to M.P. 3.2	30		30
3 Curves M.P. 10.4 to 11.7	65		60
2 Curves M.P. 11.9 to 12.5	50		50
Curve M.P. 14.7 to 14.9	75		60
3 Curves M.P. 15.5 to 16.7	55		55
Curve M.P. 16.9 to 17.1	65		60
Corona M.P. 22.5 to 25.8	30		30
Curve M.P. 30.4 to 30.7 (Westward movement)	65		60
Curve M.P. 31.2 to 30.4 (Eastward movement)	65		60
4 Curves M.P. 31.3 to 32.8	60		60
3 Curves M.P. 33.6 to 35.1	50		50
3 Curves M.P. 35.2 to 37.1	65		60
2 Curves M.P. 37.5 to 38.5	60		60
Placentia M.P. 42.7 to 43.6	50		50
2 Curves M.P. 45.2 to 45.7	50		50
Fullerton M.P. 165.2 to 164.7	30		30
Curve M.P. 161.1 to 160.8	75		60
Curve M.P. 156.6 to 155.9	60		60
Crossing and Curve M.P. 144.5 to 143.4	30		30
2 Curves M.P. 143.4 to 142.9	15		15
3 Curves M.P. 141.1 to 140.2	35		35
Curve M.P. 140.2 to 140.0	15		15

SWITCHES—MAXIMUM AUTHORIZED SPEED

Trailing movements, spring point derails:	MPH
Rana, switching lead	10
Prenda Spur, one-fourth mile from main track	10

Maximum speed permitted through all yard and roundhouse turnouts and crossovers—10 MPH; all main track turnouts and crossovers—15 MPH; except for spring and power controlled switches and crossovers at following locations:
 "I"—Interlocked Switch. "EE"—East End.
 "S"—Spring Switch. "WE"—West End.

Station	Type	Location	MPH
Rana	I	Junction switch and crossover	30
Colton	I	WE eastward siding, near Bridge 4.6	30
	I	Two-track junction switches, east and west ends of Bridge 4.6	40
Highgrove		Junction of eastward main with San Jacinto District	30
Riverside Junction	I	Union Pacific junction switch and crossover	15
Riverside Junction	I	Union Pacific junction switch when not using crossover	30
Riverside	I	Two-track junction switch	30
Atwood	I	Two-track junction switch	40
	I	Olive District junction switch	40
Fullerton	I	Fourth District two track junction switch	50
	I	Two crossovers M.P. 45.5	50
La Mirada	I	Two crossovers	50
	I	Switch to industrial lead	15
Santa Fe Springs	S	WE siding	15
D. T. Jct.	I	Two crossovers	50
Bandini	I	Two crossovers	50
Eastern Ave.	I	Main track crossovers and lead switch	40
M.P. 144.7	I	Two crossovers	30

STATIONS OR TRACKS NOT SHOWN IN SCHEDULE

Location	Mile Posts	Capacity in Feet	Switch Connection
Pachappa	12.4		
Prenda Spur (Prenda)	14.3	Lgh. 2.1 m.	East and West
La Sierra	18.5	440	West
Buena Park	160.5	725	East and West
Standard Oil Spur	160.8	425	East
Wilshire	156.8	2900	East and West
Mojave Spurs	155.8	1375	West
Stephens Spur	155.5	675	East and West
La Habra Valley Spur	154.6	Lgh. 1.2 m.	West

San Bernardino to and including Rana, interlocking signals when displaying a single yellow aspect will be "APPROACH-RESTRICTING" with the indication "PROCEED PREPARED TO ENTER TURNOUT OR TO STOP SHORT OF TRAIN OR OBSTRUCTION."

LENGTH OF STEMS OF WYES

San Bernardino	3rd Dist. Main Track
San Bernardino	Precooler Lead
Casa Blanca	Prenda Spur
Porphyry	Elsinore Dist. Main Track
Atwood	600
Redondo Junction	Main Track
Mission Tower	L.A.U.P.T.

RAILROAD CROSSINGS AT GRADE AND INTERLOCKINGS
THIRD DISTRICT

Location	Tracks Governed	Rules	Whistle Signals Additional to Rule 14(Z)
San Bernardino: Rana Colton Tower	See West Yard Tower, Second District All switches. S. P. Crossing. Two track junction switches, Bridge 4 6.	Interlocking. Interlocking.	To or from U. P. —0 To or from S. P. 0— From Santa Fe westward main to U. P. eastward main —0 From U. P. westward main to Santa Fe eastward main —0 From U. P. westward main to Santa Fe westward main —0000
Riverside Junction May Fullerton Los Nietos D. T. Junction Hobart Yard: M.P. 147—M.P. 148 Hobart Tower	S. P. and U. P. Crossing, Junctions, and Crossover. S. P. Junction. U. P. Crossing. S. P. Crossing. S. P. Crossing. All tracks. U. P. Crossing.	Interlocking TCS TCS When home signals in stop positions, 98-B, 320(B). Interlocking. Interlocking. Interlocking	
Redondo Junction	U. P. Crossing.	Interlocking	Butte St. Transfer 00—0 To Harbor Dist. —0 To 9th St. Yard —0 Levee Track 0—00
Mission Tower	S. P. and U. P. Crossing. To and from LAUPT.	Interlocking. When necessary make movement governed by Rule 321(A), examination each interlocked switch and derail not required. Whistle signals for Mission Tower will be sounded passing microphones located M.P. 135.8 for westward train movements; and, at automatic block signal 1381 located at M.P. 138.3 for yard movements, and at signal 1404 for eastward movements.	Union Station 0— Old main 00—0 Cudahy lead —0— Against current of traffic —0000 S. P. Downey Ave. 000—

FOURTH DISTRICT

RAILROAD CROSSINGS AT GRADE AND INTERLOCKINGS

Location	Tracks Governed	Rules
Anaheim (2.0 Mi. East)	S. P. Crossing.	TCS
Anaheim Sugar Factory Spur	U. P. Crossing.	98-A, 98-B.

LENGTH OF STEMS OF WYES

Location	Feet
Orange	Olive Dist. Main Track
Fallbrook Jct.	Fallbrook Dist. Main Track
Escondido Jct.	Escondido Dist. Main Track
Del Mar	690
Miramar	Camp Elliott Spur
San Diego	Harasthy Street Marine Base Spur
National City	1219

STATIONS OR TRACKS NOT SHOWN IN SCHEDULE

Location	Mile Posts	Capacity in Feet	Switch Connection
Irvine Spur	178.7	Lgh. 6.8 m.	East
Browning	180.8	1080	East
Tustin	181.5		
Frances	183.1	1467	East and West
Kathryn	183.9	1000	East
Como	180.1	2034	East and West
Las Flores	218.7		
Stuart	221.7	2543	East and West
Carlsbad	229.3	2500	West
San Diego G. & E. Co. Spur	231.3	1005	East
Cardiff	239.8	468	West
Solana Beach	241.9	436	East
Miramar Navy Spur	253.0	Lgh. 5.5 m.	East and West
Pacific Beach	260.3	634	East and West

FOURTH DISTRICT

LOS ANGELES DIVISION 11

Communications Turn Tables and Wyes	Capacity of Sidings In Feet	Rolling Grade Ascending— Feet Per Mile	WESTWARD				TIME TABLE NO. 24 June 10, 1973	Mile Post	EASTWARD				Rolling Grade Ascending— Feet Per Mile	
			FIRST CLASS						FIRST CLASS					
			77	75	73	71			70	72	74	76		
			Leave Fri., Sun.	Leave Daily	Leave Daily	Leave Daily			Arrive Daily	Arrive Daily	Arrive Fri., Sun.	Arrive Daily		
Y	Yard	31.1					NATIONAL CITY YL	273.1						
C-R-T		10.5	PM	PM	PM	AM	22ND STREET YL	269.3	AM	PM	PM	PM		26.4
Y	Yard	52.8	8.30	4.30	1.00	7.00	SAN DIEGO YL	267.5	10.35	1.05	7.05	10.30		0.0
B		66.5	8.37	4.37	1.07	7.07	OLD TOWN YL	264.2	10.20	12.50	6.50	10.15		31.0
B		118.5					ELVIRA	267.9						51.7
B-Y		0.0					MIRAMAR	263.0						0.0
B	4877	54.2	9.00	5.00	1.30	7.30	SORRENTO	249.1						116.2
Y		52.8					DEL MAR	244.0	9.59	12.29	6.29	9.54		58.1
B		63.4					ENCINITAS	238.1						63.4
B	5333	69.7					PONTO	233.8						63.4
B-Y		15.8					ESCONDIDO JCT.	227.2						64.4
C-R	6096	64.4	9.21	5.21	1.51	7.51	OCEANSIDE	226.2	9.39	12.09	6.09	9.34		7.4
B-Y	4569	70.8					FALLBROOK JCT.	224.1		PM				63.5
B	4927	29.6					SAN ONOFRE	209.2						69.0
B		26.4	9.42	5.42	2.12	8.12	SAN CLEMENTE	204.8	9.19	11.49	5.49	9.14		58.1
B	4956	60.5					SERRA	199.8						28.5
B		65.5					SAN JUAN CAPISTRANO	197.2						0.0
B	4972	67.3					GALIVAN	192.6						0.0
B		0.0					EL TORO	188.1						73.9
B	5982	12.0					VALENCIA	182.9						70.2
B	4664	38.5					IRVINE	178.5						63.4
O	6048	30.6	10.12	6.12	2.42	8.42	SANTA ANA	176.5	8.51	11.21	5.21	8.46		0.0
Y	6250	29.6					ORANGE	172.6						14.3
C	3044	22.7					S. P. Crossing ANAHEIM	167.8						39.2
C-R			10.30 PM	6.30 PM	3.00 PM	9.00 AM	FULLERTON	166.0	8.35 AM	11.05 AM	5.05 PM	8.30 PM		19.0
			Arrive Fri., Sun.	Arrive Daily	Arrive Daily	Arrive Daily	(107.7)		Leave Daily	Leave Daily	Leave Fri., Sun.	Leave Daily		
		(51.0)	(51.0)	(51.0)	(51.0) Average speed per hour,			(51.0)	(51.0)	(51.0)	(51.0)		

Trains must get clearance card before leaving San Diego during hours office open.

Rule 85: Exchanging train orders, signals and numbers will not be required between Old Town and Fullerton.

Rule D-151: Between Old Town and crossover at west end of 22nd Street freight yard M.P. 268.7 trains will keep to left.

Rule 251 in effect between Old Town and San Diego.

Rule 261 (TCS) in effect at following locations:
Main tracks Old Town to Fullerton.
On sidings Ponto and Orange.

Rule 93: Yard limits located:
Old Town to and including National City.

Rule 93(A) in effect:
At San Diego passenger yard between crossover, Ash St. and Broadway.

TRACK SIDE WARNING DEVICES

Location	Type	Signals Affected
M.P. 197.9	Highwater	Signals 1981 and Controlled Eastward signal east end of San Juan Capistrano

When train is stopped account red indication at above signals, track and bridge must be inspected before proceeding.

12 LOS ANGELES DIVISION

FOURTH, OLIVE AND ELSINORE DISTRICTS

MAXIMUM AUTHORIZED DISTRICT SPEED FOR TRAINS

Fourth District LOCATION	M.P.H. Psgr. and Light Frt.	LOCATION	M.P.H. Psgr. and Light Frt.
National City to Sorrento	79 60	Curve M.P. 241.3 to 241.1	85 60
Sorrento to Santa Ana	90 60	2 Curves M.P. 239.2 to 238.5	85 60
South Main Track, M.P. 179.1 to M.P. 176.7	40 40	Curve M.P. 237.8 to 237.4	80 60
Santa Ana to Fullerton	79 60	Oceanside M.P. 227.0 to 225.5	30 30
Irvine and Miramar Spurs	15 15	3 Curves M.P. 224.7 to 223.8	70 60
San Diego M.P. 273.0 to 267.3	20 20	2 Curves M.P. 209.0 to 208.2	70 60
San Diego M.P. 267.3 to 264.1	30 30	12 Curves M.P. 207.7 to 201.2	75 60
3 Curves M.P. 262.7 to 261.2	70 60	Curve M.P. 200.3 to 199.9	45 45
2 Curves M.P. 260.3 to 259.9	50 50	Curve M.P. 199.4 to 199.1	65 60
Curve M.P. 259.1 to 258.6	60 60	3 Curves M.P. 198.6 to 197.9	35 35
3 Curves M.P. 258.5 to 257.9	40 40	2 Curves M.P. 197.4 to 197.0	60 60
6 Curves and Grade M.P. 257.8 to 253.7 Westward	65 60	Curve M.P. 195.9 to 195.8	75 60
6 Curves and Grade M.P. 253.7 to 257.8 Eastward	65 35	2 Curves M.P. 194.2 to 193.5	85 60
10 Curves M.P. 252.8 to 251.0	25 25	Santa Ana M.P. 176.1 to 175.3	40 40
2 Curves M.P. 250.9 to 250.6	40 40	2 Curves M.P. 175.0 to 174.4	60 60
2 Curves M.P. 250.5 to 250.0	55 55	7 Curves M.P. 173.8 to 172.0	40 40
Curve M.P. 247.7 to 247.6	85 60	Curve M.P. 170.3 to 169.2	75 60
Curve M.P. 245.8 to 245.5 Westward	60 60	Anaheim M.P. 168.1 to 167.7	40 40
Curve M.P. 244.6 to 244.4 Westward	75 60	Curve M.P. 166.9 to 166.6	75 60
3 Curves M.P. 244.4 to 245.8 Eastward	60 60	Curve M.P. 165.9 to 165.3	50 50
2 Curves and Plaza St. Crossing M.P. 244.3 to 241.8	50 50	Fullerton M.P. 165.2 to 164.7	30 30
		OLIVE DISTRICT	40 40
		ELSINORE DISTRICT	25 25
		13 Curves M.P. 1.7 to 4.0	15 15
		2 Curves M.P. 16.1 to 16.4	15 15
		Curve M.P. 17.7 to 17.9	15 15

SWITCHES—MAXIMUM AUTHORIZED SPEED

Maximum speed permitted through all yard and roundhouse turnouts and crossovers—10 MPH; all main track turnouts and crossovers—15 MPH; except for spring and power controlled switches and crossovers at following locations:

"I"—Interlocked Switch. "EE"—East End.
 "S"—Spring Switch. "WE"—West End.



Station	Type	Location	MPH
Fullerton	I	Two-track junction switch	50
Orange	I	WE siding	30
	I	EE siding (main track)	40
Irvine	I	EE two tracks—M.P. 179.1	40
Ponto	I	EE and WE of siding	40
Miramar	I	WE two main tracks—M.P. 252.9	30
	I	Crossover—M.P. 253.7	30
Elvira	I	EE two main tracks—M.P. 257.9	40
Old Town	I	Two-track junction switch	30

Siding switches Carlsbad, San Clemente and Irvine not power controlled but equipped with electric switch locks.

Station	Type	Location	MPH
Atwood	I	Junction switch	40
Orange	I	WE siding	30
	I	EE siding (main track)	40



Siding switches Olive not power controlled but are equipped with electric switch locks.

OLIVE DISTRICT

Communications Turn Tables and Wyes	Capacity of Sidings In Feet	Ruling Grade Descending—Feet Per Mile	WESTWARD	TIME TABLE	EASTWARD	Mile Post	Ruling Grade Ascending—Feet Per Mile
				NO. 24 June 10, 1973			
Y.B	Yard	42.2	TCS	ATWOOD	0.0	42.2	
B		42.2		OLIVE	2.4	42.2	
Y.C	3280			S. P. Crossing	3.4		
				ORANGE	5.8		
				(5.8)			

Rule 261 (TCS) in effect on main track between Atwood and Orange.

ELSINORE DISTRICT

Communications Turn Tables and Wyes	Capacity of Sidings In Feet	Ruling Grade Ascending—Feet Per Mile	WESTWARD	TIME TABLE	EASTWARD	Mile Post	Ruling Grade Descending—Feet Per Mile
				NO. 24 June 10, 1973			
B	847	147.8	TCS	ELSINORE	21.9	182.0	
B	1013	50.7		ALBERHILL	16.3	89.8	
	1498	0.0		ARCILLA	8.5	68.6	
B-Y	Yard			S. P. Crossing	0.0		
				PORPHYRY			
				(21.9)			

No switch lights on Elsinore District. Normal position of junction switches: Yard limits Elsinore to Porphyry, inclusive. Porphyry for Third District siding.

RAILROAD CROSSING AT GRADE

Olive District		
Location	Track Governed	Rule
Olive	1.7 west S. P. Crossing	TCS
Elsinore District		
PORPHYRY	S. P. Crossing	98-A, 98-B.

STATIONS OR TRACKS NOT SHOWN IN SCHEDULE

Elsinore District			
Location	Mile Post	Capacity in Feet	Switch Connection
Mining Spur	3.2	3425	East and West
South Corona	5.0		
Weisel	6.2	1820	East

LENGTH OF STEMS OF WYES

Location	Feet
Atwood	600
Orange	Main track

HARBOR DISTRICT

Capacity of Sidings In Feet	Ruling Grade Ascending— Feet Per Mile	WESTWARD	TIME TABLE	EASTWARD	Mile Post	Ruling Grade Ascending— Feet Per Mile	Communications Turn Tables and Wyes
		↑	NO. 24 June 10, 1973	↓			
			STATIONS				
			LONG BEACH				
			2.5 S. P. Crossing West Thenard				
Yard			1.1 Pier A Yard				O
Yard			2.0 WILMINGTON		28.0		B
Yard			1.4 WATSON		26.6	62.8	B-Y
Yard	79.2		3.3 IRONSIDES		23.3	0.0	
Yard	24.3		1.6 TORRANCE		21.7	26.4	O
Yard	10.9		1.6 ALCOA		20.1	58.4	B
Yard	52.3		3.5 LAWDALE		16.6	51.1	
Yard	52.6		1.8 EL SEGUNDO S. P. Crossing		14.8	4.0	Y
5100	11.6		1.2 LAIRPORT		13.6	13.7	B
Yard	26.4		3.7 INGLEWOOD		9.9	52.8	
Yard	52.8		1.9 HYDE PARK		8.0	57.6	
Yard	0.0		0.7 VAN NESS		7.3	0.0	
Yard	10.5		1.3 WILDASIN		6.0	0.0	
Yard	18.5		2.5 WINGFOOT S. P. Crossing		3.5	0.0	B
Yard	21.1		2.0 S. P. Crossing MALABAR		1.5	0.0	
Yard	52.8		1.5 REDONDO JCT.		0.0	0.0	R-Y
			(28.0)				

MAXIMUM AUTHORIZED DISTRICT SPEED FOR TRAINS

LOCATION	Pgr. and Light	MPH	Fr.
HARBOR DIST.	30		30
Torrance Oil Spur	15		15
Alcoa Spur	15		15
M.P. 0.0 to St. Crossing M.P. 1.6	12		12
M.P. 1.6 to St. Crossing M.P. 8.3	15		15
Curve M.P. 8.8 to M.P. 10.1	15		15
St. Crossing M.P. 13.1	15		15
M.P. 20.0 to 23.0 Torrance	15		15
St. Crossing M.P. 25.9	10		10
St. Crossing M.P. 26.0	10		10
St. Crossing M.P. 26.1	10		10
St. Crossing M.P. 27.9	15		15
Between Watson and Pier A Yard	10		10
REDONDO DIST.	15		15

Trains and engines will reduce speed to 5 MPH 250 feet in advance and until engine occupies the following crossings:
 Rosecrans Avenue—M.P. 15.5
 Pacific Avenue—M.P. 16.2
 Fifteenth Street—M.P. 16.8
 Manhattan Beach Boulevard—M.P. 17.1
 Pier Avenue—M.P. 18.7

SWITCHES—MAXIMUM AUTHORIZED SPEED

Maximum speed permitted through all yard turnouts and crossovers—10 MPH;
 All main track turnouts and crossovers—15 MPH.
 Movements over Harbor Belt Line and Southern Pacific joint tracks between McFarland Ave. and Pier A Yard and between Avalon Blvd. and San Pedro will be made as prescribed by Rule 93.
 Normal position of switches of crossover located 100 feet west of Avalon Blvd. is lined for crossover movement.

Authority must be secured from Harbor Belt Line Yardmaster before making movements in either direction between Watson and Pier A Yard, from Watson to San Pedro and from Sixth Street Yard, San Pedro to Watson.

Movements over Southern Pacific joint track between West Thenard and Long Beach will be made under provision of Rule 93 and must be authorized by Southern Pacific Trainmasters Office, Long Beach.

Spring point derail located at 2414 feet west of M.P. 27, west end Watson Yard. Normal position set to derail for westward movements.

Light indicators are located between Malabar and Wingfoot:

For westward movement at M.P. 1.7 with 1000 foot approach circuit.

For eastward movement at M.P. 2.3 with 1000 foot approach circuit.

Indicators are lighted continuously displaying Red aspect, except when engines or cars foul approach circuit, indicator will display a Green aspect if limits are unoccupied.

If indicator does not change to a Green aspect when engines or cars foul approach circuit, Stop must be made and movement must be protected.

When clearing the main track within the above limits, main track switch must not be returned to normal until engine and cars are clear of main track. Main track must not again be fouled without providing proper protection and in addition main track switch must be opened and wait five minutes.

Yard limits Pier A to Redondo Jct., inclusive.

No switch lights on Harbor District.

LENGTH OF STEMS OF WYES

Location	Feet
Redondo Junction	Main Track
El Segundo	Main Track
Watson	3800

Normal position of junction switches
 El Segundo for Harbor District.

REDONDO DISTRICT

Capacity of Sidings In Feet	Ruling Grade Ascending— Feet Per Mile	WESTWARD	TIME TABLE	EASTWARD	Mile Post	Ruling Grade Ascending— Feet Per Mile	Communications Turn Tables and Wyes
		↓	NO. 24 June 10, 1973	↑			
			STATIONS				
Yard			REDONDO BEACH		20.2		
Yard	42.2		1.5 HERMOSA BEACH		18.7	0.0	
Yard	42.2		1.7 MANHATTAN BEACH		17.0	0.0	
Yard	47.5		2.2 EL SEGUNDO		14.8	52.8	Y
			(5.4)				

No switch lights on Redondo District.
 Yard limits Redondo Beach to El Segundo, inclusive.

STATIONS OR TRACKS NOT SHOWN IN SCHEDULE

Location	Mile Post	Capacity in Feet	Switch Connection
Nadeau	2.5	325	East

RAILROAD CROSSINGS AT GRADE AND INTERLOCKINGS

Location	Tracks Governed	Rules
Redondo Junction	U. P. Crossing.	See Redondo Junction, Third District. Automatic interlocking, 321(D), 10 MPH.
Nadeau	S. P. Crossing.	
Nadeau (0.3 Mi. East)	S. P. Crossing.	Automatic interlocking, 321(D), 15 MPH.
El Segundo (0.2 Mi. West)	S. P. Crossing.	98—10 MPH while head end is passing over crossing.
West Thenard	S. P. Crossing.	Automatic interlocking, 321(D)

SAN JACINTO DISTRICT

Communications Turn Tables and Wyes	Capacity of Sidings In Feet	Ruling Grade Ascending— Feet Per Mile	WESTWARD	TIME TABLE	EASTWARD	Mile Post	Ruling Grade Ascending— Feet Per Mile
			↓	NO. 24 June 10, 1973	↑		
	1018	116.2		HIGHGROVE S. P. Crossing 2.5		0.0	0.0
	1555	116.2		LEMONA 4.5		2.7	0.0
C	2046	21.3		BOX SPRINGS 2.3		7.2	17.6
		21.3		MARCH FIELD 1.1		9.6	17.6
Y	1105	0.0		ALESSANDRO 2.9		10.6	47.5
		0.0		VAL VERDE 4.7		13.6	28.1
B-Y	Yard	21.6		PERRIS 3.8		18.3	63.4
		49.3		ETHANAC 6.3		22.7	42.2
B	Yard	52.8		WINCHESTER 7.1		28.9	0.0
		6.3		HEMET 2.3		36.0	63.4
C-Y	Yard			SAN JACINTO		38.3	
				(37.5)			

No switch lights on San Jacinto District. Yard limits Highgrove to San Jacinto, inclusive.

ESCONDIDO DISTRICT

Communications Turn Tables and Wyes	Capacity of Sidings In Feet	Ruling Grade Ascending— Feet Per Mile	WESTWARD	TIME TABLE	EASTWARD	Mile Post	Ruling Grade Ascending— Feet Per Mile
			↓	NO. 24 June 10, 1973	↑		
	1376	83.4		ESCONDIDO 4.9		21.1	95.0
	866	116.2		SAN MARCOS 7.0		16.2	116.2
B	1811	116.2		VISTA 9.9		9.2	116.2
B-Y				ESCONDIDO JCT.		0.0	
				(21.8)			

No switch lights on Escondido District. Yard limits Escondido to Escondido Jct., inclusive.

FALLBROOK DISTRICT

Communications Turn Tables and Wyes	Capacity of Sidings In Feet	Ruling Grade Ascending— Feet Per Mile	WESTWARD	TIME TABLE	EASTWARD	Mile Post	Ruling Grade Ascending— Feet Per Mile
			↓	NO. 24 June 10, 1973	↑		
	2077	66.0		FALLBROOK JCT. 6.0		0.0	62.7
		26.4		CHAFFO 2.4		5.9	0.0
B	2271	132.0		JOFEKAN 6.7		8.4	79.2
	357	105.6		U.S.M.C. Crossing DE LUZ 1.8		15.1	0.0
C				FALLBROOK		16.9	
				(16.9)			

No switch lights on Fallbrook District. Yard limits Fallbrook Jct. to Fallbrook, inclusive.

MAXIMUM AUTHORIZED DISTRICT SPEED FOR TRAINS

Location	MPH	
	Psg. and Light	Frts.
SAN JACINTO DISTRICT:		
Highgrove to Box Springs	20	20
Box Springs to Ethanac	40	40
Ethanac to M.P. 25.0	25	25
M.P. 25.0 to 35.7	15	15
M.P. 35.7 to San Jacinto	10	10
Curve M.P. 18 to 19.2	15	15
ESCONDIDO DISTRICT		
Hill St. M.P. 0.3	20	20
12 Curves and track M.P. 0.3 to 6.0	10	10
	15	15
FALLBROOK DIST.		
	20	20

SWITCHES—MAXIMUM AUTHORIZED SPEED

Maximum speed permitted through all yard turnouts and crossovers—10 MPH; all main track turnouts and crossovers—15 MPH.

RAILROAD CROSSING AT GRADE AND INTERLOCKING

Location	San Jacinto District	
	Tracks Governed	Rule
Highgrove 1.5 Mi. West	S. P. Crossing	Automatic interlocking Rule 321-D.
Fallbrook District		
JOFEKAN	U.S.M.C. Crossing	98-A, 98-B.

STATION OR TRACKS NOT SHOWN IN SCHEDULE

San Jacinto District			
Location	Mile Post	Capacity in Feet	Switch Connection
Lily Cup	0.6	545	East and West
Box Springs Quarry	6.1	2305	East and West
Mayer Farms	15.9	920	East and West
Granite Spur	14.5	Lgh. 0.9 m.	Wye
Ellis	19.9	800	East
Menifee	25.0		
Egan	33.1	760	East and West
Escondido District			
Talica	3.7	1347	East and West
Fallbrook District			
Ranch House	7.6		
Marine Base Spur	10.5	615	East and West

LENGTHS OF STEMS OF WYES

Location	Feet
March Field	March Field Spur
Val Verde	Granite Spur
Perris	1678
San Jacinto	640

Normal position of junction switches:
Highgrove for Third District.
Fallbrook Jct. for Fourth District siding.

CADIZ DISTRICT

Communications Turn Tables and Wyes	Capacity of Sidings In Feet	Ruling Grade Ascending—Feet Per Mile	WESTWARD	TIME TABLE NO. 24 June 10, 1973	EASTWARD	Mile Post	Ruling Grade Ascending—Feet Per Mile
			↙		↗		
C	Yard			STATIONS			
				PARKER YL		105.8	
B		31.7		8.3			29.6
B	880	30.6		CALZONA		114.1	0.0
		30.6		5.9			
B	2471			VIDAL		120.0	21.1
				20.4			
B	1967	0.0		RICE YL		140.4	
		0.0		3.6			25.3
B	2846			FREDA YL		144.0	30.6
		29.6		7.0			
B	4949			SABLON		151.0	31.7
		29.6		18.2			
B-Y	3500			FISEEL		169.2	31.7
				21.3			
				CADIZ YL		180.5	
				(84.7)			

Trains must get clearance card before leaving Parker.
Booth phones at M.P. 173.6 and M.P. 179.6.

Yard limits located at:

Cadiz (Cadiz District only)
Milligan

Freda to Rice inclusive.
Earp to Parker inclusive.

RIPLEY DISTRICT

Communications Turn Tables and Wyes	Capacity of Sidings In Feet	Ruling Grade Ascending—Feet Per Mile	WESTWARD	TIME TABLE NO. 24 June 10, 1973	EASTWARD	Mile Post	Ruling Grade Ascending—Feet Per Mile
			↙		↗		
C-R-Y	Yard			STATIONS			
				RIPLEY		49.4	42.8
	526	83.4		7.4			
		65.0		BLYTHER		42.0	10.6
B-Y	2741			25.5			
				STYX		16.5	83.4
				16.5			
				RICE		0.0	
				(49.4)			

No switch lights on Ripley District.

Yard limits Ripley to Rice, inclusive.

LUCERNE VALLEY DISTRICT

Communications Turn Tables and Wyes	Capacity of Sidings In Feet	Ruling Grade Ascending—Feet Per Mile	WESTWARD	TIME TABLE NO. 24 June 10, 1973	EASTWARD	Mile Post	Ruling Grade Ascending—Feet Per Mile
			↙		↗		
C	2900			STATIONS			
	700	0.0		CUSHENBURY		29.2	
	760	0.0		3.1			105.6
	122	75.0		SPUR 5		26.1	105.6
	114	0.0		10.5			
B		116.2		BASS		15.6	75.0
				4.3			
				SPUR 2		11.3	75.0
				4.3			
				SPUR 1		7.0	75.0
				7.0			
				HESPERIA		0.0	
				(29.2)			

No switch lights on Lucerne Valley District.

Yard limits Cushenbury to Hesperia, inclusive.

MAXIMUM AUTHORIZED DISTRICT SPEED FOR TRAINS

Location	MPH	
	Psgr. and Light	Frt.
CADIZ DIST.		
CADIZ DIST.	40	40
M.P. 154 to 158	30	30
RIPLEY DISTRICT		
Rice to Blythe	40	40
Blythe to Ripley	20	20
Riverview Farms Spur	15	15
3 Curves M.P. 14.6 to 15.2	25	25
4 Curves M.P. 15.6 to 16.4	20	20
4 Curves M.P. 16.7 to 17.7	30	30
5 Curves M.P. 34.6 to 36.4	30	30
LUCERNE VALLEY DISTRICT		
Hesperia to M.P. 25.2	35	35
M.P. 25.2 to 29.2	20	20

SWITCHES—MAXIMUM AUTHORIZED SPEED

Maximum speed permitted through all yard turnouts and crossovers—10 MPH; all main track turnouts and crossovers—15 MPH.

STATIONS OR TRACKS NOT SHOWN IN SCHEDULE

Cadiz District			
Location	Mile Post	Capacity In Feet	Switch Connection
Earp	107.3	534	West
Grommet	131.6	500	East
Saltmarsh	155.8		
Milligan	164.0		
Metropolitan Water			
Dist.	163.9	1711	East and West
Pacific Salt Co.	163.7	212	East and West
Standard Chemical			
Co.	162.6	988	East and West
Chubbuck	172.7	574	West
Ripley District			
Midland	17.8	308	West
Cox	20.4	1100	East
Inca	22.6		West
Mesaville	33.0		West
Riverview Farms Spur .	36.3	Lgh. 3.9 m.	West
Miller Farms	44.7		East
Lucerne Valley District			
La Habra Product			
Inc.	23.5	884	East and West
Chas. Pfizer and			
Co. Inc.	26.2	1300	East and West

Normal position of junction switches

Rice for Cadiz District.

Cadiz for Needles District siding.

Hesperia for First District siding.

1. Rule S-72: Except as otherwise provided, all eastward trains are superior to westward trains of the same class.

2. Rule 2: Standard clocks are located at Needles, Parker, Blythe, Barstow (yard office and roundhouse), San Bernardino (roundhouse, Rialto Ave. and "A" yard office), Los Angeles (Union Station, Redondo Jct. and Hobart yard offices), Torrance, Fullerton, Oceanside, San Diego (yard office and Division Foreman's office).

Rule 3: Crews of Union Pacific and Southern Pacific trains, complying with their Companies' time regulations, may proceed over joint tracks.

Union Pacific trains using joint tracks between Riverside Jct. and Daggett, and Southern Pacific trains between Riverside Jct. and May will be governed by A.T.&S.F. time table and Rules, Operating Department.

3. Within traffic control system limits, where maximum speed exceeds 20 MPH a train or engine must not clear the main track through a hand-thrown switch, not electrically locked, for the purpose of meeting, or passing or being passed by another train or engine.

4. Rule 80: Bulletin books are located at Needles, Parker, Blythe, Barstow, Victorville, San Bernardino, Kaiser, Corona, Fullerton, Pico Rivera, Union Station, Redondo Junction, Hobart, Torrance, Watson, Santa Ana, Oceanside, San Diego, and 22nd Street.

5. Rule 104 (E) is amended: All sidings having hand-thrown derrails will have derail locked off rail, except when engines or cars are left unattended on siding.

6. Where the letter "P" appears on the mast of a signal, with arm in horizontal position or a red light displayed, the name of such signal is a "Permissive Signal" and its indication is "Proceed at Restricted Speed."

When so displayed trains may without stopping, pass such signal at restricted speed and proceed at restricted speed to next governing signal.

7. On all districts where Rule 251 is in effect, trains having work to do or being delayed at any point other than ordinary station stops, must clear main track unless permission is received to occupy main track.

8. Rule 761: Following is a list of structures:
Barstow, viaduct over passenger yard tracks and house tracks 1 to 4, inclusive;

San Bernardino, Mt. Vernon Ave. viaduct over roundhouse leads;
Colton, East end track E Griffin Wheel Co.;
First Street, viaduct over old passenger tracks; and
Los Angeles, Union Station, train sheds.

9. Rule 93(A): Between designated points specified in Time Table, trains and engines must move at restricted speed and main tracks may be used in either direction not protecting against other trains or engines and are not required to clear first class trains or superior trains but must give way to them as soon as possible upon their approach.

SPECIAL RULES

SPEED REGULATIONS

10. Freight trains averaging 85 tons or more per car, or total train weight is 7000 tons or more, speed must not exceed 45 M.P.H.

11. In freight and mixed service with dynamic brake not in use maximum speed on descending grades as follows:

1.0 to 1.5% (52.8 to 79.2 feet per mile)	30 MPH
1.5 to 2.0% (79.2 to 105.6 feet per mile)	25 MPH
2.0% (105.6 feet per mile)	15 MPH

Where street or highway crossings are shown, speed limit applies only while head end of train is passing.

Derricks, cranes, pile drivers, spreaders* and similar machinery moving on their own running gear must not be moved in trains except on authority of Trainmaster, and trains handling such equipment must not exceed speeds indicated below:

District	Wrecking Derricks M.P.H.	Pile Drivers AT-199454 AT-199455 AT-199458 AT-199720 M.P.H.	Other Machines Including Derrick AT-199775 M.P.H.
Needles, Cadiz, First, Second, Third and Fourth Districts	40	45	30
Any point on all other Districts	15	15	15

*Trains handling spreaders with wings folded and fastened must not exceed 45 M.P.H.

Trains handling scale test cars: AT 199913, AT 199914, or AT 199915 must not exceed 50 M.P.H.

Pile drivers must be handled in train next to engine.

12. MAXIMUM SPEED OF LOCOMOTIVES

Diesels	Forward MPH	Light forward MPH	Backing or when not controlled from leading unit	Dead in train
300LABC thru 314LABC, 315AB thru 321AB	90	90	45	90
5920-5948	79	79	45	79
16C-47A, 200-289, 325-344, 2500-2899, 2900-2951, 3100-3174, 3200-3284, 3300-3460, 3500-3560, 4000-4019, 4500-4579, 5000-5019, 5500-5589, 5590-5614, 5615-5661, 5900-5919, 6300-6348, 6600-6615, 7500-7519, 7900-7909, 8000-8005, 8500-8524, 8700-8714, 9122-9148, 9800-9849	70	70	45	70
500-564, 652-653, 1500-1537, 2258-2298, 2323-2399, 2404-2441, 2450	45	45	45	45
Diesels without dynamic brakes in use				
Ash Hill-Bagdad		24		
Goffs-Needles		24		
Summit to Victorville		30		
Summit-Cajon		15		
Cajon-San Bernardino		20		
Diesels with dynamic brakes in use				
Ash Hill-Siberia				
Summit-San Bernardino				
		Passenger Train Speeds		

13. Rule 817: Equipment listed below must not be moved through water above top of rail greater than the depths and not in excess of the speeds shown:

MAXIMUM DEPTH OF WATER THROUGH WHICH EQUIPMENT MAY BE OPERATED AND MAXIMUM SPEEDS IN SUCH OPERATION

Types of Equipment	Maximum depth above top of rail (inches)	Maximum speed in tow (MPH)	Maximum speed under own power (MPH)
Diesel Locomotives:			
All Classes	4	5	5
Passenger Cars:			
Roller Bearings	8	5	0
Friction Bearings	12	5	0

18 LOS ANGELES DIVISION

SYMBOL FREIGHT TRAIN SCHEDULE (For information only) LOS ANGELES DIVISION WESTWARD

	NEEDLES			BARSTOW			SAN BERNARDINO			LOS ANGELES	
	Arrive	Leave		Arrive	Leave		Arrive	Leave		Arrive	
109	11:15P	11:15P	2	4:30A	5:00A	3					
118	7:20A	7:20A	3	12:05P	12:35P	3	4:20P	4:40P	3	9:00P	3
119	3:30A	3:30A	3	7:30A	8:00A	3					
129	3:30A	3:30A	3	7:30A	8:00A	3					
198	4:00P	4:00P	2	7:00P	7:05P	2	9:15P	9:15P	2	11:00P	2
308	12:45P	12:45P	2	4:40P	5:10P	2	8:15P	8:15P	2	11:00P	2
309	11:15P	11:15P	2	4:30A	5:00A	3					
318	2:15A	2:15A	3	8:05A	8:35A	3	12:40P	1:00P	3	7:00P	3
328	7:20A	7:20A	2	12:05P	12:35P	2	4:20P	4:40P	2	9:00P	2
329	3:30A	3:30A	2	7:30A	8:00A	2					
368	7:20A	7:20A	2	12:05P	12:35P	2	4:20P	4:40P	2	9:00P	2
378	7:20A	7:20A	2	12:05P	12:35P	2	4:20P	4:40P	2	9:00P	2
379	3:30A	3:30A	2	7:30A	8:00A	2					
408	4:55A	5:00A	3	10:00A	11:00A	3	2:05P	2:25P	3	6:00P	3
508	4:30A	4:30A	3	9:10A	9:55A	3	2:00P	2:30P	3	7:00P	3
668	2:35P	2:35P	1	6:10P	6:30P	1	9:30P	9:30P	1	11:59P	1
678	5:20P	5:25P	1	9:30P	10:00P	1	1:00A	1:30A	2	4:00A	2
679	9:10P	9:10P	1	2:25A	2:55A	2					
709	9:10P	9:10P	1	2:25A	2:55A	2					
718	4:00P	4:30P	1	11:00P		1					
728	12:15A	12:15A	2	5:45A	8:45A	2	12:45P	1:15P	2	6:00P	2
779	9:10P	9:10P	1	2:25A	2:55A	1					
908				6:30P	7:30P	1	11:30P	12:30A	2	5:00A	2
968				8:30A	9:15A	3	12:45P	1:00P	3	4:00P	3

AVOID DAMAGE—SWITCH CUSTOMERS' CARS CAREFULLY

Damage to freight or car can be avoided by always keeping coupling speed within the safe range—NOT OVER 4 MILES PER HOUR—A BRISK WALK.

Handle freight carefully and keep our customers.

IT'S EVERYBODY'S JOB ON THE SANTA FE!

Attendants accompanying live-stock or other shipments, may be carried on the train handling shipments of which they are in charge, when provided proper transportation.

SURGEONS OF THE SANTA FE COAST LINES HOSPITAL ASSOCIATION

DR. CHARLES J. MONAHAN, CHIEF SURGEON
Los Angeles, Calif.

DR. A. L. KIEFER, ASSISTANT CHIEF SURGEON
Los Angeles, Calif.

DR. L. E. WALTER, ASSISTANT CHIEF SURGEON
Los Angeles, Calif.

R. W. WELLS, GENERAL WATCH INSPECTOR
Topeka, Kansas

For name and address of local surgeons and local watch inspector, refer to bulletin book.


SYMBOL FREIGHT TRAIN SCHEDULE (For information only)
LOS ANGELES DIVISION
EASTWARD

	LOS ANGELES		SAN BERNARDINO			BARSTOW			NEEDLES	
	Leave		Arrive	Leave		Arrive	Leave		Arrive	
801	9:00A	1	11:45A	12:15P	1	4:15P	4:45P	1	8:00P	1
803	6:30A	1	8:15A	8:45A	1	11:45A	12:15P	1	3:35P	1
804	8:00P	0	10:00P	10:30P	0	1:30A	2:00A	1	6:00A	1
805	5:00A	1	7:30A	8:00A	1	11:00A	11:30A	1	3:05P	1
809	6:00P	0	9:00P	9:45P	0	2:00A	3:00A	1		
813	9:00P	0	11:00P	11:30P	0	2:30A	3:00A	1	6:35A	1
816				11:00A	1	2:00P	2:30P	1	5:00P	1
843				10:30A	1	1:30P	2:00P	1	6:00P	1
863	9:00P	0	11:00P	11:30P	0	2:30A	3:00A	1	6:35A	1
869	4:00A	1	6:15A	7:00A	1	11:00A	11:45A	1		
891	9:30A	1	11:05A	11:05A	1	1:05P	1:10P	1	4:05P	1
901						5:15P	5:45P	1	8:55P	1
905						8:45P	9:15P	1	1:50A	2
917						6:00A	6:45A	1	11:15P	1
943						4:30P	5:00P	1	9:05P	1

788 887	YK Coal Coal Mtys	708	Lv. Parker Ar. Barstow	5:30A 12:01P	3254	Lv. Los Angeles Ar. San Diego	7:30P 12:40A
		807	Lv. Barstow Ar. Parker	9:00A 3:30P	3251	Lv. San Bernardino Ar. San Diego	4:00P 9:00P
					3252	Lv. San Diego Ar. San Bernardino	9:00P 2:30A

SPEED TABLE—FOR INFORMATION ONLY

Time Per Mile		Miles Per Hour	Time Per Mile		Miles Per Hour	Time Per Mile		Miles Per Hour
Min.	Sec.		Min.	Sec.		Min.	Sec.	
..	36	100	..	58	62.1	1	40	36.0
..	37	97.3	..	59	61.0	1	42	35.3
..	38	94.7	1	..	60.0	1	44	34.6
..	39	92.3	1	02	58.0	1	46	34.0
..	40	90.0	1	04	56.2	1	48	33.3
..	41	87.8	1	06	54.5	1	50	32.7
..	42	85.7	1	08	52.9	1	52	32.1
..	43	83.7	1	10	51.4	1	54	31.6
..	44	81.8	1	12	50.0	1	56	31.0
..	45	80.0	1	14	48.6	1	58	30.5
..	46	78.3	1	16	47.4	2	..	30.0
..	47	76.6	1	18	46.1	2	05	28.8
..	48	75.0	1	20	45.0	2	10	27.7
..	49	73.5	1	22	43.9	2	15	26.7
..	50	72.0	1	24	42.9	2	30	24.0
..	51	70.6	1	26	41.9	2	45	21.8
..	52	69.2	1	28	40.9	3	..	20.0
..	53	67.9	1	30	40.0	3	30	17.1
..	54	66.6	1	32	39.1	4	..	15.0
..	55	65.5	1	34	38.3	5	..	12.0
..	56	64.2	1	36	37.5	6	..	10.0
..	57	63.2	1	38	36.8	12	..	5.0

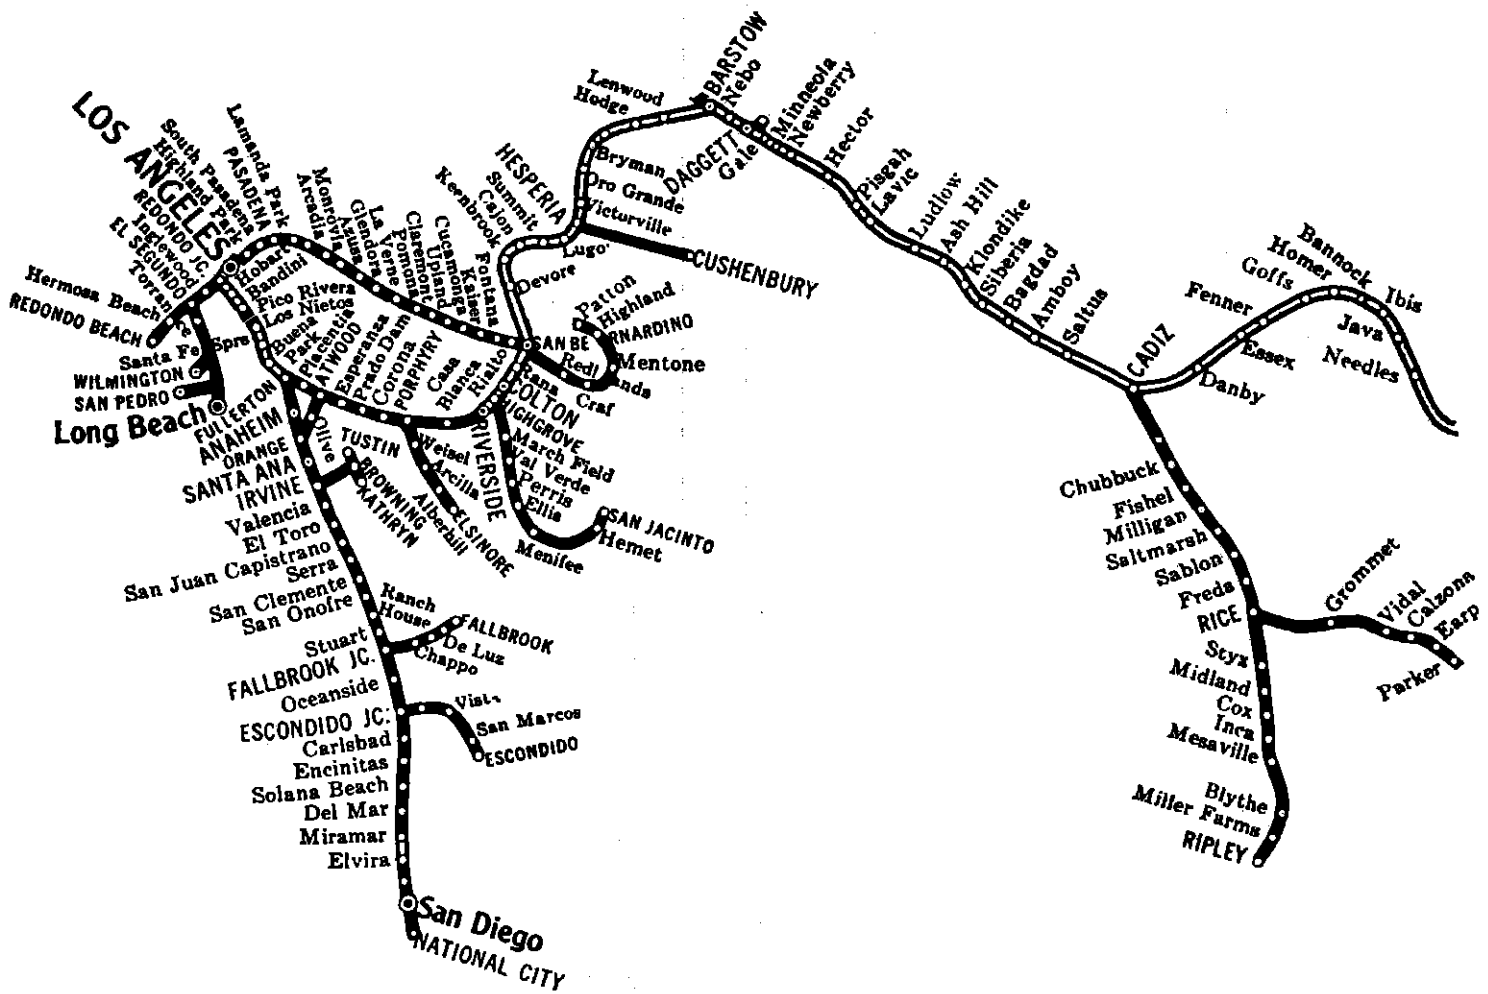

**LOS ANGELES AND
LOS ANGELES TERMINAL DIVISION**