

SOUTHERN PACIFIC COMPANY

(PACIFIC LINES)

TIME TABLE FOR THE SAN JOAQUIN DIVISION

157



To Take Effect Sunday, December 13, 1936, at 12:01 A. M.

TO FEB. 13, 1938.

PACIFIC STANDARD TIME (120th MERIDIAN)

For the government and information of employes only.

A. T. MERCIER,
General Manager.

W. B. KIRKLAND,
Superintendent of Transportation.

L. U. MORRIS,
Assistant General Manager.

J. D. BRENNAN,
Superintendent.

FRESNO SUBDIVISION

EASTWARD

WESTWARD

Capacity of Sidings in Car Lengths	EASTWARD								Distance from San Francisco	Time Table No. 157 December 13, 1936	Distance from Bakersfield	WESTWARD						
	SECOND CLASS		FIRST CLASS									FIRST CLASS						
	400 Freight	26 Owl	56 Tehachapi	346 Motor	52 San Joaquin	12 Santa Fe Motor	58 Sequoia	60 West Coast				25 Owl	59 West Coast	55 Tehachapi	345 Motor	5 Santa Fe Motor	51 San Joaquin	57 Sequoia
Leave Daily	Leave Daily	Leave Daily	Leave Daily	Leave Daily	Leave Daily	Leave Daily	Leave Daily	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily				
WOTYP Yard									201.8	FRESNO YARD 1.4	111.1							
BKWOTYP Yard	4.20 AM	11.45 PM	8.00 PM		1.50 PM		6.50 AM	12.30 AM	203.2	F. T. Co. Crossing 2.3	109.7							
I P	4.30	11.55 PM	8.10		1.59		7.00	12.40	205.5	TO-R FRESNO 3.6	107.4	s 2.33 AM	4.10 AM	7.30 AM		s 3.55 PM s 10.00 PM		
No Siding P			f				s		209.1	TO CALWA TOWER A. T. & S. F. Crossing 1.3	103.8	2.23	4.00	7.20		3.45 9.48		
118 P	4.40		f 8.20				s 7.08		210.4	MALAGA 4.7	102.5			f				
125 Yard WP	4.50	f 12.11 AM	s 8.30		f 2.12		s 7.20	12.53	215.1	TO FOWLER 5.6	97.8			s 7.08		3.36 f 9.39		
100 Yard WP	5.00	12.18	s 8.40		f 2.18		s 7.30	12.59	220.7	TO SELMA 4.9	92.2	f 2.08	3.44	s 6.58		f 3.27 s 9.31		
106 P	5.09	12.25	f 8.48		2.24		s 7.37		225.6	TO KINGSBURG 5.7	87.3	2.01	3.36	s 6.48		f 3.17 s 9.22		
60 P		12.28	8.51				7.40		231.3	TRAVER 2.4	81.6		3.29	f 6.38		3.09 9.13		
94 KWOTYP Yard	5.21	12.35	s 9.00		s 2.41		s 7.47 AM	1.16	233.7	CROSS 5.4	79.2		3.26	6.35		3.06 9.10		
59 P	5.31	12.43	f 9.13		2.48			1.24	239.1	TO-R GOSHEN JCT. 6.5	73.8	1.44	3.19	s 6.25		s 2.56 9.00 PM		
									245.6	TAGUS 4.1	67.3	1.36	3.11	6.02		2.48		
									249.7	TO TULARE TOWER A. T. & S. F. Crossing 0.3	63.2							
89 WP	5.40	s 12.51	s 9.20		s 3.00			1.30	250.0	TULARE 5.8	62.9	s 1.30	3.03	s 5.40		s 2.43		
59 P	5.58	12.59	9.40		3.07			1.39	255.8	OCTOL 4.6	57.1	1.18		5.18		2.33		
83 WP	6.05	1.11	s 9.55		f 3.13			1.45	260.4	TO TIPTON 6.4	52.5	1.11	2.50	s 5.03		2.28		
94 P	6.15	1.20	s 10.05		3.20			1.52	266.8	TO PIXLEY 5.6	46.1	1.04	2.43	s 4.52		2.21		
83 P			f 10.15					1.59	272.4	TO EARLIMART 4.1	40.5	12.57		s 4.41				
59 P	6.30	1.31	10.21						276.5	RADNOR 4.2	36.4		2.32	4.31				
82 WP	6.37	1.37	s 10.30		s 3.38			2.09	280.7	TO DELANO 6.3	32.2	f 12.47		s 4.25		s 2.06		
59 P	6.47	1.44	s 10.40		3.45			2.16	287.0	TO Mc FARLAND 5.6	25.9	12.40	2.16	s 4.12		1.58		
79 KWTP	7.00	1.51	f 10.49	10.32 PM	3.52	9.37 AM		2.26	292.6	TO-R FAMOSO 3.3	20.3	12.34	2.09	f 4.00	s 7.00 AM s 12.21 PM	1.52		
59 P	7.05		10.53	f 10.38					295.9	SLATER 4.6	17.0							
82 P	7.12	2.00	10.59	f 10.44	4.02	9.47		2.35	300.5	LERDO 2.5	12.4	12.25	2.00	3.50	f 6.51 12.12	1.43		
90 P	7.16	2.04	11.02	10.47		9.51		2.38	303.0	PROSPERO 2.8	9.9	12.22	1.57	3.47	6.48 12.09			
59 P	7.21		11.06	f 10.51		9.55			305.8	SACO 2.8	7.1			6.44		1.37		
80 P	7.26	2.11	11.10	10.55	4.12	s 10.01 AM		2.45	308.6	R OIL JCT. 2.5	4.3	12.15	1.50	3.40	f 6.40 12.02 PM	1.33		
No Siding P									311.1	NOME 1.8	1.8							
Yard BKWOTYP	7.40 AM	s 2.21 AM	s 11.20 PM	s 11.05 PM	s 4.22 PM			s 2.55 AM	312.9	TO-R BAKERSFIELD (111.1)	0.0	12.05 AM	1.40 AM	3.30 AM	6.30 AM	1.23 PM		
	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily				Leave Daily	Leave Daily	Leave Daily	Leave Daily	Leave Daily	Leave Daily	
	(3.20) 32.22	(2.36) 41.30	(3.20) 32.22	(0.33) 36.90	(2.32) 42.38	(0.24) 35.83	(0.57) 35.36	(2.25) 44.44		Time over District.....		(2.28) 43.54	(2.30) 42.96	(4.00) 26.85	(0.30) 40.60	(0.19) 50.52	(2.32) 42.38	(1.00) 33.60
										Average Speed per Hour.....								

Schedule time and train orders for eastward trains at Calwa Tower apply at end of double track, 360 feet west of the tower. Rule S-72 Exception; No. 56 is superior to No. 57.
 Schedule time and train orders for eastward trains at Famoso apply at junction switch of Porterville Line.
 Schedule time and train orders for trains at Oil Jct. apply at crossover switch just west of Signal 3086.

ADDITIONAL STATIONS:

Muscato	200.2
Calwa	208.3
Winedale (Spur)	222.8
Midvalley (Spur)	243.4
Burling (Spur)	251.5
Alfac (Spur)	262.3
Quail (Spur)	263.7
Stone (Spur)	275.8
Dow (Spur)	298.6

ADDITIONAL FLAG STOPS TO RECEIVE OR DISCHARGE REVENUE PASSENGERS					
Train	At	Receive or Discharge	To (or beyond)	From (or beyond)	Frequency
60	Selma	Discharge		Stockton	Daily
60	Tulare	Discharge		Stockton	Daily
60	Delano	Discharge		Stockton	Daily
56	Any Station	Discharge		Delano	Daily
55	Any Station	Discharge		Los Angeles	Daily
52	Any Station	Discharge		Ogden	Daily
26	Delano	Receive and Discharge	Los Angeles	Tracy	Daily

EASTWARD

FRESNO SUBDIVISION

WESTWARD

Capacity of Sidings in Car Lengths	FIRST CLASS				Distance from San Francisco	Time Table No. 157 December 13, 1936	Distance from Famoso	FIRST CLASS			
	346	348	12	58				345	5	347	57
	Motor	Motor	Santa Fe Motor	Sequoia				Motor	Santa Fe Motor	Motor	Sequoia
	Leave Daily	Leave Daily	Leave Daily	Leave Daily		STATIONS		Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily
BKWOTYP Yard	7.15 PM				205.5	TO-R FRESNO	104.3	s 10.20 AM			
I					207.0	TO SUNMAID TOWER A. T. & S. F. Crossing	102.8				
	7.26				208.5	BLOSSOMA	101.3	f 10.08			
15 P	7.30				211.8	BUTLER	98.0	f 10.03			
PY					213.0	LOCANS	96.8	f			
18	7.34				214.5	IVESTA	95.3	f 9.59			
77 P	f 7.36				215.9	CLOTHO	93.9	f 9.56			
90 Yard WP	s 7.44				219.8	TO SANGER	90.0	s 9.50			
8 P	f 7.48				222.8	TARN	87.0	f 9.42			
P	f 7.52				225.3	FARGO	84.5	f 9.38			
	f 7.56				227.9	LACJAO	81.9	f 9.34			
					228.0	A. T. & S. F. Crossing (Stop)	81.8				
85 Yard P	s 8.02				229.9	TO REEDLEY	79.9	s 9.28			
63 Yard WP	s 8.11				235.0	TO DINUBA	74.8	s 9.18			
P	f				237.2	SMYRNA	72.6	f			
67 P	f 8.18				239.6	MONSON	70.2	f 9.08			
					243.6	A. T. & S. F. Crossing (Stop)	66.2				
18 P	8.30				246.4	TAURUSA	63.4	f 8.56			
14	s 8.37				249.4	TO IVANHOE	60.4	s 8.51			
P	f 8.41				252.2	ROOHE	57.6	f 8.46			
18 P	8.43				253.1	CAPLIN	56.7	f 8.44			
74 KWYP Yard	s 8.55	3.45 PM		8.35 AM	257.4	TO-R EXETER	52.4	s 8.35	s 1.45 PM	s 7.50 PM	
8	f 9.00	3.50		8.45	260.5	BURR	49.3	8.25	1.39	7.44	
124 P Yard	s 9.08	s 3.58		s 8.53	264.3	TO LINDSAY	45.5	s 8.20	s 1.33	s 7.38	
32 P	s 9.15	f 4.05		s 9.00	268.6	TO STRATHMORE	41.2	s 8.10	f 1.23	f 7.28	
7	f				270.9	ZANTE	38.9				
14 P	s 9.30	s 4.15		s 9.10	274.4	PORTERVILLE	35.4	s 8.00	s 1.15	s 7.20	
42 BKWYP Yard	9.34	4.30 PM		9.25 AM	274.8	TO-R PORTERVILLE-OLIVE ST.	35.0	7.57	1.05 PM	7.10 PM	
13	9.38				276.5	PONOA	33.3	7.54			
25	f				278.0	LOIS	31.8	f			
17 P	s 9.47				282.6	TO TERRA BELLA	27.2	f 7.45			
69 KP	s 9.55		9.03 AM		287.1	TO-R DUCOR	22.7	f 7.38	s 12.56 PM		
17 P	f 10.00		9.08		290.0	ORRIS	19.8	f 7.32	12.51		
Spur	f		f		291.5	VESTAL	18.3	f	f		
67 YP	f 10.07		f 9.15		294.9	RIOH GROVE	14.9	f 7.25	f 12.44		
18 P	f 10.13		f 9.21		299.0	JASMIN	10.8	f 7.19	f 12.38		
4 KWTP	s 10.30 PM		s 9.36 AM		309.8	TO-R FAMOSO	0.0	7.03 AM	12.23 PM		
	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily		(104.3)		Leave Daily	Leave Daily	Leave Daily	Leave Daily
	(3.15) 32.09	(0.45) 23.20	(0.33) 41.27	(0.50) 20.88	Time over District.....		(3.17) 31.76	(0.33) 41.27	(0.40) 26.10	(0.40) 26.10

ADDITIONAL STATIONS:

Goldleaf.....	209.9	Elco (Spur).....	227.6
Eshel (Spur).....	210.6	Dorsey (Spur).....	250.8
Reka.....	221.0	Lort (Spur).....	254.0
Rusconi (Spur).....	221.8	Vance.....	262.8
Uva (Spur).....	227.1	Stout (Spur).....	265.8
		Lisko (Spur).....	272.2
		Quality.....	295.9

No. 347 and No. 57 head 'n at east end of siding at Exeter and use siding to junction of Visalia Branch

FRESNO SUBDIVISION

Capacity of Sidings in Car Lengths	EASTWARD		Distance from San Francisco	Time Table No. 157 December 13, 1936	Distance from Clavicle	WESTWARD	
	Success Branch					STATIONS	
	STATIONS						
Yard 42 BKWYP			274.8	TO-R PORTERVILLE-OLIVE ST.	13.3		
			275.6	A. T. & S. F. CROSSING (Stop)	12.5		
			278.6	PERNU JOT.	9.5		
15			280.0	WORTH	8.1		
26			282.4	SUCCESS	5.7		
			288.1	CLAVICLE	0.0		
				(13.3)			

.....Time over District.....
.....Average speed per hour.....

Capacity of Sidings in Car Lengths	EASTWARD		Distance from San Francisco	Time Table No. 157 December 13, 1936	Distance from Pernu	WESTWARD	
	Pernu Branch					STATIONS	
	STATIONS						
Spur			278.6	PERNU JOT.	1.3		
Spur			279.3	TANDY	0.6		
			279.9	PERNU	0.0		
				(1.3)			

.....Time over District.....
.....Average speed per hour.....

Capacity of Sidings in Car Lengths	EASTWARD		Distance from San Francisco	Time Table No. 157 December 13, 1936	Distance from Jovista	WESTWARD	
	Richgrove Branch					STATIONS	
	STATIONS						
72			294.9	RIOH GROVE	4.1		
50			297.6	TROCHA	1.4		
18			299.0	JOVISTA	0.0		
				(4.1)			

.....Time over District.....
.....Average speed per hour.....

TEHACHAPI SUBDIVISION

EASTWARD

WESTWARD

EASTWARD											Distance from San Francisco	Time Table No. 157	Distance from Mojave	WESTWARD							
SECOND CLASS				FIRST CLASS								FIRST CLASS						THIRD CLASS			
Capacity of Sidings in Car Lengths	816 Freight	814 Freight	812 Freight	810 Freight	56 Tehachapi	2 Santa Fe Passenger	52 San Joaquin	10 Santa Fe Passenger	60 West Coast	26 Owl		55 Tehachapi		23 Santa Fe Passenger	51 San Joaquin	9 Santa Fe Passenger	25 Owl	59 West Coast	811 Freight	813 Freight	815 Freight
	Leave Daily	Leave Daily	Leave Daily	Leave Daily	Leave Daily	Leave Daily	Leave Daily	Leave Daily	Leave Daily	Leave Daily	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily		
BKWOTYP Yard					11.40 PM		4.30 PM		3.05 AM	2.31 AM	67.8	s 3.10 AM		s 1.15 PM		s 11.55 PM	s 1.30 AM				
KI P	6.30 PM	11.55 AM	6.05 AM	12.01 AM	11.42	7.20 PM	4.32	8.20 AM	3.07	2.33	67.1	3.07	11.35 AM	1.13	9.00 PM	11.52	1.27	8.55 AM	6.00 PM	2.35 AM	
No Siding P											63.6										
50 P					f						60.6	f									
80 P	6.55	12.20 PM	6.30	12.26	12.05 AM	7.39	4.50	8.39	3.27	2.52	52.8	2.47	11.13	12.56	8.36	11.30	1.05	8.22	5.30	2.10	
85 P	7.03	12.28	6.38	12.34	12.11	7.44	4.55	8.44	3.33	2.58	49.4	2.42	11.08	12.51	8.30	11.24	12.59	8.12	5.16	2.00	
East 68 West 68 IWP	7.18	12.42	6.50	12.49	s 12.21	7.53	f 5.04	8.53	3.42	3.07	45.5	s 2.33	f 10.59	f 12.42	8.20	11.15	12.49	8.00	5.04	1.48	
82 P											42.5	2.25	10.51	12.34	8.12	11.08	12.42	7.50	4.45	1.39	
West 71 East 71 IWP					12.37	8.06					40.2			8.06			12.37				
71 IP	7.40	1.13	7.17	1.11	12.43	8.10	5.21	9.10	3.59	3.24	38.4										
East 73 West 73 P	7.52	1.23	7.27	1.21	12.50	8.17	5.28	9.17	4.06	3.31	35.2	2.09	10.35	12.18	7.52	10.52	12.26	7.27	4.27	1.21	
123 IWP House 66	8.10	1.45	7.55	1.41	f 12.59	8.25	f 5.36	9.25	4.15	3.40	31.9	s 2.02	10.28	f 12.11	7.45	10.44	12.18	7.17	4.17	12.59	
99 P	8.32	1.57	8.10	1.55	1.07	8.32	5.43	9.32	4.22	3.47	28.9	1.55	10.21	12.04 PM	7.38	10.37	12.11	7.07	4.07	12.47	
West 69 East 69 IWP	8.45	2.05	8.21	2.05	1.14	8.38	5.49	9.38	4.28	3.53	26.6	1.50	10.16	11.59 AM	7.33	10.31	12.05 AM	7.00	4.00	12.40	
81 P	8.55	2.15	8.32	2.15	1.22	8.46	5.57	9.46	4.35	4.00	24.0	1.44	10.10	11.53	7.27	10.25	11.59 PM	6.52	3.52	12.32	
100 IWP Yard	9.14	2.30	8.45	2.35	s 1.33	f 8.56	s 6.07	9.56	4.44	f 4.10	20.1	s 1.35	s 10.01	s 11.44	7.17	f 10.15	11.50	6.40	3.40	12.20 AM	
100 YP					1.37	9.00	6.11	10.00	4.48	4.14	18.3	1.31	9.58	11.41	7.14	10.11	11.47				
70 P					f 1.42	9.04	f 6.15	10.04	4.53	4.18	15.7	s 1.26	9.54	f 11.37	7.10	10.07	11.43				
YP Yard											12.7										
WP					1.49	9.10	6.22	10.10	4.59	4.24	10.8	f 1.17	9.47	11.29	7.02	9.59	11.35				
78 P					1.57	9.18	6.30	10.18	5.06	4.31	6.4	1.07	9.37	11.21	6.52	9.50	11.26				
Yard BKWOTYP	10.25 PM	3.45 PM	9.55 AM	3.55 AM	s 2.10 AM	s 9.32 PM	s 6.43 PM	10.32 AM	5.20 AM	s 4.45 AM	0.0	12.50 AM	9.20 AM	11.06 AM	6.35 PM	9.35 PM	11.10 PM	5.40 AM	2.40 PM	11.20 PM	
	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily		Leave Daily	Leave Daily	Leave Daily	Leave Daily	Leave Daily	Leave Daily	Leave Daily	Leave Daily	Leave Daily	
	(3.55) 17.13	(3.50) 17.50	(3.50) 17.50	(3.54) 17.17	(2.30) 27.12	(2.12) 30.50	(2.13) 30.51	(2.12) 30.50	(2.15) 30.13	(2.14) 30.35		(2.20) 29.05	(2.15) 29.82	(2.09) 31.53	(2.25) 27.76	(2.20) 29.05	(2.20) 29.05	(3.15) 20.64	(3.20) 20.13	(3.15) 20.64	

Time Table No. 157
December 13, 1936

STATIONS

- TO-R BAKERSFIELD 0.7
- TO-R KERN JCT. 3.4
- MAGUNDEN 3.1
- TO EDISON 7.8
- BENA 3.4
- ILMON 3.9
- TO CALIENTE 3.0
- ALLARD 2.3
- TO BEALVILLE 1.8
- OLIFF 3.2
- ROWEN 3.3
- TO WOODFORD 3.0
- WALONG 2.3
- TO MAROEL 2.6
- CABLE 3.9
- TO-R TEHACHAPI 1.8
- SUMMIT SWITOH 2.6
- MONOLITH 3.0
- ERIO 1.9
- CAMERON 4.4
- WARREN 6.4
- TO-R MOJAVE

(67.8)
Time over District
Average Speed per Hour

Schedule time and train orders at Tehachapi apply at end of double track.

MOJAVE SUBDIVISION

EASTWARD									Distance from San Francisco	Time Table No. 157 December 13, 1936	Distance from Saugus	WESTWARD					
SECOND CLASS				FIRST CLASS				FIRST CLASS				THIRD CLASS					
Capacity of Sidings in Car Lengths	816 Freight	814 Freight	810 Freight	52 San Joaquin	60 West Coast	26 Owl	56 Tehachapi	51 San Joaquin				25 Owl	59 West Coast	55 Tehachapi	811 Freight	813 Freight	815 Freight
	Leave Daily	Leave Daily	Leave Daily	Leave Daily	Leave Daily	Leave Daily	Leave Daily	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily			
BKWOTYP Yard	11.25 PM	4.50 PM	4.40 AM	6.46 PM	5.25 AM	4.55 AM	2.30 AM	380.7	TO-R MOJAVE 4.1	69.9	s 11.03 AM	s 9.25 PM	s 11.06 PM	s 12.37 AM	5.25 AM	1.40 PM	10.30 PM
84 P	11.35	5.00	4.50	6.52	5.31	5.01	2.36	384.8	FLETA 2.5	65.8	10.57	9.19	11.00	12.31	5.15	1.25	10.16
85 P	11.40	5.05	5.05	6.55	5.35	5.05	2.40	387.3	GLOSTER 3.1	63.3	10.54	9.15	10.56	12.27	5.05	1.15	10.11
81 P	11.46	5.11	5.15	6.59	5.40	5.10	2.45	390.4	ANSEL 3.9	60.2	10.50	9.10	10.51		4.53	1.06	10.03
80 P	11.53 PM	5.18	5.25	7.04	5.46	5.16	f 2.52	394.3	ROSAMOND 5.6	56.3	10.45	9.04	10.45	f 12.17	4.46	12.58	9.56
50 P	12.09 AM	5.28	5.35	7.10	5.54	5.24	3.00	399.9	OBAN 5.6	50.7	10.38	8.56	10.37	12.09	4.36	12.48	9.46
70 KWP Yard	12.30	5.45	5.50	s 7.18	6.02	5.32	s 3.11	405.5	TO-R LANCASTER 4.3	45.1	s 10.31	f 8.48	10.28	s 12.01 AM	4.26	12.38	9.36
50 P	12.43	6.00	6.08	7.23	6.08	5.38	3.18	409.8	DENIS 4.0	40.8	10.25	8.40	10.18	11.46 PM	4.18	12.29	9.28
68 WOY P	12.51	6.08	6.28	f 7.28	6.13	5.43	s 3.27	413.8	TO PALMDALE 2.5	36.8	f 10.20	8.35	10.13	s 11.40	4.10	12.21	9.20
90 P	12.58	6.15	6.35	7.32	6.17	5.47	3.32	416.3	HAROLD 4.2	34.3	10.16	8.31	10.09	11.36	4.04	12.14 PM	9.13
East 75 Yard West 81 YP	1.20	6.45	7.00	7.43	6.29	5.59	3.46	420.5	TO VINCENT 4.5	30.1	10.07	8.22	10.00	11.27	3.46	11.59 AM	9.00
84 P	1.34	6.59	7.19	7.53	6.39	6.09	3.56	425.0	PARIS 1.1	25.6	9.57	8.11	9.49	11.17	3.22	11.32	8.35
32 P							f 4.00	426.1	ACTON 2.9	24.5			f 11.14				
95 WP	1.50	7.21	7.41	8.02	6.48	6.18	f 4.09	429.0	RAVENNA 5.6	21.6	9.48	8.02	9.40	f 11.06	3.09	11.19	8.02
82 P	2.15	7.36 7.47	7.58	8.14	7.00	6.30	4.22	434.6	RUSS 4.2	16.0	9.36	7.47	9.26	10.54	2.52	11.02	7.36
101 WP	2.39	8.05	8.11	8.23	7.09	6.39	f 4.33	438.8	TO LANG 4.3	11.8	9.27	7.38	9.17	f 10.44	2.39	10.49	7.19
85 P	2.53	8.18	8.24				4.44	443.1	HUMPHREYS 3.8	7.5			f 10.34	2.27	10.37	7.07	
81 P	3.05	8.30	8.36	8.41	7.27	6.57	4.54	446.9	HONBY 3.7	3.7	9.10	7.19	8.59	10.25	2.16	10.26	6.56
W 78 E 71 BKWOY Yard P	3.20 AM	8.50 PM	8.50 AM	s 8.50 PM	7.35 AM	7.05 AM	s 5.04 AM	450.6	TO-R SAUGUS	0.0	9.02 AM	7.10 PM	8.50 PM	10.17 PM	2.05 AM	10.15 AM	6.45 PM
	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily	Arrive Daily		69.9		Leave Daily	Leave Daily	Leave Daily	Leave Daily	Leave Daily	Leave Daily	Leave Daily
	(3.55) 17.84	(4.00) 17.47	(4.10) 16.77	(2.04) 33.82	(2.10) 32.26	(2.10) 32.26	(2.34) 27.23		Time over District.....		(2.01) 34.66	(2.15) 31.06	(2.16) 30.84	(2.20) 29.93	(3.20) 20.97	(3.25) 20.45	(3.45) 18.64
									Average Speed per Hour.....								

At Saugus: San Joaquin Division time table schedules and train orders apply at the east switch of the eastward siding.
 Los Angeles Division time table schedules and train orders apply at the Junction switch of the Santa Paula Line.
 The main track at Saugus between the Junction switch and east switch of the eastward siding may be used by any train, if track is known to be clear. Care must be taken not to delay first-class trains

ADDITIONAL FLAG STOPS TO RECEIVE OR DISCHARGE REVENUE PASSENGERS					
Train	At	Receive or Discharge	To (or beyond)	From (or beyond)	Frequency
26	Lancaster	Receive	Glendale		Daily
26	Palmdale	Receive	Glendale		Daily
26	Saugus	Receive	Colton		Daily
59	Lancaster	Receive	Stockton		Daily
60	Lancaster	Discharge		Stockton	Daily

FRESNO SUBDIVISION

Capacity of Sidings in Car Lengths	EASTWARD				Distance from San Francisco	Time Table No. 157		Distance from Exeter	WESTWARD			
	FIRST CLASS					December 13, 1936			FIRST CLASS			
	348 Motor		58 Sequoia			Kerman and Visalia Branches			341 Motor	347 Motor	57 Sequoia	
	Leave Daily	Leave Daily			STATIONS	Arrive Daily	Arrive Daily	Arrive Daily				
48 WYP				193.0	TO-R KERMAN 6.7	70.2						
No Siding				199.7	MO MULLIN 5.4	63.5						
39				205.1	RAISIN CITY 5.6	58.1						
48				210.7	CARUTHERS 6.1	52.5						
21				216.8	OANDO 3.5	46.4						
				220.3	LATON & WESTERN RY. CROSSING (Stop) 2.7	42.9						
47				223.0	HARDWICK 6.1	40.2						
East 40 WYP West 35 Yard		2.00 PM		229.1	TO-R ARMONA 3.1	34.1	s 1.50 PM					
I				232.2	A. T. & S. F. CROSSING 0.3	31.0						
66 BKP Yard		s 2.10		232.5	TO-R HANFORD 1.4	30.7	1.40 PM	s 3.25 PM				
Spur				233.9	SHELL 3.7	29.3						
54				237.6	REMNOY 7.7	25.6						
94 WOYP Yard		s 2.58	7.50 AM	245.3	A.B.S. TO-R GOSHEN JCT. 7.8	17.9	s 2.58	s 8.45 PM				
41 P		s 3.20	s 8.10	253.1	A.B.S. VISALIA 0.1	10.1	s 2.15	s 8.20				
				253.2	A. T. & S. F. CROSSING Stop 2.0	10.0						
P		3.30	8.20	255.2	AMBLER 2.1	8.0		2.02	8.07			
Spur				257.3	RECTOR 1.7	5.9						
7 P		3.36	8.26	259.0	FARMERSVILLE 1.2	4.2		1.56	8.01			
P		3.38	8.28	260.2	A.B.S. GIANT OAK 3.0	3.0		1.53	7.58			
74 KWYP		s 3.43 PM	s 8.35 AM	263.2	TO-R EXETER (70.2)	0.0		1.48 PM	7.53 PM			
		Arrive Daily	Arrive Daily				Leave Daily	Leave Daily	Leave Daily			
		(1.43) 19.86	(0.45) 23.86	Time over District.....		(0.10) 20.40	(1.37) 18.98	(0.52) 20.65			
				Average Speed per Hour.....							

Capacity of Sidings in Car Lengths	EASTWARD				Distance from San Francisco	Time Table No. 157		Distance from Hardwick	WESTWARD			
	FIRST CLASS					December 13, 1936			Riverdale Branch			
	341 Motor		347 Motor			STATIONS						
	Arrive Daily	Arrive Daily	Arrive Daily		STATIONS	Arrive Daily	Arrive Daily	Arrive Daily				
Y				181.9	INGLE 5.3	42.3						
39				187.2	TRANQUILITY 4.5	37.0						
56				191.7	SAN JOAQUIN 3.3	32.5						
				194.9	CALDWELL 4.1	29.3						
25				199.0	TO HELM 7.2	25.2						
20				206.2	BURRELL 3.2	18.0						
				209.4	BENDER 5.2	14.8						
7				214.6	TO RIVERDALE 2.6	9.6						
Spur 4				217.2	ROBINSON 2.0	7.0						
Spur 3				219.2	HUB 1.8	5.0						
				221.0	LATON & WESTERN RY. CROSSING (Stop) 3.2	3.2						
52 Yard				224.2	HARDWICK (42.3)	0.0						
				Time over District.....							
				Average Speed per Hour.....							

Capacity of Sidings in Car Lengths	EASTWARD				Distance from San Francisco	Time Table No. 157		Distance from Oil City	WESTWARD			
	FIRST CLASS					December 13, 1936			Oil City Branch			
	348 Motor		58 Sequoia			STATIONS						
	Leave Daily	Leave Daily			STATIONS	Arrive Daily	Arrive Daily	Arrive Daily				
				308.6	R OIL JCT. 1.9	5.1						
				310.5	SEGURO 1.1	3.2						
				311.6	MALTA 2.1	2.1						
				313.7	OIL CITY 5.1	0.0						
				Time over District.....							
				Average speed per hour.....							

Note.—Oil Jct. to Oil City operated as part of Bakersfield yard.

Capacity of Sidings in Car Lengths	EASTWARD				Distance from San Francisco	Time Table No. 157		Distance from Leroy	WESTWARD			
	FIRST CLASS					December 13, 1936			Coalinga Branch			
	341 Motor		347 Motor			STATIONS						
	Arrive Daily	Arrive Daily	Arrive Daily		STATIONS	Arrive Daily	Arrive Daily	Arrive Daily				
East 40 WYP West 35 Yard				229.1	TO-R ARMONA 2.1	42.9						
Spur				231.2	ORION 2.7	40.8						
57 P				233.9	TO LEMOORE 1.5	38.1						
14 Spur				235.4	HEINLEN 1.1	36.6						
65 YP				236.5	ROSSI 2.9	35.5						
5 P				239.4	LETHENT 6.7	32.6						
48 P				246.1	WESTHAVEN 6.6	25.9						
39 P				252.7	TO HURON 7.3	19.3						
14 P				260.0	TURK 6.7	12.0						
38 P				266.7	ORA 1.7	5.3						
71 YP Yard				268.4	TO-R COALINGA 1.5	3.6						
16 Spur				269.9	CRUMP 2.1	2.1						
Spur				272.0	LEROY (42.9)	0.0						
				Time over District.....							
				Average Speed per Hour.....							

FRESNO SUBDIVISION

Capacity of Sidings in Car Lengths	EASTWARD		Distance from San Francisco	Time Table No. 157 December 13, 1936		Distance from Friant	WESTWARD	
				Clovis Branch				
				STATIONS				
Yard BKWOTYP			205.5	TO-R FRESNO 1.6	24.4			
I			207.1	FRESNO TOWER A. T. & S. F. CROSSING 2.3	22.8			
Spur			209.4	BARTON 2.2	20.5			
Spur 18			211.6	GRANZ 0.2	18.3			
Spur 44			211.8	MALTERMORO 0.3	18.1			
			212.1	NAVIN 0.8	17.8			
10			212.9	LAS PALMAS 0.3	17.0			
			213.2	FRESNO INTERURBAN RY. CROSSING 0.7	16.7			
No Siding			213.9	VANRIS 1.0	16.0			
27			214.9	TARPEY 1.2	15.0			
17			216.1	MELVIN 1.3	13.8			
37 W			217.4	TO OLOVIS 1.1	12.5			
7			218.5	GLORIETTA 2.4	11.4			
67			220.9	PINEDALE JOT. 2.0	9.0			
38			222.9	GORDON 2.8	7.0			
			225.7	ROCKFIELD 0.3	4.2			
			226.0	GAND 3.9	3.9			
63 WT Yard			229.9	FRIANT	0.0			
				(24.4)				

..... Time over District.....
..... Average speed per hour.....

FRESNO SUBDIVISION

Capacity of Sidings in Car Lengths	EASTWARD		Distance from San Francisco	Time Table No. 157 December 13, 1936		Distance from Olig	WESTWARD	
				McKittrick Branch				
				STATIONS				
KI			313.6	TO-R KERN JOT. 1.7	49.1			
P			315.3	BAKERSFIELD CORRALES 1.4	47.4			
15			316.7	STRADER 2.1	46.0			
43 P			318.8	WIBLE ORCHARD 1.7	43.9			
			320.5	VENOLA 2.1	42.2			
54 YP			322.6	GOSFORD 5.8	40.1			
46			328.4	STEVENS 2.3	34.3			
Spur 3			330.7	STRAND 5.4	32.0			
			336.1	RIO BRAVO 9.3	26.6			
			345.4	KILOWATT 0.9	17.3			
91			346.3	TO BUTTONWILLOW 4.2	16.4			
64			350.5	LOKERN 10.1	12.2			
30 Y			360.6	McKITTRICK 2.1	2.1			
			362.7	OLIG	0.0			
				(49.1)				

..... Time over District.....
..... Average speed per hour.....

TEHACHAPI SUBDIVISION

Capacity of Sidings in Car Lengths	EASTWARD		Distance from San Francisco	Time Table No. 157 December 13, 1936		Distance from Stratford	WESTWARD	
				Stratford Branch				
				STATIONS				
41			244.1	TO STRATFORD 4.2	0.0			
Spur 20			239.9	OUNEO 3.4	4.2			
65 YP			236.5	ROSSI	7.6			
				(7.6)				

..... Time over District.....
..... Average speed per hour.....

Capacity of Sidings in Car Lengths	EASTWARD		Distance from San Francisco	Time Table No. 157 December 13, 1936		Distance from Arvin	WESTWARD	
				Arvin Branch				
				STATIONS				
			316.6	MAGUNDEN 0.3	16.5			
			316.9	ALGOSO 4.2	16.2			
			321.1	HARPERTOWN 3.5	12.0			
			324.6	LAMONT 2.2	8.5			
			326.8	RIBIER 2.0	6.3			
			328.8	DI GIORGIO 1.9	4.3			
			330.7	GIFFIN JOT. 2.4	2.4			
			333.1	ARVIN	0.0			
				(16.5)				

..... Times over District.....
..... Average speed per hour.....

Additional Stations { GIFFIN 332.1 (on Spur 1.4 miles from Giffin Jct.)
 { VACCARO . . 334.4 (on spur 1.3 miles from Arvin)

MOJAVE SUBDIVISION

SUNSET RAILWAY COMPANY

EASTWARD			Distance from San Francisco	Time Table No. 157 December 13, 1936			Distance from Owensyo	WESTWARD		
Capacity of Sidings in Car Lengths	SECOND CLASS	FIRST CLASS		STATIONS	SECOND CLASS	THIRD CLASS		Arrive Daily Ex. Monday	Arrive Daily	
	802	788			789	803				
	Freight	Mixed		Owenyo Branch		Mixed	Freight			
	Leave Daily	Leave Daily Ex. Sunday								
BKWOTYP Yard	4.00 PM	1.25 AM	380.7	TO-R MOJAVE 1.3	143.5	s 12.30 AM	11.05 PM			
45	4.04	f 1.29	380.8	CHAFFEE 3.2	142.2	f 12.20	10.55			
48	4.11	f 1.36	384.0	OAMBIO 8.9	139.0	f 12.05 AM	10.40			
48	4.20	f 1.55	392.9	NEURALIA 4.4	130.1	f 11.45 PM	10.20			
48	4.30	f 2.04	397.3	CINCO 5.2	125.7	f 11.30	10.05			
East 48 W West 48	5.00	s 2.19	402.5	CANTIL 2.8	120.5	s 11.15	9.50			
Spur 15		f	405.3	GYPSITE 2.2	117.7	f				
39	5.15	f 2.30	407.5	CENEDA 1.0	115.5	f 10.50	9.20			
2	5.18	f 2.32	408.5	SALTDAL 2.1	114.5	f 10.45	9.15			
		f	410.6	TOBY 1.6	112.4	f				
East 48 Y West 70	5.30	f 2.40	412.2	GARLOOK 4.2	110.8	f 10.35	9.00			
48	5.40	f 2.49	416.4	GOLER 4.1	106.6	f 10.25	8.45			
48	5.55	f 3.00	420.5	RAND 7.9	102.5	f 10.15	8.30			
48 Yard	6.15 PM	s 3.45	428.4	TO-R SEARLES 4.4	94.6	s 9.55	8.00 PM			
48		f 3.55	432.8	RADEMACHER 5.5	90.2	f 9.10				
52		f 4.06	438.3	CODE 8.9	84.7	f 8.55				
48		s 4.28	447.2	INYOKERN 4.5	75.8	s 8.35				
Spur 27 W		f 4.38	451.7	LELITER 4.6	71.3	f 8.20				
48		s 4.48	456.3	BROWN 4.4	66.7	s 8.10				
48		f 4.57	460.7	LINNIE 7.6	62.3	f 7.53				
47		s 5.15	468.3	LITTLE LAKE 3.2	54.7	s 7.35				
48 Y		f 5.25	471.5	COSO 4.1	51.5	f 7.25				
48		f 5.35	475.6	SYKES 8.5	47.4	f 7.15				
47 W		f 5.57	484.1	HAIWEE 4.4	38.9	f 6.55				
52		f 6.06	488.5	LOCO 4.8	34.5	f 6.45				
48		f 6.16	493.3	OLANOHA 4.4	29.7	f 6.35				
52		s 6.30	497.7	CARTAGO 4.6	25.3	s 6.25				
52		f 6.40	502.3	MONACHEE 4.0	20.7	f 6.01				
52		f 6.48	506.3	BRIER 2.9	16.7	f 5.54				
		f	509.2	BARTLETT 5.1	13.8	f				
-52 W		f 7.04	514.3	DIAZ 4.5	8.7	f 5.40				
East 28 West 52		s 7.40	518.8	LONE PINE 4.2	4.2	s 5.30				
37 KOY Yard		s 7.55 AM	523.0	TO-R OWENYO	0.0	5.15 PM				
	Arrive Daily	Arrive Daily Ex. Sunday		(143.5)		Leave Daily Ex. Sunday	Leave Daily			
	(2.15) 21.73	(6.30) 22.07	Time over District.....		(7.15) 19.79	(3.05) 15.85			
			Average speed per hour.....						

Capacity of Sidings in Car Lengths	EASTWARD	Distance from Gosford	Time Table No. 157 December 13, 1936		Distance from Maricopa	WESTWARD
			STATIONS			
50 YP		0.0	R	GOSFORD 3.0	31.9	
14 SP		3.0		BANNISTER 6.5	28.9	
40		9.5		CONNER 4.7	22.4	
41 W		14.2		MILLUX 6.7	17.7	
48		21.9		KYAN 6.5	11.0	
55 Y		27.4	R	PENTLAND 2.7	4.5	
22 Y		30.1		HAZELTON 1.8	1.8	
Yard 11		31.9	R	MARICOPA	0.0	
				(31.9)		
			Time over District.....		
			Average speed per hour.....		

Capacity of Sidings in Car Lengths	EASTWARD	Distance from Pentland	Time Table No. 157 December 13, 1936		Distance from Shale	WESTWARD
			STATIONS			
55 Y		0.0	R	PENTLAND 2.2	17.0	
47		2.2		KERTO 2.09	14.8	
22		5.1		SIGNA 3.06	12.8	
Yard 39		8.7	TO	TAFT 3.8	8.3	
20		12.5		MIDOIL 2.0	4.5	
Yard 15		14.5		FELLOWS 2.5	2.5	
12 Y		17.0	R	SHALE	0.0	
				(17.0)		
			Time over District.....		
			Average speed per hour.....		

ADDITIONAL STATIONS		Distance from Gosford	Distance from Pentland
Levee.....		16.5	
Winoil.....			3.4
Lowry.....			7.1
Chanslor.....			11.2

SPECIAL INSTRUCTIONS

Southern Pacific Company Rules and Regulations of the Transportation Department, Air Brake Rules and Special Instructions in San Joaquin Division Time Table govern on Sunset Ry.

Train will not exceed the speed in miles per hour shown below.

BETWEEN	Pass.	Freight	Backing
Gosford and Pentland.....	30	30	20
Except with large loaded oil cars	..	25	20
Pentland and curve west Hazelton.	25	25	20
Except with large loaded oil cars	..	20	20
Curve west Hazelton and Maricopa	12	12	12
Pentland and M. P. 3.....	20	20	20
Except on curve Pentland.....	12	12	12
M. P. 3 and Shale.....	20	20	20
East Switch Long Siding at Taft and derailer in main track west of Taft	10	10	10

At Pentland, normal position of junction switch will be for Taft line.

There is a spring derailer on main track 900 feet west of west switch at Taft.

RULE 93: Yard limits are established at:
Pentland
Taft
Maricopa.

RULE 2. Authorized watch inspectors:

S. A. Pope, Manager of Time Service, 65 Market St., San Francisco.
 Fresno.. Bert Fuller, 1335 Fulton St. Visalia... A. G. Hooper,
 Fresno.. A. L. Colvin, 1211 Fulton St. 111 W. Main St.
 Porterville..... Frank Haener Exeter..... W. B. Adams
 Hanford..... Hanford Jewelry Co. Bakersfield. J. N. Cheney,
 Lancaster..... C. E. Miller 1425 19th St.—801 Baker St.
 San Fernando..... F. G. Marshall Mojave..... A. Ogulnick
 { Newton Moore, 301 O. T. Johnson Bldg.
 { Geo. D. Davidson Co., 445 S. Spring St.
 { O. H. Patzer, 2708 North Broadway
 { Ralph Laraway, 1222 San Fernando Road
 Los Angeles.....

RULE 3. Conductors on eastward Santa Fe trains originating at Bakersfield will show on reverse side of Kern Jet. register ticket watch comparison made at Santa Fe station Bakersfield, also comparison with enginemen.

RULE 14 (d). As specified below, four long and one short sounds will be indication that flagman may return from west as prescribed by Rule 99.

Famoso..... Trains on Exeter main track.
 Ducor..... Trains on Minkler-Southern Branch.
 Exeter..... Trains on Visalia Branch.
 Hardwick..... Trains on Riverdale Branch.
 Ingle..... Trains on Riverdale Branch.
 Goshen Jct..... Trains on Kerman Branch.

RULE 14 (e). As specified below, six long sounds will be indication that flagman may return from east as prescribed by Rule 99.

Fresno..... Trains on Exeter main track and Clovis Branch.
 Porterville..... Trains on Success Branch.
 Rossi..... Trains on Stratford Branch.
 Goshen Junction... Trains on Visalia Branch.
 Ingle..... Trains on Riverdale Branch.
 Richgrove..... Trains on Richgrove Branch.
 Magunden..... Trains on Arvin Branch.
 Mojave..... Trains on Owenyo Branch.

RULES 17 and 19. Night signals will be displayed through all tunnels.

RULE 21. In Bakersfield and Fresno indicators on engines may be displayed to relief track.

RULE D-71. Trains and engines may move between Calwa Tower and Clinton Ave., Fresno, with current of traffic irrespective of time table superiority but must avoid delaying first class trains.

RULE S-72. Westward trains are superior to trains of the same class in the opposite direction.

RULE 83. Train registers are not maintained at Calwa Tower or Bena. When an observation check be made between Fresno and Calwa Tower, and between Bakersfield and Bena, it will apply at end of double track.

Trains approaching each other between these stations will reduce speed sufficiently to permit identification.

When first class trains on opposite track between Mojave and Tehachapi are identified, it will not be necessary to obtain check of such trains before making movements in the same direction between Summit Switch and Mojave.

Rule 14-K must be applied when approaching trains on opposite track.

RULE 83 (A). At the following stations, only the trains indicated will register.

Oil Jet..... } ... Trains originating and terminating.
 Lancaster..... }
 Famoso..... Trains to and from Exeter main track.
 Tehachapi..... First and second class trains, and trains originating and terminating.
 Goshen Jct..... No. 55, No. 56, No. 57, No. 58 and trains to and from Visalia and Kerman Branches, and extras originating and terminating.

Extra trains register at Porterville Olive St., Exeter, Armona and Coalinga.

RULE 83 (B). At open train order offices trains may register by ticket as follows:

Kern Jet..... Santa Fe trains, S. P. first class trains and Westward light engines.
 Tehachapi..... First and second class trains.
 Porterville Olive St. First class trains.
 Famoso..... Trains to and from Exeter Main Track.

Operator Kern Jet. will report arrival and departure Santa Fe first-class trains to Operator Bakersfield, who will enter same on register.

Operator Kern Jet. will report arrival and departure of all scheduled trains to operator Santa Fe station Bakersfield, who will enter same on Southern Pacific register located at Santa Fe station Bakersfield.

RULE 83 (D). Westward Santa Fe trains via Southern Pacific will get clearance and train orders from operator Santa Fe station Bakersfield authorizing movement from Oil Junction westward.

Eastward Clovis Branch trains destined to Fresno Interurban secure train orders or clearance from operator at Fresno Tower, authorizing movement over Fresno Interurban.

Conductors and Engineers from Riverdale Branch to Western Division, in addition to orders and clearance signed by Chief Dispatcher of Western Division, authorizing movement from Ingle to Kerman on Los Banos subdivision of Western Division, will also procure from operator at the same point where such orders and clearances are issued, clearance signed by Chief Dispatcher of the San Joaquin Division.

Trains via Visalia and Kerman branches must obtain clearance before leaving Goshen Jet, when operator on duty.

Scheduled trains originating Hanford and Armona are not required to obtain a clearance when no cp rator on duty.

RULE 83 (E). A train, when authorized by train order, may check the register against an extra train and proceed if such extra train appears on the register with the number and date of its restricting order registered in column captioned "Signals".

When a train is so authorized to check the register, it must register and place the restricting order number and date in column captioned "Signals".

When directed to register an extra train must show in column captioned "Signals", number and date of train order restricting its movement.

RULE 93. Yard limits are established at:

Fresno	Bakersfield	Summit Switch
Goshen Jct.	Visalia	Eric
Coalinga	Exeter	Mojave
Armona	Lindsay	Searles
Hanford	Porterville Olive St.	Owenyo
Sanger	Dinuba	Saugus
Reedley	Kingsburg	Selma
Delano	Friant	Lancaster
Tulare	Tehachapi	Vincent

Fresno: Limits are defined by yard limit signs at the following points:

Kerman Line..... Mile Post 206.32.
 Merced Line..... Mile Post 199.08.
 Bakersfield Line... Mile Post 210.81.
 Exeter Main Track... Mile Post 208.15.
 Clovis Branch..... Mile Post 209.6.

Trains or engines will not move against current of traffic on double track between Divisadero Street and Clinton Avenue and between Cherry Avenue and Calwa Tower, Fresno, except on authority of Yardmaster. When making movements against current of traffic, trains or engines must be preceded by flagman over railway and street crossings at grade where wigwags are installed, protecting these crossings during movements.

Trains arriving and departing via Los Banos line at Fresno will receive proceed signal from herder at Divisadero Street, green flag by day and green light by night.

Westward trains or engines must receive proceed signal from yardman at Kern Street; and eastward trains or engines must receive proceed signal from yardman at Merced Street.

Trains may use No. 1 running track between Clinton Ave. and Biola Jct.

Mojave: First class trains may pass through Mojave without hand signals, providing switches are properly lined for such movement, and will move with caution irrespective of timetable superiority between Signals 3802 and 3811. Inferior trains entering or leaving Mojave must receive green signal unless yardmaster or his subordinate notifies train that they may enter or leave without green signal.

Trains leaving east end of yard may proceed without signal from herder provided they are notified switches are properly lined.

Trains from Owenyo Branch stop before fouling main track or blocking highway crossing regardless of position of derailer or signals received.

Unless yardmaster or his subordinate instruct otherwise, crossover movement from Owenyo Branch to Mojave will be made as follows: First throw derailer on Owenyo Branch, second throw trailing point switch on eastward main track, third crossover switch on westward main track, fourth Owenyo Branch switch—then wait five minutes before proceeding. Be governed by Rule 93.

Following code of signals will govern eastward trains entering yard: Southern Pacific:

Passenger trains..... One long.
 Freight trains..... One short, one long, one short.

Santa Fe:

Passenger trains..... One long, one short.
 Freight trains..... One long, one short, one long.

RULE D-97 (A). Will apply between Tehachapi and Summit Switch.

RULE 98. RAILROAD CROSSINGS AT GRADE NOT INTERLOCKED

- A. T. & S. F. Railway, 744 feet east of Lacjac, STOP.
- A. T. & S. F. Railway, 14718 feet west of Taurusa, STOP.
- A. T. & S. F. Railway, 602 feet east of Visalia, STOP, and not pass over crossing without receiving proceed signal from flagman, who must precede train.
- Laton & Western Railway, 2.7 miles west of Hardwick, STOP.
- Laton & Western Railway, 1.8 miles east of Hub, STOP.
- A. T. & S. F. Railway (on Success Branch), 4515 feet east of Porterville, STOP.
- Fresno Interurban Railway, 1771 feet east of Las Palmas.

Fresno—Trains from Clovis Branch and Exeter main track stop at "stop" board at junction of these lines.

Goshen Jct.—Trains from Visalia Branch stop at "stop" board east end of yard.

End of the Visalia Branch will be at first switch east of the station where it enters Bakersfield-Fresno main track.

RULE 103 (A). At Selma no switching movements will be made over West Front Street while switching industrial tracks east of station and opposite Libby, McNeill and Libby Plant unless crossing is protected by member of crew.

No train, engine, car or motor shall be stored within 100 feet of either property line of County Road Crossing or Western Dairy Products track at Tipton, unless crossing is protected by flagman.

At Armona no switching movements will be made over Lake Street crossing unless protected by member of crew.

Trains switching Knudsen Laboratories, Inc. (Creamery) Spur, Visalia, must stop before making reverse movement across Goshen Avenue crossing.

RULE 104. The normal position of switches at junctions will be for main tracks.

Exceptions:

Fresno Yard, Clinton Avenue (end of double track) for eastward track. This is an oil buffer spring switch.

Fresno, junction Los Banos line, for eastward track. This is an oil buffer spring switch.

Bena (end of double track) for westward track. This is an oil buffer spring switch.

Tehachapi (end of double track) for eastward track.

Mojave (end of double track) for westward track.

Hardwick..... for Kerman Branch

Armona..... for Coalinga Branch

Rossi..... for Coalinga Branch

Pernu Jct..... for Success Branch

Gosford..... for McKittrick Branch

Derailers in main track.

McKittrick. East wye switch is spring switch and serves as derail.

Porterville. 310 feet east of junction switch on Success Branch.

Mojave. 230 feet east of junction switch on Owenyo Branch.

Famoso. 168 feet west of junction switch, on Exeter main track.

SPECIAL INSTRUCTIONS

RULE 105. Track next to and north of main track at Ducor will be used as siding No. 1. Second track north of main track, will be used as Minkler Southern Ry. main or No. 2 track. Trains will use extreme east switch to enter or leave Southern Pacific main track. Inside switches will be left lined for Siding No. 2.

At Caliente, Bealville and Marcel the siding next to main track will be used as eastward siding, adjoining track will be used as westward siding. Inside siding switches are oil spring switches and normal position is for train entering siding. Trains entering siding passing an inoperative signal must assure themselves this switch is properly lined.

At Rowen the siding east of the crossovers will be used as the westward siding, the one west of the crossovers as the eastward siding.

Track (No. 1) next to main track west of station at Tehachapi will be used as westward siding.

At Vincent siding next to main track will be used as eastward siding, adjoining track will be used as westward siding.

Trains using other than the designated siding, unless authorized by the dispatcher, must be preceded by a flagman.

In the territory between Caliente and Tehachapi trains entering designated sidings against current of traffic must do so with caution expecting to find sidings occupied.

When pulling out of sidings they must be sure that signals in advance are for their movements and not for other trains on parallel sidings, stopping if necessary before reaching fouling point to determine their right to the route.

RULE 221. Light will not be displayed in train order signals on McKittrick, Clovis, Coalinga, Kerman, Richgrove, Riverdale, Success, Stratford and Visalia branches, except when train orders are to be delivered.

Trains will not be required to obtain clearance at Kern Jct. and Bakersfield except when such trains originate or receive orders at these stations.

RULE 221 (A). It is unnecessary for dispatchers to O. K. a clearance and operators to transmit the address and order numbers from clearance to the train dispatcher, unless requested to do so by train dispatcher, nor will they complete that portion of clearance (Form CS-2643) reading:

"OK at.....M.....Chief Train Dispatcher," all provided that said orders affect movement of a train wholly within block system or signal dispatching limits.

If the orders affect movement, either wholly or in part, outside of the block system or signal dispatching limits, operators must repeat address and order numbers and obtain dispatcher's OK before the orders are delivered.

RULE 825. Outfit cars must not be left in front of warehouses, storehouses, lumber yards, or other buildings.

House track at Woodford must not be used for setting out or storing of cars.

RULE 834. Open-top cars loaded with rails, pipe, structural steel, poles, lumber or mounted wheels, when such lading projects above side and end walls of car, must not be placed in train next to cab of mallet engines.

RULE 869. Trainmen will ride on top of trains through yards, entering and leaving terminals, through interlocking plants, also Vincent to Saugus, Vincent to Palmdale, Summit Switch to Mojave, Summit Switch to Ilmon, Searles to Cantil, McKittrick to Lokern and at other places as instructed by conductor.

AUTOMATIC BLOCK SYSTEM

A train or engine, when backing out of a siding or other track in block system limits, will, unless backed to clear block signal, proceed as if signal be in stop position.

That section of track in Fresno between Tuolumne Street and Ventura Avenue is not protected by block signals. Be governed by third paragraph Rule 93.

Dwarf light signals governing movements to main track located as follows: Signals 2020 and 2022 Clinton Ave., Fresno, Signals 2565 and 2625 at Exeter, Signal 2870 Ducor, Signal 3627 Summit Switch, and Signal 3679 Eric. The first switch or derail lined, dwarf signal will indicate red. When all switches and derail are lined dwarf signal will indicate proceed. If signal indicates stop after proper line up has been made, a train will not move to main track except as provided by Rules 509 and 99.

Fresno.—West switch and derail of running track, Fresno Yard near Biola Jct., the Biola main track junction switch and derail, and switch No. 2 track west of Ashland Ave. are hand operated by using the switch levers on side of electric switch machines.

Signals governing movements from Biola Branch and from the west end of No. 1 track will indicate stop until derails and switches have been properly lined for route desired, when signals will indicate proceed.

Exeter.—Signal 2628 at junction Visalia Branch and Exeter main track normally indicates stop until crossover lined for movement to main track.

Bena.—Eastward trains leaving siding will be governed by dwarf light Signal 3282 which will indicate proceed after siding switch has been thrown to reverse position for two minutes.

Cable-Tehachapi.—Signals 3582 and 3585 have included in their control limits a special protective device. When these signals indicate stop, careful inspection must be made of and at the fourteen foot arch 358.57 known as the 7th Tehachapi creek crossing, and it must be known that arch and embankment are safe for passage of trains before proceeding.

Tehachapi.—Trains on No. 1 track at Tehachapi ready to leave, finding dwarf light Signal 3595 at stop, will push button located in box on post two feet east of Signal 3593. After pushing this button signal will clear in two minutes if no trains in block.

Warren.—When dwarf light signals located at either end of siding indicate stop, trains entering will be preceded by a flagman.

Searles.—Automatic block signals 4277 and 4268, located at east and west end of Tunnel 29 at Searles.

Knife switches have been installed in relay boxes located at these signals for use of operators of motor cars passing through tunnel.

Motor cars should stop and if signal indicates proceed, switch in box should be thrown to reverse position which will place signals at stop before entering tunnel. After passing through tunnel, stop must be made at signal and knife switch thrown to reverse position, which will clear signals.

The following block signals, equipped with a triangular number plate, have included in their control limits some special protective device. When indicating "STOP" careful inspection must be made of the track and structure as indicated below and it must be known that they are safe for passage of trains before proceeding.

Signals	Location
2016	Clinton Ave., Fresno. Spring switch, end of double track.
3281	Bena. Spring switch, end of double track.
3308	Ilmon. Spring switch, west end.
3450	Rowen. Spring switch, west end.
3512	Walong. Spring switch, west end.
3564	Cable. Spring switch, west end.
3592	Tehachapi. Spring switch, west end.

OIL BUFFER SPRING SWITCHES

When a block signal in advance of a facing point oil buffer spring switch indicates "STOP", careful examination of switch must be made before passing over it.

When making trailing point movement and train is stopped on switches, a reverse movement must not be made, nor the slack taken until the switch has been thrown by hand. When movement has been completed through switch, reverse movement must not be made until point closes.

Running switches are prohibited and sand, blow-off cocks, and injectors must not be used nor boosters started while passing over these switches.

Oil buffer spring switches are located as follows, and speed indicated must not be exceeded when passing over such switches.

	M.P.H.
Fresno, Clinton Ave., end double track.....	Trailing westward 35
	Facing eastward 20
Fresno, junction Los Banos line.....	Trailing eastward 15
	Facing westward 10
Bena, end double track.....	Trailing eastward 35
	Facing westward 20
Bena, west end siding.....	Trailing westward 50
Ilmon, west end.....	Trailing westward 30
	Facing eastward 30
Caliente, west end siding No. 2.....	Trailing westward 10
	Facing eastward 10
Caliente, east end siding No. 1.....	Trailing eastward 10
	Facing westward 10
Allard, west end.....	Trailing westward 30
	Facing eastward 30
Bealville, west end siding No. 2.....	Trailing westward 10
	Facing eastward 10
Bealville, east end siding No. 1.....	Trailing eastward 10
	Facing westward 10
Rowen, west end.....	Trailing westward 30
	Facing eastward 30
Walong, west end.....	Trailing westward 30
	Facing eastward 30
Marcel, west end siding No. 2.....	Trailing westward 10
	Facing eastward 10
Marcel, east end siding No. 1.....	Trailing eastward 10
	Facing westward 10
Cable, west end.....	Trailing westward 30
	Facing eastward 30
Tehachapi, west end.....	Trailing westward 30
	Facing eastward 30
Summit Switch, east end.....	Trailing eastward 50

INTERLOCKING

At all interlocking plants, when route lined is not to be used, following signal will be sounded by Engineers, one short, two long and one short (o—o).

FRESNO TOWER—A. T. & S. F. Crossing 1.6 miles east of Fresno on Clovis Branch
For main track, one long whistle (—).
To or from spur track, one short and two long whistles (o —).

SUN MAID TOWER—A. T. & S. F. Crossing 1.5 miles east of Fresno on Exeter main track
One long whistle (—).

CALWA TOWER—A. T. & S. F. Crossing and double track 0.8 miles east of Calwa
Eastward trains approaching end of double track will call for switch and derailer by one long, one short and one long whistle (— o —).
Westward trains, one long whistle for crossing and for double track (—).

HANFORD TOWER—A. T. & S. F. Crossing 0.3 miles west of Hanford
One long whistle (—).

TULARE TOWER—A. T. & S. F. Crossing 0.3 miles west of Tulare
One long whistle (—).

KERN JCT. TOWER—A. T. & S. F. Crossing, double track and McKittrick Branch 0.7 mile east of Bakersfield
For main track, one long whistle (—).

For movement over crossing on siding, one long, one short and one long whistle (— o —).

From S. P. to A. T. & S. F. main track, one short and two long whistles (o —).

Between main track and transfer track, one short, one long and one short whistle (o — o).

No. 1 track, two short, one long and one short whistles (o o—o).

Dwarf light signals opposite end of double track governing westward movement are as follows:

- Green.....Westward track to S. P. single track.
- Yellow.....To Santa Fe westward double track or S. P. No. 1 track.

Dwarf light signal for eastward movement is located at west limits of interlocking plant. Light signals as follows:

- Green.....Eastward main track.
- Yellow.....Against current of traffic.

Transfer tracks have pipe connected derails to main track (transfer switch).

At Kern Jct. only, Rule 628 is modified to permit movement, without stopping, of helper cuts only, past interlocking signals in stop position, provided yellow signal is received from the towerman in tower or on ground, and helper engineer sees that track is properly lined for movement to be made.

TEHACHAPI

Main track movements (to or from double track) one long whistle (—).

No. 1 siding, one short, one long and one short whistle (o — o).

CALIENTE, ALLARD, BEALVILLE, CLIFF, WOODFORD, MARCEL

The east and west switches of sidings at Caliente, Bealville, Cliff, Woodford, Marcel and the east switch of siding at Allard are interlocked and controlled from Telegraph office. All other switches are hand throw. The switches and signals at Allard and Cliff are controlled by the plant at Bealville.

Interlocking limits extend on main track from the eastward signal, located fifty (50) feet west of the west switch, to the westward signal, located fifty (50) feet east of the east switch at Caliente, Woodford and Marcel, and on both main track and siding at Woodford, and at Bealville from the eastward signal, located fifty (50) feet west of the west switch Allard to westward signal, located fifty (50) feet east of the east switch Cliff. All signals within these limits are interlocking, except Signals 3412 and 3417, which are automatic.

When the eastbound interlocking signals east end Bealville or the westbound interlocking signals west end Cliff are inoperative, trains must be preceded by flagman to the next signal.

Trains stopped by signals must communicate with signal operator by telephone located in telephone booths at east and west switches and be governed by his instructions. Additional telephones are provided at derail west end house track Woodford, and at derail of house track extension at Caliente. If instructed by signal operator to throw interlocked switch by hand, follow instructions posted in telephone booth.

The member of crew cranking switch over, after receiving permission from signal operator, must notify rear member of his crew in order that switch will be returned to normal position, or remain at switch and return it to normal position, unless instructed by signal operator to leave switch open.

When for any reason, proceed indication of an interlocking signal cannot be acted upon at once signal operator must immediately be notified.

Trains or engines entering main track, except where fixed signals govern movement, must receive authority from signal operator then may proceed with caution, not exceeding twelve (12) miles per hour to next signal.

At Cliff, Spur switch west end siding will be hand operated and trains must not enter or leave spur except on telephone authority from signal operator at Bealville.

At Woodford "Take Siding Indicator" mounted on mast of westward interlocking signal will govern westward trains that are to use house track.

When westward third class and extra trains are given main track at Allard, and are unable to proceed farther ahead of superior trains in the same direction, they will immediately advise the signal operator at Bealville.

Trains entering sidings at Caliente, Bealville and Marcel will stop clear of adjacent siding unless a proceed signal is indicated in light signal governing the movement to main track.

FRESNO, OLIVE AVE. CROSSING, AUTOMATIC INTERLOCKER

Interlocking limits extend from eastward Light Type Signal SA-2032, located 750 feet west of Fresno Traction Company crossing to westward Light Type Signal SA-2032 located 750 feet east of this crossing.

When these signals display stop, trains will be governed by interlocking rules within the interlocking limits and Rule 509 within the automatic portion of the block beyond the interlocking limits and will be preceded to crossing by flagman.

Dwarf light type signals installed between main tracks and located 80 feet east and west of this crossing govern moving against current of traffic. These signals indicate stop only and trains must be preceded by flagman who will give proceed signal from center of crossing.

TRAIN AND AIR INSPECTION

At the following stations freight trains descending grade between Caliente and Lang will stop 10 minutes to allow heat to equalize in wheels and make inspection:

Ravenna.

Marcel Rowen.—Or in making other stops, inspection may be made provided initial run is not to exceed 8 miles, succeeding runs not to exceed 10 miles.

A continuous run of 10 miles will not be made where the run from the last inspection point was less than 7 miles.

Warren.

Owenyo Branch.—Rand. If retainers are not used, need not stop if in opinion of conductor it is safe to do so.

Freight trains must not run more than 40 miles without a stop for inspection: Except run may be made by westward freight trains, Saugus to Lancaster, Ravenna to Mojave, also from Bakersfield to Tipton and Tipton to Fresno or vice versa without stopping for train inspection when in the judgment of the conductor it is safe to do so. Inspection will be made at any intermediate stops.

AIR BRAKE RULE 11.

Air brake inspection at points where no car inspectors are on duty, and motive power and/or engine crew or train crew is changed on a freight train, shall be made as follows:

After the train is made up and the engine attached, the engineer will apply the brakes with a 20 pound service reduction and leave them applied. The trainmen will then pass along the train to determine that the brake is applied on each car. The numbers of any cars found with inoperative air brakes must be reported on Form 2809 and such cars assembled and switched to the rear of the train, next ahead of the caboose, before leaving that station. After this inspection has been made, brakes have been released, and trainmen have noted that normal brake pipe pressure has been restored as indicated on caboose gauge, and have given signal to engineer, the latter must comply with last part of Rule 11 to avoid brakes sticking from an overcharge of the brake system, etc.

If it is necessary to switch any cars to the rear account brakes being inoperative, Rule 17 must be complied with before departure.

Rule 34 must be observed to determine by rolling inspection that each brake releases properly.

Attention is directed to the Safety Appliance Act which requires that whenever any train is operated with power or train brakes, not less than 85 per cent. of the cars of such train shall have their brakes used and operated by the engineer of the locomotive drawing such train; and all power-brake cars in every such train which are associated together with the 85 per cent., shall have their brakes so used and operated.

AIR BRAKE RULE 16.

Passenger Trains: Make running air brake test at Summit Switch and between initial and crossover switch at Vincent. Not necessary to make running test on passenger trains leaving Mojave that have not had the continuity of the brake pipe broken. Eastward Santa Fe passenger trains leaving Kern Jct. will not make running test. Within yard limits of Fresno, running air brake test will be made on eastward trains only when leaving Fresno.

When running test is made leaving Fresno eastward and Bakersfield eastward and westward, trainmen will use Signal 16-H instead of hand or lamp signal.

On westward passenger trains leaving Bakersfield, running test shall not be made until rear car has cleared Baker Street.

Freight Trains: Freight trains not stopping at Summit Switch will make running air brake test between wye switches as follows: While working steam, engineer will make a reduction of approximately 7 pounds, waiting for slack to adjust itself and then add about 3 pounds, making total reduction of 10 pounds before releasing.

Conductor will note reduction on caboose gauge and following build up in pressure when brakes are released, then give proceed signal which will be relayed by other trainmen from their portion of the train, providing they note retainers releasing in their vicinity.

If conductor is on the head end, the rear brakeman is held responsible for such observance of the gauge as will insure against danger from closed angle cock or low pressure.

When such observance indicates danger, take every needed precaution as the circumstances warrant.

If releasing of brakes cannot be made at a greater speed than 15 miles per hour, stop and make rear end test.

Whenever plug tests or running tests, whichever are required under the rules, have been made on eastward trains at Tehachapi, it will not be necessary to make running tests on such trains not stopping at Summit Switch.

Westward freight trains that do not have helpers to cut out at Vincent and do not stop there for other operating reasons, will turn up the retaining valves on the first ten cars behind the engine at the east distant signal approaching Vincent, and will make air brake running test between siding switches as follows:

While working steam and not allowing driver brakes to apply, follow the same procedure as outlined in instructions relative to making the freight train running test at Summit Switch, with the exception that a release may be made at a speed not slower than 8 miles per hour. If train has to stop for any reason, or if speed of at least 8 miles per hour cannot be made at time release is desired, standing air brake test as per Rule 17 of the air brake rules will be made.

On Eastward freight trains not having helpers to cut out or required to stop at Vincent for operating reasons, they will follow the same procedure as outlined in next paragraph above, except that one retaining valve for each 115 M's contained in train will be used. These retaining valves must be turned up at or near west distant signal, the retaining valves on head portion of train to be turned up first.

AIR BRAKE RULE 17.

Rear end test will be made in accordance with Rules 17 and 17-A of the Air Brake Rules, and this test will also be made at the following places under the conditions hereinafter stated:

Vincent.....Freight trains stopping.

Summit Switch.....All trains stopping.

Mojave.....Freight trains not originating.

Leading engineer will not signal for rear end test on trains having helpers until such helpers indicate by one blast of the whistle that the train is ready for the test.

AIR BRAKE RULE 54.

Emergency hose must be used on all freight trains between Los Angeles and Bakersfield.

Trains of 50 cars or less 2 emergency plugs will be used located approximately 20th and 40th cars from engine.

Trains of 50 to 71 cars 3 plugs located approximately between 20th, 40th and 60th cars from engine.

Trains of 71 to 100 cars 4 plugs located approximately on the 20th, 40th, 60th and 80th cars from engine.

Trains of 100 to 124 cars 4 plugs located on the 20th, 40th, 60th and 100th cars from engine.

On westward freight trains plugs will be fastened on east end of car and on eastward freight trains on west end of car.

Emergency hose will be handled by carmen at Los Angeles and Bakersfield, but must be applied and removed when necessary by trainmen at intermediate stations.

In applying these hose efforts should be made to apply them between through loads so as to avoid having to change them enroute where emergency is encountered.

Handle of emergency hose must be sealed by carmen and full report made by trainmen when seal broken.

AIR BRAKE RULE 56.

Retainers will be used on passenger trains as follows:

Westward trains.....Tehachapi to Tunnel 1—All retainers

Retainers on all head end cars of eastward passenger trains (except Train No. 56) will be turned up at Summit Switch, remainder of retainers to be turned up at Cameron without stopping, all retainers being used to Mojave. When retainers are thus used speed of trains must not exceed 45 miles per hour.

Retainers on all head end cars on Train No. 56 will be turned up at Tehachapi, remainder of retainers to be turned up at Cameron without stopping, all retainers being used to Mojave. When retainers are thus used speed of train must not exceed 45 miles per hour.

Unless otherwise provided, trains having not to exceed two head end cars available retainers will be used Cameron to Mojave and Tehachapi to Tunnel 1.

Retainers will be used on freight trains as follows:

Eastward trains.....Cameron to Mojave.

Eastward trains.....Vincent to Lang.

Westward trains.....Vincent to Harold.

Westward trains.....Tehachapi to Tunnel One.

Westward trains.....McKittrick to Lokern.

Eastward Southern Pacific freight trains stopping at Summit Switch will turn up retainers there, and if train brakes are applied a speed of 20 miles per hour must not be exceeded Summit Switch to one mile east of Cameron.

On freight trains descending grade Tehachapi to Tunnel 1, Cameron to Mojave and Vincent to Lang, one pressure retaining valve must be used for each 115 M's in train. These retaining valves to be used solid on head end of train.

Descending grade between Vincent and Harold, use ten retaining valves on head end of train.

Retainers will be used on other districts when in judgment of engine-men it is deemed necessary.

Speed of freight trains will be reduced at points where trainmen are required to handle retainers.

SPECIAL INSTRUCTIONS

Where retainers are used the rate of speed of freight trains on any grade of over one per cent will not exceed 25 miles per hour, and on grades of this character more than five miles long, for the first five miles the time consumed in traveling one mile shall not be less than three minutes. The above maximum speed restriction will not affect the speed on heavier grades and other locations, where the maximum is now provided. Retainers on eastward freight trains entering Mojave must not be turned down until train comes to rest on designated tracks.

Freight trains taking siding where it is necessary for them to open their own switch, and where necessary to apply train (automatic) brakes, stop and allow sufficient time to insure release of all brakes.

Conductor report to Superintendent, by wire, any failure to properly control train by air brakes and deliver to Car Inspector at first terminal list showing tonnage of each car in train. Car Inspector will add to list the piston travel of each car in train, as shown by test made before road engine is cut off, also result of three-minute test of all retainers. The list will then be forwarded to Superintendent by first mail.

The maximum tonnage per operative brake between Caliente and Mojave is 115 Ms and between Mojave and Saugus 120 Ms.

MISCELLANEOUS

1. Freight trains with twenty or more cars will detach engine when taking water except at the following stations:

All points on the Valley district	Lancaster....	Eastward trains
Caliente.....	Eastward trains	Ravenna.....
Woodford....	Eastward trains	Lang.....
		Westward trains

In freight service with over 30 cars where it is necessary to make a short move to reach water or oil column, including that required to spot second engine of double header, locomotive must be cut off before spotting at column.

Water supply at Bealville, Marcel and Cameron is for emergency use only. Tank spouts are locked.

Take as little water as possible at Cantil and take water at Palmdale, Lang and Haiwee only when absolutely necessary.

In taking water on freight trains with helper cut in, train will be cut ahead of first helper from head end and will back to point where it is to take water, except at Woodford where first helper spots at No. 3 water column. After stopping, train will be cut ahead of following helper.

4. Helpers will cut out at Vincent unless otherwise instructed. At Vincent, helpers on eastward freight trains are to be cut out at the west leg of wye or west end of siding.

Helper engines cutting out of eastward trains at Summit Switch, enter wye from east leg.

Should a stop be made short of a turnout at a point where helpers are to be cut out, cut will be made ahead of leading helper and train engine will pull head portion to clear, to prevent damage done by helper in shoving during short move.

In movement of light engines between Bakersfield and Mojave the number of engines coupled is restricted to four.

Helpers must be placed ahead of rear end cars.

purpose of pushing trains out of yards—No locomotive will be placed behind a wooden underframe caboose or other wooden frame equipment.

Locomotives of 4000 or 4100 class will not be placed behind steel underframe cabooses. In no case will more than one helper engine be placed behind steel underframe cabooses.

Air will not be coupled through the pusher engine.

Yard engines regularly so used will be equipped with Russell-Jordan device to hold the coupler pin from dropping, thus making it unnecessary for employes to uncouple the pusher engine when cutting off.

In no case shall the knuckle be removed, or closed, or cutting lever temporarily fastened in release position on a pusher engine, as means of preventing coupling being made.

It will not be necessary to stop trains to detach pusher engines.

5. Engines will not be left on No. 1 track at Tehachapi while crews are eating. When engines are left with no one attending, the reverse lever will be left on center, cylinder cocks will be left open, independent brake valve or straight air valve will be left in service position, noting amount of brake cylinder pressure before leaving the engine. No member of crew will leave their engine before engine has come to rest, and when engine or engines are left alone, tank brakes should also be set in addition to independent brakes.

This will apply at other points where similar conditions exist.

7. Engines heavier than large Moguls will not be permitted east of east switch Crump. Flanges of other engines proceeding farther must be thoroughly oiled before moving around curves.

Engines larger than Moguls will not be run between Hardwick and Riverdale. Engines larger than Moguls will not use spur at Maltermoro.

8. When engine is to be changed or cars set out or picked up, on passenger trains rear brakeman will open steam valve on rear of train and engineman will shut off the steam at yard limit boards Fresno, Bakersfield and Mojave, and station one mile boards at other points.

10. Tracks at following stations must not be used by engines larger than consolidation type. Spurs at Bena, Caliente, Gypsite, Toby, Garlock Wye and siding at Toby.

When switching the west end of Saltdale, with 2-10-2 engines, use sufficient number of cars to prevent engine from going beyond frog.

Switching movement from spurs on heavy grades should be accomplished in a manner to make it impossible for cars to run out on main track. This can be done by stopping train between switches and by switching from spur track to train, leaving switch lined for spur track until work is completed. Do not switch cars into a siding on grade where such siding is unprotected by derail. Do not handle cars ahead of engine descending grades when practicable to avoid same. Whenever possible, when switching on heavy grades, engine should be kept on down hill side of cars being handled, or such switching moves be made against a derailer.

When switching No. 1 track at Kingsburg Winery with engines larger than 2300 class, use a sufficient number of cars to prevent engines going beyond the frogs.

20. Handling of freight cars in trains behind passenger cars carrying passengers prohibited. The term "freight car" does not include a baggage, express or mail car, or a caboose.

Baggage, express, mail, refrigerator or other head end cars must not be handled on rear of passenger trains unless trainmen can pass through them.

Club cars handled in head end of main line passenger trains must be of all steel construction.

23. Following will govern the handling of switches for the center sidings at Warren and Monolith:

Westward Trains—Heading in.

Switches will be handled in following sequence:

1. Westward main track switch.
2. Center siding switch.
3. Derailing switch.

After Train is in siding.

1. Westward main track switch.
2. Derailing switch.
3. Center siding switch.

Eastward Trains.

Switches will be handled in normal manner.

27. In addition to one engineer, one firemen, and one conductor, each steam freight, mixed or work train must have two or more brakemen, as noted below, if more than four trains are operated each way per day:

Grade	No. Cars in Train	No. Brakemen
1% or under.....	49 or less.....	2
"	50 to 75 inclusive.....	3
"	76 to 100 "	4
"	101 to 125 "	5
1% to 1½%.....	49 or less.....	2
"	50 to 62 "	3
"	63 to 87 "	4
"	88 to 112 "	5
"	113 to 125 "	6
Over 1½%	49 or less.....	2
"	50 to 57 inclusive.....	3
"	58 to 72 "	4
"	73 to 87 "	5
"	88 to 102 "	6
"	103 to 117 "	7
"	118 to 125 "	8

The following are grade maximums on the San Joaquin division:

1% or under	1% to 1½%	Over 1½%
Fresno-Bakersfield	Bakersfield-Ilmon	Ilmon-Tehachapi
Clovis Branch	Tehachapi-Eric	Eric-Mojave
Riverdale Branch	Mojave-Rosamond	Palmdale-Saugus
Coalinga Branch	Success Branch	Owenyo Branch
Visalia Branch		McKittrick Branch
Stratford Branch		
Kerman Branch		
Richgrove Branch		
Arvin Branch		
Rosamond-Palmdale		

28. Train movements on Richgrove Branch will not be authorized by train orders. Trains using this Branch will do so under flag protection.

Flagman will be left at Richgrove with written instructions on Form CS 2511 regulating the movement of other trains desiring to use this track.

SPEED RESTRICTIONS

Maximum speed of any passenger train must not exceed 50 miles an hour except as otherwise provided for:
 Maximum speed of any freight or mixed train must not exceed 35 miles an hour except as otherwise provided for:
 Speed Restrictions in Miles Per Hour, Will Apply as Follows:

Page No.	TERRITORY	PASSENGER				FREIGHT	Engines Backing With or Without Cars	Yard Engines S-SE Type	LIGHT ENGINES RUNNING FORWARD				
		Maximum	With E T-26, 32, 37, 40 P A Motors	With M T 1, 2, 8, 9, 23, 28, 31, 36, 57, 58 MK 5, 6, 7, 8, 9	With Mt. GS Sta. Fe Mt. type				With C 2 to 10 Incl C 18 to 29 Incl. F AC 4, 5, 6, MM, AM SP	Freight and Mixed Maximum	E T 26, 32, 37, 40 P A Mt. 1, 2, 3, 4, 5 Santa Fe Mt. type	M T 1, 2, 8, 9, 23, 28, 31, 36, 57, 58 C 2 to 10 Incl. C 18 to 29 Incl. MK 5, 6, 7, 8, 9	F SP GS Santa Fe 3800 type
2	Biola Jct.-Calwa Tower, except	50	50	50	50	45	40	30	20	40	35	35	30
2	F. T. Co., Crossing, Olive Ave., Fresno	20	20	20	20	20	20	20	20	20	20	20	20
2, 3, 7	Within City Limits Fresno along or on across street crossings	20	20	20	20	20	20	12	12	12	12	12	12
2	Calwa Tower - 2 miles east of Fowler	55	55	50	55	40	40	30	20	40	35	35	30
2	Two miles east of Fowler - Mile Post 229	60	60	50	60	45	40	30	20	40	35	35	30
2	Mile Post 229 - Goshen Jct.	50	50	50	50	45	40	30	20	40	35	35	30
2	Goshen Jct.-East Switch Oil Jct., except	60	60	50	60	40	40	30	20	40	35	35	30
2	A. T. & S. F. Ry., crossing at Tulare Tower	40	40	40	40	40	40	30	20	40	35	35	30
2, 4	East switch Oil Jct. - One mile east Kern Jct.	35	35	35	35	35	20	20	20	20	20	20	20
3	Fresno-Famoso, except	45	45	45			30	30	20	30	30	30	30
3	On curves at Mile Post 218.54 and 218.74	35	35	35				20	20	20	20	20	20
3	On curve west of Orris	35	35	35				20	20	20	20	20	20
4	One mile east Kern Jct. - one mile west Ilmon	50	50	50	50	45	40	30	20	40	35	35	30
4	One mile west Ilmon - West Switch Tehachapi	30	30	28	28	28	20	15	20	25	25	20	20
4	West Switch Tehachapi - One Mile east of Cameron	50	50	50	50	45	35	30	20	35	35	30	30
4	One mile east of Cameron-Mojave, except	45	45	45	45	45	20	20	20	25	25	25	25
	Westward freight trains Mojave to one mile east of Cameron						35						
4, 5	Mojave Yard, between Standard Oil switch and extreme east switch	15	15	15	15	15	10	10	15	15	15	15	15
5	Mojave - Palmdale	55	55	50	55	45	40	30	20	40	35	35	30
5	Palmdale - Mile Post 417, except	50	50	50	50	45	40	30	20	40	35	35	30
	Westward freight trains M. P. 417 to Palmdale						22						
5	Mile Post 417-Lang	30	30	28	28	28	20	15	15	25	25	20	20
5	Lang-Saugus	30	30	28	28	28	22	15	15	25	25	22	22
6	Armona-Crump, except	25					25	25	20	25	25		
6	Over trestle at M.P. 267.3	15					15	15	15	15	15		
6	Crump-End of track	8					8	8	8	8	8		
6	Kerman-Goshen Jct.	30					30	30	20	30	30		
6	Goshen Jct.-Exeter, except	40					30	30	20	30	30		
6	On curve at Goshen Jct. and curve at Ambler	30					20	20	20	20	20		
6	Ingle - Hardwick, except	25					25	25	20	25	25		
6	Mile Post 219 - Kings River Bridge	15					15	15	15	15	15		
7	Fresno-Gordon, except	25					25	25	20	25	25		
7	On curves at Barton and Maltermoro	20					20	15	15	20	20		
7	Over Fresno Interurban tracks, Las Palmas	15					15	15	15	15	15		
7	Gordon-Friant	20					20	15	15	20	20		
7	Rossi-Stratford	12					12	12	12	12	12		
3	Porterville-Clavicle-Pernu, except	15					15	15	15	15	15		
3	On curves, Success and Pernu branches	12					12	12	12	12	12		
3	Richgrove-Jovista, except	25					25	25	20	25	25		
3	On curves, Richgrove branch	15					15	15	15	15	15		
7	Kern Jct.-M.P. 354 1/2	25					25	25	20	25	25		
7	Mile Post 354 1/2-Olig, except	20					20	15	15	20	20		
7	Mile Post 354-Olig, with large loaded oil cars	25					15	15	15	15	15		
7	Magunden-Arvin, except	25					25	25	20	25	25		
7	On curves, Arvin branch	15					15	15	15	15	15		
8	Mojave-Owenyo, except	30					30	30	20	30	30		
8	F-4&F-5 engines-Mojave-Searles	25					25	25	20	20	25		
8	Over west siding switch, Owenyo	10					10	10	10	10	10		

Speed of 60 miles per hour is permitted gas-electric motor car trains on main track between Fresno and Goshen Jct.

SPEED OF TRAINS REGULATED BY ORDINANCE THROUGH CITY LIMITS

Page	STATION	Passenger	Freight	Running Backward
2-3-7	Fresno, along or across street crossings	20	20	12
2	Fowler, between 5 A. M. and 11 P. M.	20	20	20
2	Selma, between 5 A. M. and 11 P. M.	20	20	20
2	Kingsburg, between 4 A. M. and 11 P. M.	20	20	20
2	Tulare, between 5 A. M. and 11 P. M.	20	20	20
3	Reedley, between 5 A. M. and 11 P. M.	20	20	20
3	Exeter, between 5 A. M. and 11 P. M.	20	20	20

Page	STATION	Passenger	Freight	Running Backward
3	Lindsay, between 5 A. M. and 11 P. M.	20	20	20
3	Porterville, between 5 A. M. and 11 P. M.	20	20	20
6	Hanford, between 5 A. M. and 11 P. M.	20	20	20
6	Armona, Lake Street Crossing	20	20	20
6	Visalia	15	15	15
2-4-8	Bakersfield, within city limits over street crossings	20	20	20

SPEED RESTRICTIONS

Speed restrictions for engines are shown in speed table; however, attention is called to the following maximum speeds at which tenders may be operated subject to restrictions imposed locally:

Tenders having water capacity, 7,000 gallons or less, except classes 70-R-1 and 70-SC-1, maximum speed 50 miles an hour.

Tenders having water capacity in excess of 7,000 gallons, and including classes 70-R-1 and 70-SC-1, maximum speed 60 miles an hour.

Engines operated coupled tender to tender must not exceed speed permitted for light engines of that class running backwards.

Maximum speed of disabled engines hauled in train, or running under own steam, must not exceed:

- When pilot removed..... 20 M.P.H.
- When main rod only removed..... 30 M.P.H.
- When side rods only removed..... 30 M.P.H.
- When both main and side rods removed..... 20 M.P.H.
- When hauled in train and all rods are on..... 30 M.P.H.
- GS engines..... 15 M.P.H.
- SP 1, 2 and when inside main rod removed..... 30 M.P.H.
- S and SE engines and all other classes of engines when not equipped with engine trucks..... 20 M.P.H.
- When all weight has been removed from any one pair of drivers on an engine, speed must not exceed..... 20 M.P.H.
- When all weight has been removed from one wheel of any pair drivers on an engine, speed must not exceed..... 30 M.P.H.

F-2, 3, 4, 5, SP-1, 2, 3, Santa Fe-3800 and AC type engine must not exceed 8 miles per hour backward movement over switch turnout.

When Santa Fe 3800 type engines are used in passenger service their speed is restricted to 45 miles per hour between Bakersfield and 1 mile east of Kern Jct., and west switch Tehachapi and Mojave and 25 miles per hour between 1 mile west Ilmon and west switch Tehachapi, other engines not shown in speed table must not exceed freight speed, except MC engines must not exceed 20 miles per hour between Lang and Saugus.

When interlocking signals at Caliente, Allard, Bealville, Woodford and Marcel indicate proceed trains may run at speed and through other interlocking plants with caution.

Trains must not exceed 30 miles per hour through limits of interlocking plant at Calwa Tower.

For speed over Oil Buffer Spring Switches, see list of such switches on Page 10 and be governed by speed given therein.

Through other cross-overs and turnouts trains must not exceed 10 miles per hour.

On sidings in territory between Bakersfield and Saugus trains will run with caution, not exceeding ten miles per hour.

Trains handling relief outfit must not exceed 25 miles per hour between Fresno and Bakersfield, Fresno and Famoso via Sanger, Kerman and Exeter, Bakersfield and one mile west of Ilmon, one mile west of Tehachapi and one mile east of Cameron, Mojave and Mile Post 417, and 20 miles per hour between one mile east of Cameron and Mojave, and must not exceed 15 miles per hour over other track. Where freight speed is less be governed thereby.

When locomotive Cranes, of the type SPMW 3636, are placed in trains, they must be handled with the heavy end forward, except where it is impossible to turn them, in which case they may be turned at the first available point.

In isolated cases, where it becomes absolutely necessary to handle these cranes with the light end forward, extreme care must be exercised and speed of 25 miles per hour not exceeded.

All cars moved in passenger trains must be equipped with steel-tired or all-steel wheels. When cars not so equipped are offered for movement, they will be handled in freight trains-passengers, if any, to move on passenger train.

(a) Wooden passenger-carrying cars, wooden baggage, express and other head-end cars, unless equipped with steel center sills and steel platforms, must not be used in passenger service except upon authority.

(b) Speed of trains handling such cars must be restricted as follows: When consist includes not more than three wooden passenger-carrying cars, maximum speed must not exceed 50 miles per hour.

When consist includes more than three wooden passenger-carrying cars, maximum speed must not exceed 40 miles per hour.

(c) If consist of train includes both wooden and steel passenger-carrying cars, the wooden cars must be kept together and handled on the rear.

SPECIAL INSTRUCTIONS

SPEED TABLE

Speed per Hour	1 Mile in Min. Sec.	Speed per Hour	1 Mile in Min. Sec.	Speed per Hour	1 Mile in Min. Sec.	Speed per Hour	1 Mile in Min. Sec.
6	10.00	25	2.24	39	1.33	53	1.08
8	7.30	26	2.18	40	1.30	54	1.06
10	6.00	27	2.13	41	1.27	55	1.05
12	5.00	28	2.08	42	1.25	56	1.04
15	4.00	29	2.04	43	1.23	57	1.03
16	3.45	30	2.00	44	1.21	58	1.02
17	3.31	31	1.96	45	1.20	59	1.01
18	3.20	32	1.92	46	1.18	60	1.00
19	3.09	33	1.89	47	1.16	61	0.99
20	3.00	34	1.85	48	1.15	62	0.98
21	2.91	35	1.82	49	1.13	63	0.97
22	2.83	36	1.79	50	1.12	64	0.96
23	2.76	37	1.76	51	1.10	65	0.95
24	2.70	38	1.73	52	1.09		

AVERAGE TARE WEIGHTS OF PASSENGER TRAIN CARS

CLASS	NOT AIR-CONDITIONED		AIR-CONDITIONED	
	All-Steel	Steel Underframe	All-Steel Cooling Season	All-Steel Heating Season
Baggage—60 ft.	93,070			
—66 ft.	127,610			
—70 ft.	122,620			
—70 ft. (With Auto. End Door)	125,800			
—(Dynamo)	98,730			
Baggage & Mail—60 ft.	103,620			
—69 ft.	124,760			
—70 ft.	129,140			
Passenger	108,675	112,640		
Express Refr.—N. P. Ry.		74,000		
—A. R. E. No. 40-154		78,000		
—155-224		89,000		
—500-506		110,000		
—1101-1175		85,000		
—P. F. E. 500-799		83,000		
Express, Horse	133,050			
Postal	112,120			
Postal Storage—40 ft.	74,530			
—60 ft.	105,120			
Club	146,210	122,300	160,726	153,710
Official	170,700	155,370		
Chair—60 ft.	100,620		112,985	108,120
—74 ft. (Ice Sys.)			180,915	173,125
—74 ft. (Steam Ejec. Sys.)			197,944	181,600
Coaches—60 ft.	98,130		110,380	105,630
—70 ft.	137,640		151,671	145,140
—72 ft.			153,782	147,160
—73 ft.			168,245	161,000
—72 ft. (Interurban)	120,000			
All-Day Lunch—Chair	105,970			
—Coach	103,875			
Cafe Coach		138,600	152,675*	146,100*
Diner—70 ft.		135,930		
—72 ft.		146,930		
—77 ft. (Arch Type Roof) (Ice Sys.)	155,330		170,857	163,500
—77 ft. (Cleric Story Roof) (Ice Sys.)	156,000		179,400	171,675
—77 ft. () (Mech. Sys.)		165,530	189,581	173,836
—79 ft.	169,100			
—80 ft. (Cleric Story Roof) (Mech. Sys.)			201,323	184,700
Cafe Parlor	148,950	161,200	160,198	153,350
Lounge			188,949	180,813
Observation—75 ft.	154,400		169,185	161,900
—77 ft.			194,543	186,166
Pullman-Observation (Ice Sys.)	160,800	153,000	177,314	169,200
(Mech. Sys.)	160,800	153,000	185,627	170,300
Lounge (Ice Sys.)	171,200		187,682	179,600
(Mech. Sys.)	171,200		196,963	180,700
Bedroom Car (Ice Sys.)	167,600		183,920	176,000
(Mech. Sys.)	167,600		193,039	177,100
Sleeper (Ice Sys.)	163,100		180,075	171,500
(Mech. Sys.)	163,100		188,134	172,600
Tourist (Ice Sys.)	153,000		168,663	161,400
(Mech. Sys.)	153,000		167,625	162,500
Rail Gas-Electric Car, 400 H.P.	158,400			
600 H.P.	167,200			

*Steel Underframe.

STRUCTURES LESS THAN STANDARD CLEARANCE

Mile Post	Location	Description
Fresno-Saugus—Main Track		
205.5	Fresno Shop Yard	Water tank spout.....Side
205.5	Fresno	Pullman shed.....Side
220.7	Selma	Libby-McNeill & Libby.....Side
313.2	Bakersfield, east end Round House lead	Water column.....Side
313.2	Bakersfield Emergency Column No. 4	Water column.....Side
313.2	Bakersfield, roundhouse turnout tracks	Sandhouse.....Side and Overhead
313.2	Bakersfield	P. F. E. ice dock.....Side
313.2	Bakersfield	Pullman shed.....Side
313.2	Bakersfield	Wheel unloading crane.....Overhead
313.2	Bakersfield	Coal house at store.....Side
313.2	Bakersfield	Air pump house.....Side
313.2	Bakersfield	Gravel Bunkers, Gravel Pit.....Side and Overhead
340.5	Bealville	Water tank spout.....Side
354.2	Marcel	Water tank spout.....Side
434.8	East of Russ	Tunnel 17 1/2.....Overhead
435.5	East of Russ	1st bridge, Santa Clara river.....Side
435.9	East of Russ	3rd bridge, Santa Clara river.....Overhead
436.1	East of Russ	4th bridge, Santa Clara river.....Side and Overhead
436.3	East of Russ	5th bridge, Santa Clara river.....Side and Overhead
436.8	East of Russ	7th bridge, Santa Clara river.....Side and Overhead
436.9	East of Russ	8th bridge, Santa Clara river.....Side and Overhead
437.4	East of Russ	10th bridge, Santa Clara river.....Side and Overhead
437.0	East of Russ	Tunnel 18.....Overhead
439.5	East of Lang	Tunnel 20.....Overhead
440.1	East of Lang	Tunnel 21.....Overhead
441.5	East of Lang	Tunnel 22.....Overhead
445.3	East of Humphreys	Tunnel 23.....Overhead
449.7	East of Honby	Tunnel 24.....Overhead
Fresno-Famoso via Porterville		
205.5	Fresno	S. J. L. & P. Corp. plant.....Side and Overhead
225.3	Fargo	Southern Pacific Freight Shed.....Side
257.4	Exeter	Water tank spout.....Side
Goshen Jct.-Coalinga-Kerman		
229.1	Armona	Water tank spout.....Side
268.4	Coalinga	Water tank spout.....Side
272.0	Leroy	Guy wire and Warehouse.....Side and Overhead
Fresno-Friant		
205.5	Fresno	Alley Drill Track, Fulton.....Side
217.4	Clovis	Water tank spout.....Side
Bakersfield-Olig		
345.4	Kilowatt	Power House.....Overhead and Side
Mojave-Owenyo		
402.5	Cantil	Water tank spout.....Side
426.8	West of Searles	Tunnel 29.....Overhead
484.1	Haiwee	Water tank spout.....Side
523.0	Owenyo	Highline trestle on Calif. Alkali Co. Spur.....Overhead and Side

LIST OF SURGEONS

NAME	TITLE	LOCATION
Dr. W. B. Coffey	Manager and Chief Surgeon	San Francisco, Cal.
Dr. J. D. Morgan	District Surgeon	Fresno, Cal.
Dr. Chas. A. James	Asst. District Surgeon	Fresno, Cal.
Dr. D. H. Trowbridge	Oculist and Aurist	Fresno, Cal.
Dr. O. B. Doyle	Asst. District Surgeon	Fresno, Cal.
Dr. J. D. Wagner	District Surgeon	Selma, Cal.
Dr. W. H. Nielson	District Surgeon	Fowler, Cal.
Dr. E. C. Halley	District Surgeon	Sanger, Cal.
Dr. G. A. Hawkins	District Surgeon	Reedley, Cal.
Dr. R. E. Cronemiller	District Surgeon	Exeter, Cal.
Dr. Edgar Brigham	District Surgeon	Dinuba, Cal.
Dr. O. A. Olson	District Surgeon	Kingsburg, Cal.
Dr. M. S. McMurtry	Emergency Surgeon	Clovis, Cal.
Dr. R. N. Fuller	District Surgeon	Tulare, Cal.
Dr. Geo. Dewees	Acting District Surgeon	Tulare, Cal.
Dr. J. Seiberth	District Surgeon	Pixley, Cal.
Dr. Henry A. Rivin	District Surgeon	Delano, Cal.
Dr. W. B. Smith	District Surgeon	Delano, Cal.
Dr. F. R. Guido	District Surgeon	Visalia, Cal.
Dr. C. T. Rosson	District Surgeon	Hanford, Cal.
Dr. J. C. Drake	District Surgeon	Kerman, Cal.
Dr. Geo. A. Meracle	Emergency Surgeon	Caruthers, Cal.
Dr. Wm. P. Byron	District Surgeon	Lemoore, Cal.
Dr. G. T. Mountford	District Surgeon	Coalinga, Cal.
Dr. P. S. Barber	District Surgeon	Porterville, Cal.
Dr. J. R. Tourtillott	Assoc. District Surgeon	Porterville, Cal.
Dr. J. R. Fillmore	Emergency Surgeon	Strathmore, Cal.
Dr. H. D. R. Shoemaker	District Surgeon	Lindsay, Cal.
Dr. H. W. Bell	District Surgeon	Bakersfield, Cal.
Dr. N. N. Brown	Consulting Surgeon	Bakersfield, Cal.
Dr. R. M. Jones	Oculist and Aurist	Bakersfield, Cal.
Dr. E. A. Shaper	District Surgeon	Woodford, Cal.
Dr. Harold L. Schlotthauer	District Surgeon	Tehachapi, Cal.
Dr. Phil J. Vogel	District Surgeon	Mojave, Cal.
Dr. M. A. Williamson	District Surgeon	Lone Pine, Cal.
Dr. Harvey Crook	District Surgeon	Bishop, Cal.
Dr. George D. Shultz	District Surgeon	Independence, Cal.
Dr. Thomas A. Drummond	Emergency Surgeon	Randsburg, Cal.
Dr. S. H. Savage	District Surgeon	Lancaster, Cal.
Dr. J. B. Price	District Surgeon	Palmdale, Cal.
Dr. E. C. Innis	District Surgeon	Saugus-Newhall, Cal.
Dr. R. W. Johnson	District Surgeon	San Fernando, Cal.

Note.—Emergency Surgeons should be summoned only for temporary treatment when prompt attention is required and when patients cannot be sent to or await arrival of Division or District Surgeon.

LOCATION OF HOSPITAL STRETCHERS

FRESNO	BAGGAGE ROOM	MOJAVE	BAGGAGE ROOM
	STORE ROOM		CAR SHOPS
	RELIEF TRAIN		
GOSHEN JUNCTION		SAUGUS	
BAKERSFIELD	BAGGAGE ROOM	EXETER	PORTERVILLE
	EMERGENCY HOSPITAL		COALINGA
	RELIEF TRAIN		HANFORD
	CAR SHOPS		OWENYO
		MACHINE SHOPS	

LOCATION OF HOSPITALS

GENERAL HOSPITAL	SAN FRANCISCO
EMERGENCY HOSPITAL	BAKERSFIELD
WHITE MEMORIAL HOSPITAL	LOS ANGELES

Employees are warned that it is dangerous to ride on top or sides of cars at above-mentioned points. Employees must guard against coming in contact with overhead wires or their connections.

RATING OF LOCOMOTIVES—SAN JOAQUIN DIVISION

In M's of 1000 Lbs. Back of Tender.

Nominal Class	Official Class	Engine Numbers	Boiler Pressure	Bakersfield and Fresno via Goshen Jct., Bakersfield and Kerman via Armona	Famoso and Fresno, via Exeter	Rosamond and Lancaster	Bakersfield to Rosamond	Lancaster to Saugus	Saugus to Lancaster	Rosamond to Bakersfield
M-4	M-63 20/28 135-S	1617 to 1713.....	190	4150	3300	4150	580	750	680	680
M-4	M-63 20/28 126	1617 to 1713.....	190	3950	3150	3950	580	740	670	670
M-8	M-63 21/28 159-S	1721 to 1803.....	200	4850	3800	4850	700	900	820	820
M-6	M-63 21/28 150-S									
M-9	M-63 21/28 150-S	1806 to 1822.....	210	5100	4050	5100	760	970	890	890
M-11	M-63 21/28 153-S	1831.....	210	5100	4050	5100	780	1000	910	910
M-11	M-63 22/28 153-S & 162-SF	1832 to 1835.....	200	5300	4200	5300	780	1000	910	910
T-1	T-63 20/26 112	2238 to 2271.....	180	3550	2800	3550	500	640	580	580
T-23	T-63 21/28 156-S	2301 to 2310.....	210	5050	4000	5050	730	940	850	850
T-23	T-63 21/28 163-SF									
T-28, 31	T-63 22/28 162-S	2311 to 2362.....	210	5550	4400	5550	820	1050	950	950
T-32	T-69 23/28 174-S	2363 to 2370, 2372 to 2384.....	210	5700	4500	5700	860	1050	990	990
P-1, 3, 5	P-77 22/28 141-S	2400 to 2452, 2459, 2460.....	210	4600	3600	4600	630	800	740	740
P-4	P-77 23/28-155/B 58-SF	2400 to 2437.....	210	5000	3950	5000	690	870	800	800
P-6	P-77 25/28 172-S	2453 to 2458.....	200	5650	4450	5650	810	1000	940	940
P-10	P-73 25/30 181-SF	2478 to 2483.....	200	6250	4950	6250	830	1100	980	980
P-10	P-73 25/30-183/B-63-SF.....	2484 to 2491.....								
C-9, 10	C-57 22/30 200-SF	2513 to 2599, 2698 to 2860.....	210	6100	4800	6100	900	1150	1050	1050
C-9, 10	C-57 22/30 194-S									
C-8	C-57 22/30 192-S									
C-5	C-57 22/30 187-S									
C-5	C-57 22/30 185-S									
A-6	A-81 22/28-127/B-64-SF	3000 to 3003.....	210	4400	3450	4400	600	750	690	690
A-3	A-81 20/28 112-S	3025 to 3040, 3043 to 3071.....	210	3600	2850	3600	450	580	530	530
A-3	A-81 20/28-116/B-59-S	3025 to 3040, 3043 to 3071.....								
Mk-5, 6	Mk-63 26/28 210-S.....	3241 to 3277.....	210	7800	6200	7800	1200	1500	1350	1350
Mk-5, 6	Mk-63 26/28 231-SF	3300 to 3324.....	176	8550	6750	8550	1300	1650	1500	1500
Mk-7, 8, 9	Mk-63 29/30 247-S & 257-SF									
F-1	F-63 27 1/2 273-S	3611 to 3652.....	200	8900	7050	8900	1300	1700	1550	1550
F-4, 5	F-63 29 1/2 32-306/B-61-SF	3668 to 3768.....	200	10,200	8050	10,200	1500	1950	1750	1750
F-5	F-63 29 1/2 32-306/B-62-SF									
AC-1, 2, 3	AC-57 2 1/2 441-SF	4000 to 4048.....	210	12,300	9750	12,300	1900	2450	2200	2200
AC-4	AC-63 2 1/2 475-SF	4100 to 4125.....	235	16,000	12,700	16,000	2500	3200	2900	2900
AC-5	AC-63 2 1/2 483-SF									
Mt-1,3,4,5	Mt-73 28/30-246/B-60-SF	4300 to 4376.....	210	8350	6600	8350	1150	1500	1350	1350
SP-1	SP-63 2 1/2 316/B-60-SF	5000 to 5048.....	225	12,000	9500	12,000	1800	2350	2100	2100
SP-2, 3	SP-63 2 1/2 317/B-61-SF									

MAIN LINES		Owned By	
SAN JOAQUIN DIVISION:			
End Western Division to Goshen Jct.....	C. P. Ry.....	40.10	
Goshen Jct. to Saugus.....	S. P. R. R.....	211.02	
Fresno to Famoso, via Exeter.....	S. P. R. R.....	103.95	
Total main Lines.....			355.07
BRANCHES		Owned By	
Arvin.....	S. P. Co.....	Magunden to Arvin.....	16.89
Clovis.....	S. P. R. R.....	Fresno to Friant.....	24.14
Coalinga.....	S. P. R. R.....	Armona to Le Roy.....	43.08
Fresno Interurban. F. I. Ry. Co. (Barton to Hammond).....			2.29
Fresno Interurban. F. I. Ry. Co. (Barton to Belmont Ave.).....			14.60
Kerman..... S. P. R. R..... Kerman to Goshen Jct., via Armona.....			51.37
McKittrick..... S. P. R. R..... Bakersfield to Olig.....			50.07
Minkler Southern. A. T. & S. F. Ry. Porterville to Ducor.....			12.53
Oil City..... S. P. R. R..... Oil Junction to Oil City.....			6.76
Owenyo..... C. P. Ry..... McJave to Owenyo.....			143.15
Pernu..... S. P. Co..... Pernu Jct. to Pernu.....			1.48
Richgrove..... S. P. R. R..... Richgrove to Jovista.....			4.16
Riverdale..... S. P. R. R..... Ingle to Hardwick.....			42.15
Stratford..... S. P. R. R..... Rossi to Stratford.....			8.26
Success..... S. P. Co..... Porterville (Olive St.) to Clavicle.....			13.43
Visalia..... S. P. R. R..... Goshen Junction to Exeter.....			16.76
Total Branches.....			451.12
Total San Joaquin Division.....			806.19

Allowance for Empty and Underloaded Cars.....	Less than 40 Ms.....	6	6	6	3	3	3	3
	40 Ms. to 50 Ms.....	3	3	3	0	0	0	0
	More than 50 Ms.....	0	0	0	0	0	0	0

These ratings include the total weight of train, exclusive of engine and tender, which the different class of locomotives will haul in each direction between the stations shown.

CLASS "C"—Consolidation engine "M"—Moguls "Mk"—Mikado "E"—Eight-wheeler
 "T"—Ten-wheelers "TW"—Twelve-wheelers "P"—Pacific Type

Example:—Consolidation engine having 57-inch drivers, Cylinders 22-inch diameter and 30-inch stroke, and weighing 187,000 pounds on Drivers: C-57 $\frac{22}{30}$ 187


C. G. TANDY, Trainmaster, Fresno

~~W. E. MAHONEY, Trainmaster, Mojave~~ Discontinued Jan. 31, 1938.

A. H. HOFFMAN, ~~Road Foreman of Engines~~, Bakersfield
 Trainmaster - Road Foreman of Engines
 Appointed Feb. 1, 1938.

E. F. WASEM, Chief Dispatcher,
 P. E. TURNER, Asst. Chief Dispatcher,
 J. S. FOCKLER, Asst. Chief Dispatcher.

~~L. P. HOPKINS, Asst. Superintendent.~~ Transferred
 B. W. MITCHELL,
 Appointed Sept. 16, 1937.

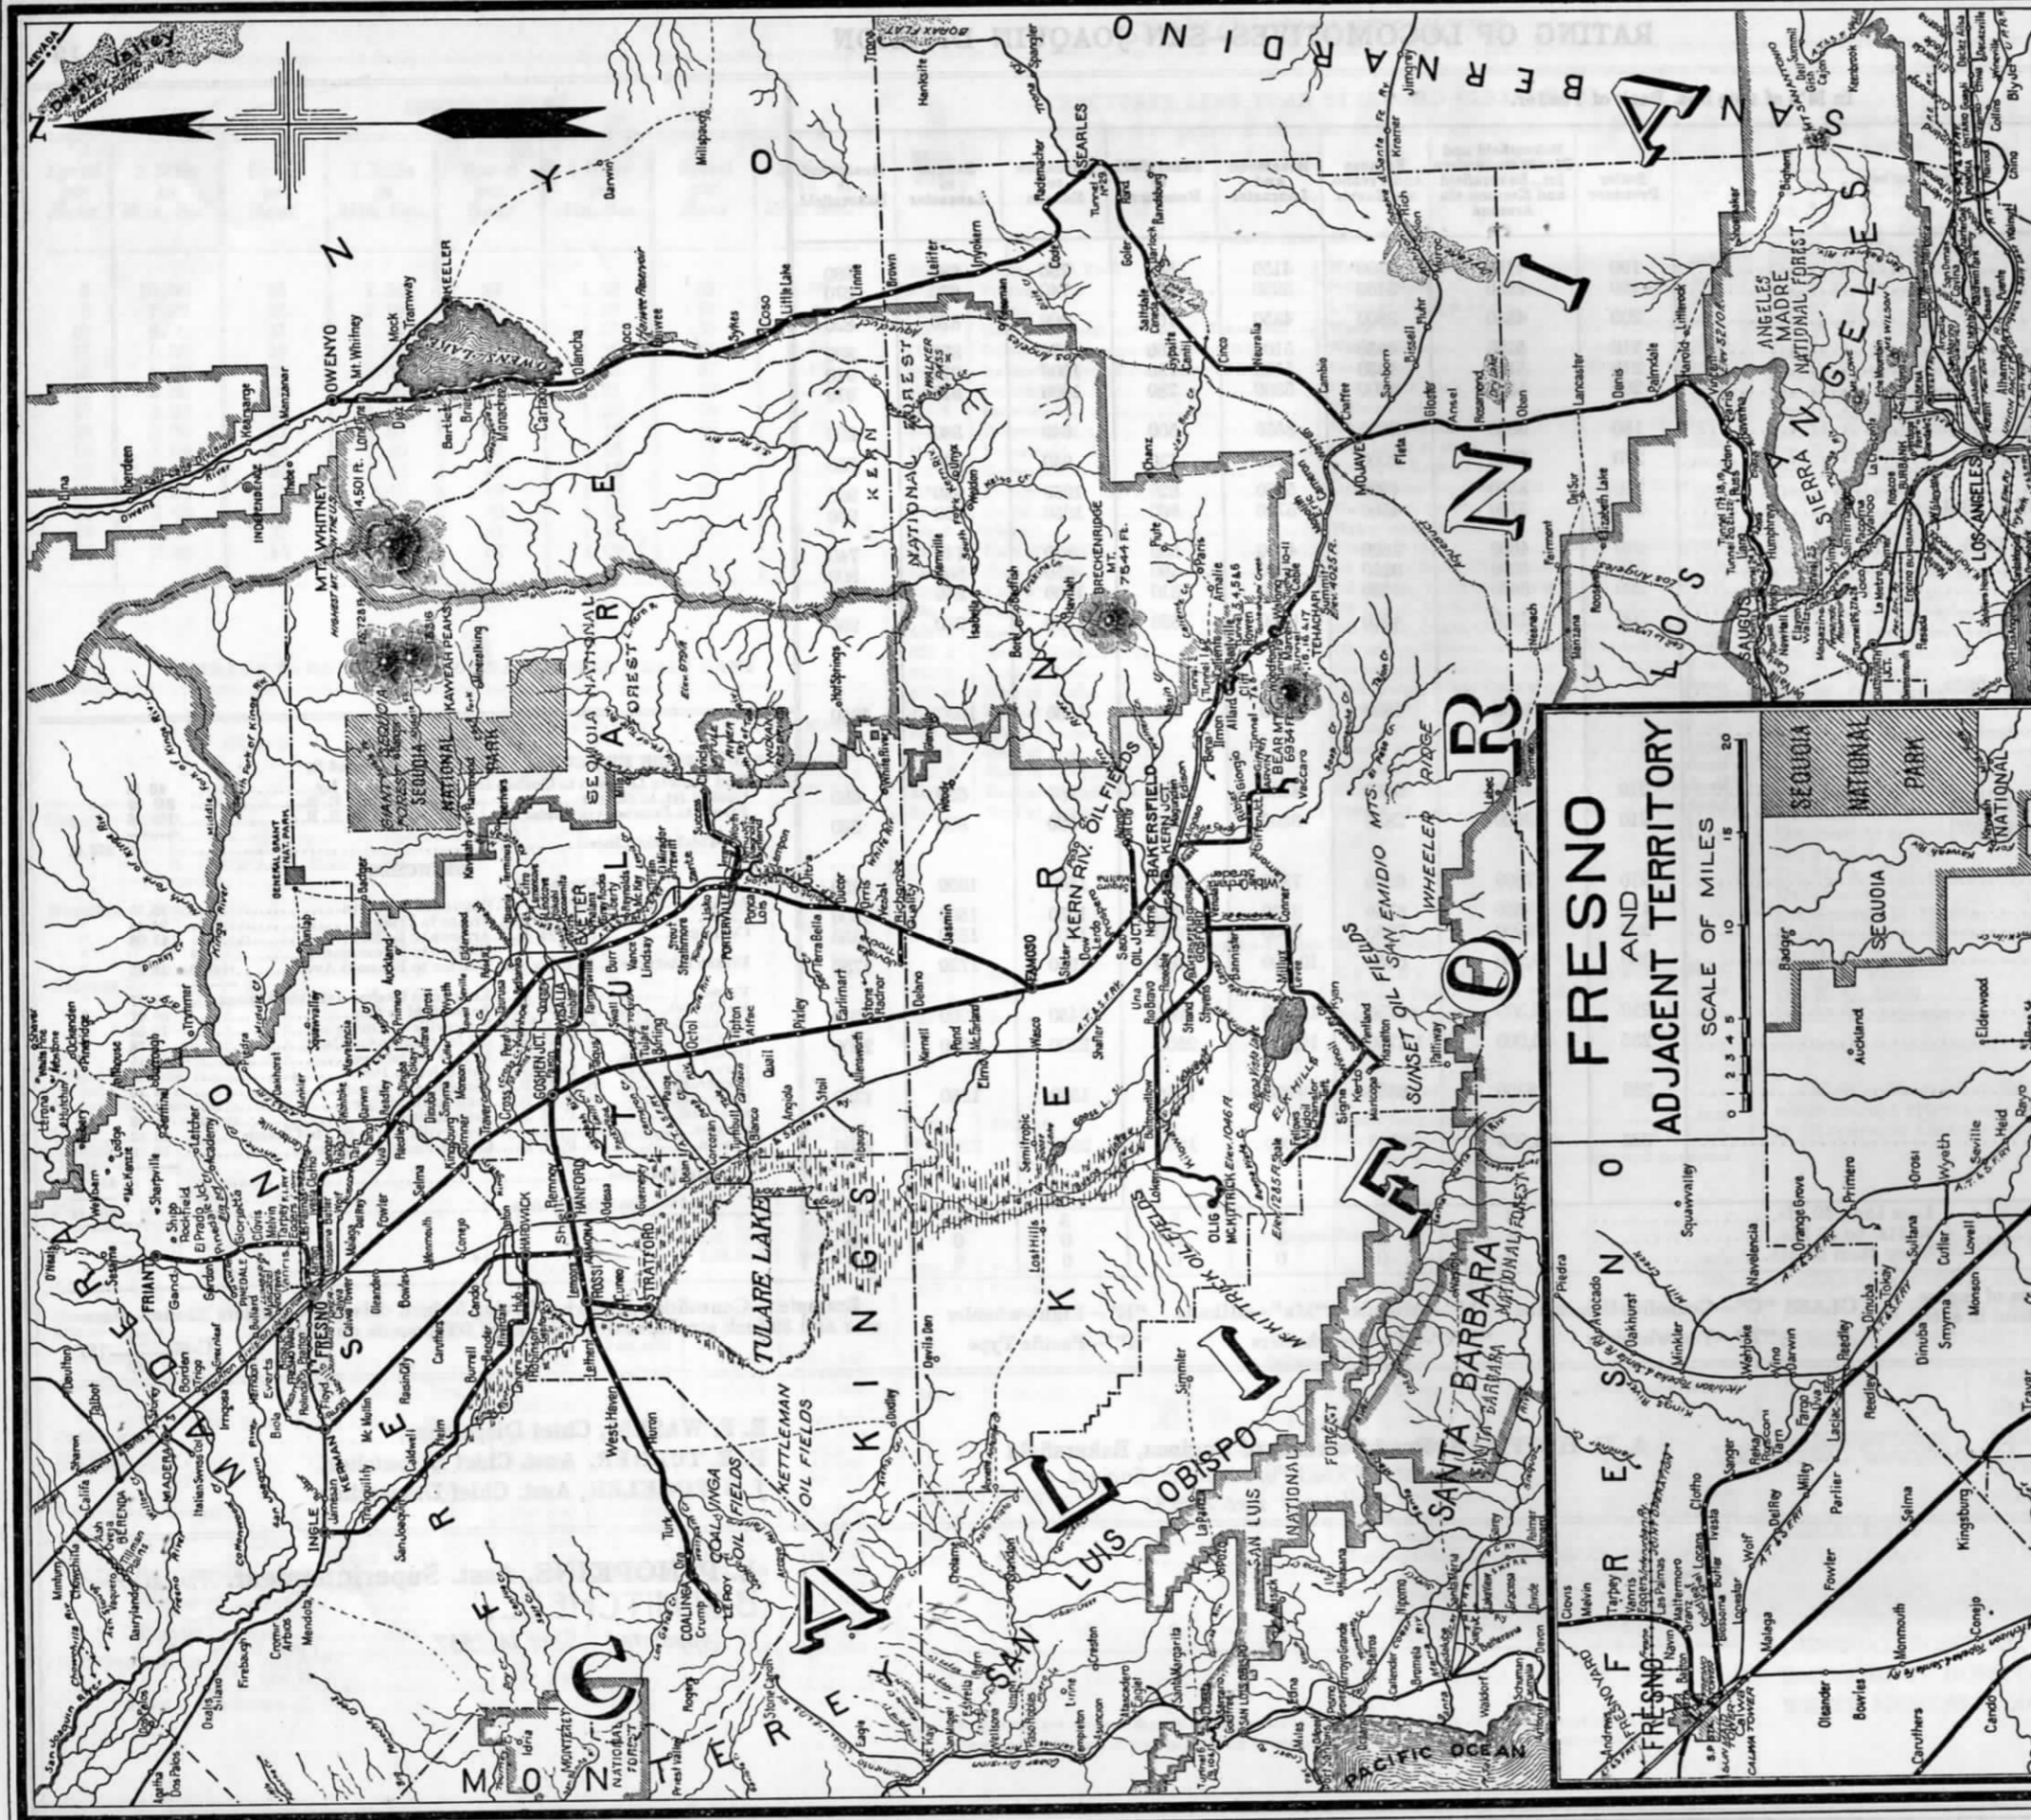

**MAP OF THE
SAN JOAQUIN
DIVISION**
SOUTHERN PACIFIC COMPANY
JUNE, 1918.
J. F. M.

REVISED OCT. 6, 1918
JAN. 1, 1920
JAN. 1, 1922
JAN. 1, 1925
FEB. 15, 1926
JULY 7, 1929
JAN. 1, 1931

